Lincoln-Lancaster County Health Department
Environmental Public Health Division (402) 441-8027
3140 N Street Lincoln, Nebraska 68510-1514

ON-SITE WASTE WATER SYSTEM
CONSTRUCTION - INSTALLATION PERMIT
No. HS000748

System Type: Lagoon

Situs: 8354 W ROCK CREEK RD, RURAL, NE

Issued: 5/7/2013

Expires: 5/7/2014

Description: S14, T12, R5, 6th Principal Meridian, LOT 21 SW

Owner: MORRIS, JON C & KATHLEEN A
8354 W ROCK CREEK RD
RAYMOND, NE 68428

Judith A Halstead
Judith A. Halstead, MS, Health Director

Dear Applicant:

The above document is your permit to construct a new On-site Waste Water System at the location listed. Please contact this office once the sytem is complete in order to schedule a final inspection before use.

Judith A Halstead
Judith A. Halstead, MS
Health Director

RAYMOND CONTRACTING
13800 NW 70TH
RAYMOND, NE 68428

Lincoln-Lancaster County Health Department
Environmental Public Health Division
3140 N Street • Lincoln NE 68510-1514
Phone: 402-441-8643

APR 29 2013

A

Permit Number
H5000748

Onsite Wastewater Treatment System
Request for Site Clearance and Permit

Include Form B and C.
Submit correct fee
with this Application

3 acres or more required for: ☐ Septic System ☒ Lagoon ☐ Other (Refer to Form C)

The undersigned hereby requests site clearance and permit to construct a Wastewater Treatment System in conformance with appropriate regulations.

PLEASE PRINT OR TYPE

A. Onsite System Location

Address 8354 W Rock Creek Rd (no rural route) City Raymond, NE Zip 68428

Legal Description SW 14 12 5 21
1/4 1/4 Section Township Range Subdivison Addition Block Lot

PID 06-14-300-004-000

B. Owner

Name Jon + Kathleen Morris Signature Kathleen A. Morris

Address 8354 W Rock Creek Rd City/State/Zip Raymond, NE 68428

Home Phone 402-784-0000 Work Phone

C. Certified Installer

Name: Lloyd Jakubek, Raymond Contracting Signature Kevin L. Jakubek for Lloyd

Address 13800 NW 70th St City/State/Zip Raymond, NE 68428

Work Phone 402-840-6009

D. Engineer ☐ **Check and complete if engineer designed system** P.E. License Number:

Designer Name Firm Work Phone

E. This system will serve a

☒ Residential Dwelling Number of Bedrooms 4 Whirlpool Bathtub? ☒ Yes ☐ No Total Acres 4.44
Garbage Grinder? ☒ Yes ☐ No

☐ Commercial Establishment/Other Facility Specify Design flow in gallons per day

Type of Wastewater ☐ Domestic ☐ Non-Domestic

DO NOT WRITE BELOW THIS LINE

Approval Process ☐ Municipal Code 24.38 ☑ County Resolution No. 02-30

1. Health Department
Site visits
Comments
Date rec'd 5/21/13
Date frwd 5/21/13
ACTION ☐ Approved ☐ Disapproved
Signature

2. Supt. Bldg. Insp. or Village Clerk
Comments
Date rec'd
Date frwd
ACTION ☐ Approved ☐ Disapproved
Signature

3. City or County Engineer
Comments
Date rec'd
Date frwd
ACTION ☐ Approved ☐ Disapproved
Signature

Installation Final Written Approval
By
Date

Business Office Use Only
Date Received 7-16-13 Amount Paid 355.-
Received By B. Hall Cash/Check No. 8090

White - Health Department Yellow - Engineer Pink - Building & Safety

Form A Updated: 1/13

7644
7204

* Existing property

Lincoln-Lancaster County Health Department
Environmental Health Division
3140 "N" Street • Lincoln, NE 68510-1514
Phone: 402-441-8022

B

Permit Number:

Sewage Disposal System
Soil Absorption Test Data Report
Annex to Application

PLEASE PRINT OR TYPE

System Location (Indicate correct number and street)

Address 8354 W Rock Creek Rd (no rural route) City Raymond NE, Zip 68428

Owner Jon & Kathleen Morris Addresss Same

Soil Type (SCS): Silty clay loam Percolation Rate: failed min./inch

Date of Tests 3/27/13 to 3/28/13 Weather: Precipitation D Temperature 40°

Percolation Test Data Table

A.	B.	C. D. E. F. Pre-Saturation Period				G. H. I. J. K. Percolation Readings					L. M. N. Results		
		Start		End		Start			End				
Hole No.	Hole Depth (in)	Date (Mo/Da)	Time (Hr/Min)	Date (Mo/Da)	Time (Hr/Min)	Date (Mo/Da)	Time (Hr/Min)	Water Lev (in.)	Date (Mo/Da)	Time (Hr/Min)	Elapsed Time (Min)	Water Level Drop (in)	Percolation Rates (Min/in)
1	36	3/27	10:30a	3/27	2:30p	3/28	8:00a	6	3/28	8:30a	30	1/16	500
2	41	"	"	"	"	"	"	"	"	"	"	5/16	97
3	37	"	"	"	"	"	"	"	"	"	"	7/16	68
4	30	"	"	"	"	"	"	"	"	"	"	3/16	158
5	27	"	"	"	"	"	"	"	"	"	"	1/16	500
6	33	"	"	"	"	"	"	"	"	"	"	1/8	231

Person Conducting Percolation Tests

Name: Terri Jakoubek, Raymond Contracting, Inc.

Phone: 402-783-2663 or 402-890-3870

Address 13800 NW 70th St
Raymond, NE 68428 #C1198

Sum of Percolation Rates: 1554

Average of Rates: 259

Rate Used for Calculation: failed

DO NOT WRITE BELOW THIS LINE

Reviewing Action

Remarks _____

Signature of Reviewing Official _____ Date _____

READ THOROUGHLY

DIAGRAM OF PERCOLATION TEST PROCEDURE

Finished Grade or Natural Ground Level


I. Size, Number, and Location or Test Holes

A. Dig six or more holes spaced uniformly over proposed lateral field site.

B. Scratch smeared spots on sides of hole.

C. Remove loose material from hole.

D. Add 2" of gravel to hole.

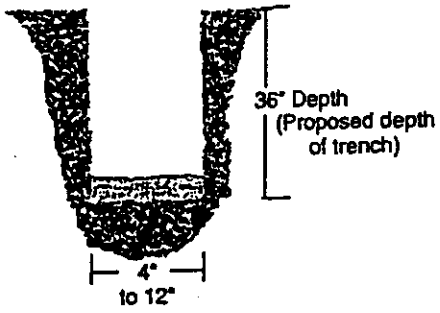


II. Saturation of Soil (Pre-soak)

A. Fill hole with 12" or more of water.

B. MAINTAIN THIS WATER LEVEL FOR 4 HOURS.

C. Record on Form B columns a thru f.

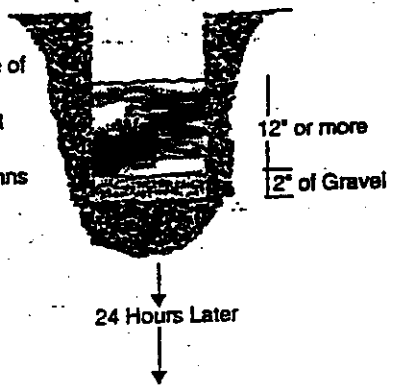


24 Hours Later

III. Percolation-rate Measurement (refer to instructions 5a, 5b, or 5c.)

A. Add 6" of water.

B. Measure from fixed reference point (nail) to water.


C. Record measurement and time on front of Form B.

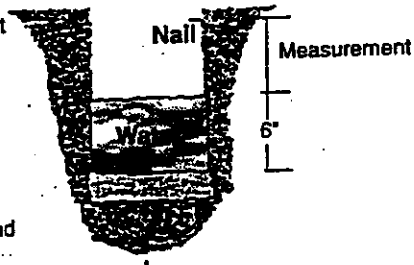

½ hour later (30 minutes)

D. 30 minutes later remeasure and record time.

E. If water will be too low for another reading 30 minutes later, adjust to 6" of water and remeasure and record time.

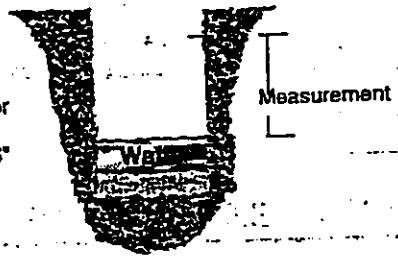

F. Continue for 3½ hours taking readings every 30 minutes.

G. Last 30 minute reading is used in filling out Form B. Record date, time, intervals and water level drops in column g thru m.

Instructions

1. **Number and location of tests.** Percolation tests shall be made in 6 or more separate test holes which shall be spaced uniformly over the proposed lateral field site.
2. **Type of test hole.** Dig or bore a hole 3 feet deep with a diameter of 4 to 12 inches. (To save time, labor and the volume of water required per test, a 4-inch auger hole is recommended).
3. **Preparation of the test hole.** Scratch or roughen any smeared spots on the sides of the hole with a knife blade or sharp pointed instrument to provide a natural soil interface into which water may percolate. Remove all loose material from the hole. Add 2 inches of gravel to protect the bottom from scouring when water is poured into the hole.
4. **Saturation and swelling of the soil.** Fill the hole with clear water to a depth of 12 inches or more above the gravel and maintain this water level at least 4 hours and preferably overnight. The accuracy and true value of the percolation data depends on thorough saturation and swelling of the soil.
5. **Percolation-rate measurement.** Percolation-rate measurements shall be made 24 hours after starting the saturation and swelling procedure described above. Record results on the front of this form and complete all calculations.
   a. If water remains in the test hole after the overnight swelling period, adjust the depth to approximately 6 inches over the gravel. From a fixed reference point, measure the drop in water level over a 30 minute period to the nearest 1/8 of an inch. This drop is used to calculate the percolation rate.
   b. If no water remains in the test hole after the overnight swelling period, add clear water to bring the depth to approximately 6 inches over the gravel. From a fixed point, measure the drop in water level to the nearest 1/8 of an inch at 30-minute intervals for 4 hours. Refill to the 6 inch level over the gravel as often as necessary. The drop that occurs during the final 30 minutes is used to calculate the percolation rate.
   c. In sandy soils (or other soils in which the first 6 inches of water seeps away in less than 30 minutes after the overnight swelling period) the time interval between measurements shall be 10 minutes instead of 30 minutes and the test run for 1 hour instead of 4 hours. The drop that occurs during the final 10 minutes is used to calculate the percolation rate.
6. **Record the test results and complete all calculations on the front of this form.** The average of the percolation rates calculated for all holes in the last 30 (10) minutes will normally be the rate used for calculations to size the system. ***Exceptions are the use of the greatest percolation rate when rates vary more than 20 min/in between holes or when other soil analysis indicates potential percolation problems.***

LLCHD reserves the right to require additional testing based on knowledge of soil types, percolation tests results on nearby properties, or due to concerns with procedures followed. In some situations, LLCHD staff will require and perform on-site observation of percolation tests.


Lincoln-Lancaster County Health Department
Environmental Health Division
3140 "N" Street • Lincoln, NE 68510-1514
Phone: 402-441-8022

C

Permit Number:

Sewage Disposal System
Preliminary Plan Specifications

Draw a plot plan showing system location, lines, distribution box, tank and laterals, percolation test hole locations, well, residence, compass direction and property lines. Indicate on drawing if residence and well are existing or proposed.

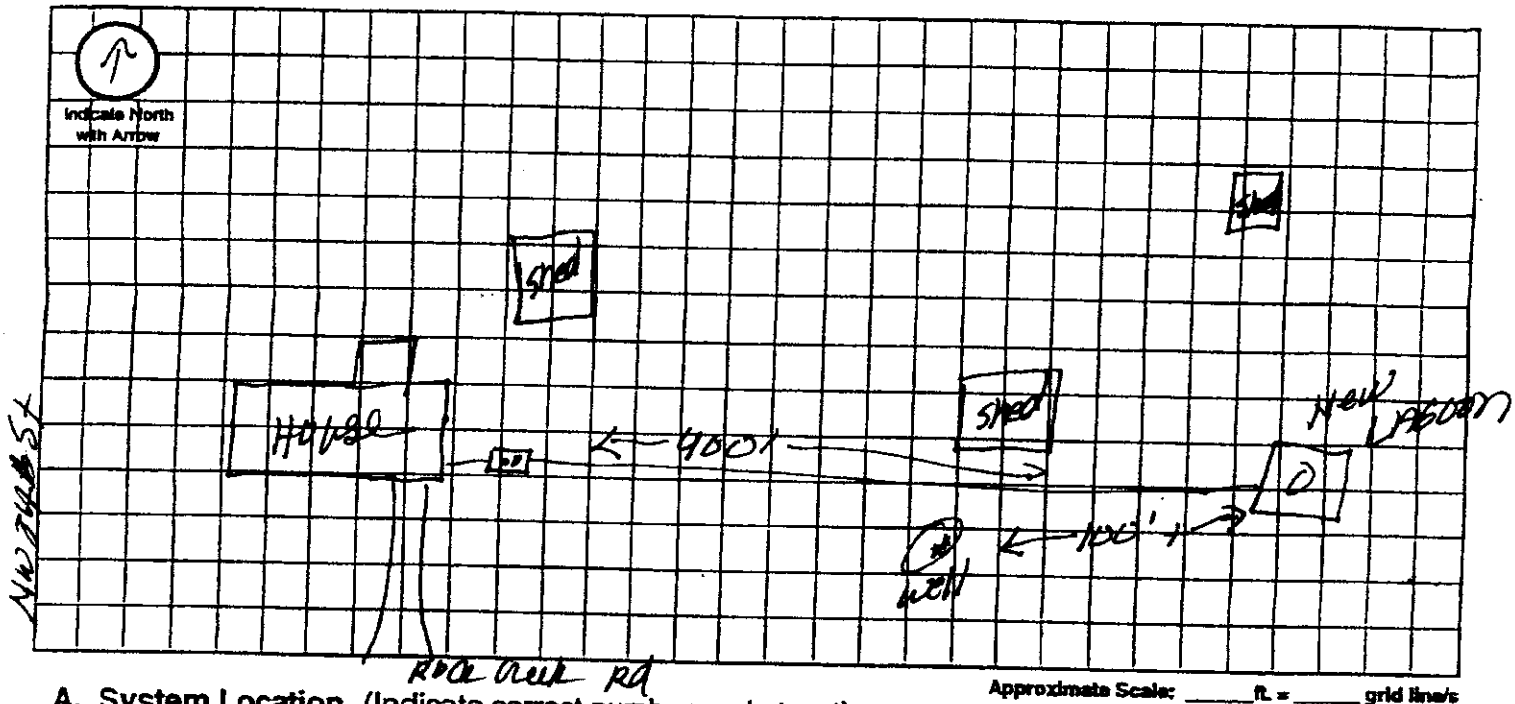

A. System Location (Indicate correct number and street)

Address (no rural route) 8354 W Rock Creek Rd City Raymond NE, Zip 68428

B. Proposed Septic Tank/s

Tank Material: ☐ Concrete ☐ Plastic ☐ Other _____

C. Proposed Absorption System (See Form B for Percolation Information)

Percolation Rate _____ (min. per inch) Soil Type: _____ Land Slope: _____ %

Type of Absorption System: ☐ Trench ☐ Bed ☐ Other _____

Total Square Feet of Field Required: _____ sq. ft.

Type of Lateral: ☐ Half-Moon ☐ Perforated Pipe ☐ Other Lateral Material: _____

Capacity of Septic Tank _____ gals Number of Absorption Beds: _____ Number of Distribution Laterals per Bed _____

Total Length of Laterals _____ ft. Number of Trenches _____ Trench Width _____

D. Setbacks Check the Boxes Below if the Required Setback has been Satisfied

Distance From	Private Well	Public Well	Surface Water	Gound Water	Pressure Water Lines	Property Lines	Foundations Yours	Foundations Neighbors	All Other Setbacks
Tank (ft)	50 ☐	500 ☐	50 ☐	NA ☐	25 ☐	20 ☐	15 ☐	25 ☐	☐
Field (ft)	100 ☐	500 ☐	50 ☐	4 ☐	30 ☐	20 ☐	30 ☐	40 ☐	☐
Lagoon (ft)	100 ☒	500 ☒	50 ☒	N/A ☐	30 ☒	50 ☒	100 ☒	200 ☒	☒

E. Required Signatures

Home Building Contractor (owner) [redacted] Kathy Morris Date 4/25/2013

Installer Kevin A. Johnson Date 4-19-13

FORM 23-102 10-96

SCANNED

Lincoln-Lancaster County Health Department
Environmental Public Health Division
3140 N Street • Lincoln NE 68510-1514
Phone: 402-441-8643

APR 29 2013

A

Permit Number
H5000748

Onsite Wastewater Treatment System
Request for Site Clearance and Permit

Include Form B and C.
Submit correct fee with this Application

3 acres or more required for: ☐ Septic System ☒ Lagoon ☐ Other (Refer to Form C)

The undersigned hereby requests site clearance and permit to construct a Wastewater Treatment System in conformance with appropriate regulations.

PLEASE PRINT OR TYPE

A. Onsite System Location

Address 8354 W Rock Creek Rd (no rural route) City Raymond, NE Zip 68428

Legal Description SW 14 12 5 21
1/4 1/4 Section Township Range Subdivison Addition Block Lot

PID 06-14-300-004-000

B. Owner

Name Jon + Kathleen Morris Signature Kathleen A. Morris

Address 8354 W Rock Creek Rd City/State/Zip Raymond. NE 68428

Home Phone 402-784-0000 Work Phone

C. Certified Installer

Name: Lloyd Jakoubek, Raymond Contracting Signature Lloyd Jakoubek for Lloyd

Address 13800 NW 70th St City/State/Zip Raymond, NE 68428

Work Phone 402-840-6009

D. Engineer

☐ Check and complete if engineer designed system P.E. License Number:

Designer Name Firm Work Phone

E. This system will serve a

☒ Residential Dwelling Number of Bedrooms 4 Whirlpool Bathtub? ☒ Yes ☐ No Total Acres 9.44
Garbage Grinder? ☒ Yes ☐ No

☐ Commercial Establishment/Other Facility Specify Design flow in gallons per day

Type of Wastewater ☐ Domestic ☐ Non-Domestic

DO NOT WRITE BELOW THIS LINE

Approval Process ☐ Municipal Code 24.38 ☒ County Resolution No. 02-30

1. Health Department
Site visits Existing Lagoon 6/7/13-DH
Comments
Date rec'd 5/2/13
Date frwd 5/2/13
ACTION ☒ Approved ☐ Disapproved
Signature

2. Supt. Bldg. Insp. or Village Clerk
Comments
Date rec'd
Date frwd
ACTION ☐ Approved ☐ Disapproved
Signature

3. City or County Engineer
Comments
Date rec'd
Date frwd
ACTION ☐ Approved ☐ Disapproved
Signature

Installation ~~Final~~ Written Approval
By
Date 6/12/13

Business Office Use Only
Date Received 5-6-13 Amount Paid 355.-
Received By B. Hall Cash/Check No. 8090

White - Health Department Yellow - Engineer Pink - Building & Safety

Form A Updated: 1/13

7644
7206

* Existing property

SCANNED

B

Lincoln-Lancaster County Health Department
Environmental Health Division
3140 "N" Street • Lincoln, NE 68510-1514
Phone: 402-441-8022

Permit Number:

Sewage Disposal System
Soil Absorption Test Data Report
Annex to Application

PLEASE PRINT OR TYPE

System Location (Indicate correct number and street)

Address 8354 W Rock Creek Rd (no rural route) City Raymond NE, Zip 68428

Owner Jon & Kathleen Morris Addresss Same

Soil Type (SCS): Silty clay loam Percolation Rate: failed min./inch

Date of Tests 3/27/13 to 3/28/13 Weather: Precipitation D Temperature 40°

Percolation Test Data Table

A.	B.	C. D. E. F. Pre-Saturation Period				G. H. I. J. K. Percolation Readings					L. M. N. Results		
		Start		End		Start			End				
Hole No.	Hole Depth (in)	Date (Mo/Da)	Time (Hr/Min)	Date (Mo/Da)	Time (Hr/Min)	Date (Mo/Da)	Time (Hr/Min)	Water Lev (in.)	Date (Mo/Da)	Time (Hr/Min)	Elapsed Time (Min)	Water Level Drop (in)	Percolation Rates (Min/in)
1	36	3/27	10:30a	3/27	2:30p	3/28	8:00a	16	3/28	8:30a	30	1/16	500
2	41	"	"	"	"	"	"	"	"	"	"	5/16	97
3	37	"	"	"	"	"	"	"	"	"	"	7/16	168
4	30	"	"	"	"	"	"	"	"	"	"	3/16	158
5	27	"	"	"	"	"	"	"	"	"	"	1/16	500
6	33	"	"	"	"	"	"	"	"	"	"	1/8	231

Person Conducting Percolation Tests

Name: Terri Jakoubek, Raymond Contracting, Inc.

Phone: 402-783-2663 or 402-890-3870

Address 13800 NW 70th St

Raymond, NE 68428 #C1198

Sum of Percolation Rates: 1554

Average of Rates: 259

Rate Used for Calculation: failed

DO NOT WRITE BELOW THIS LINE

Reviewing Action

Remarks

Signature of Reviewing Official Date

FORM 23-101 10-96

SCANNED


C

Lincoln-Lancaster County Health Department
Environmental Health Division
3140 "N" Street • Lincoln, NE 68510-1514
Phone: 402-441-8022

Permit Number:

Sewage Disposal System
Preliminary Plan Specifications

Draw a plot plan showing system location, lines, distribution box, tank and laterals, percolation test hole locations, well, residence, compass direction and property lines. Indicate on drawing if residence and well are existing or proposed.

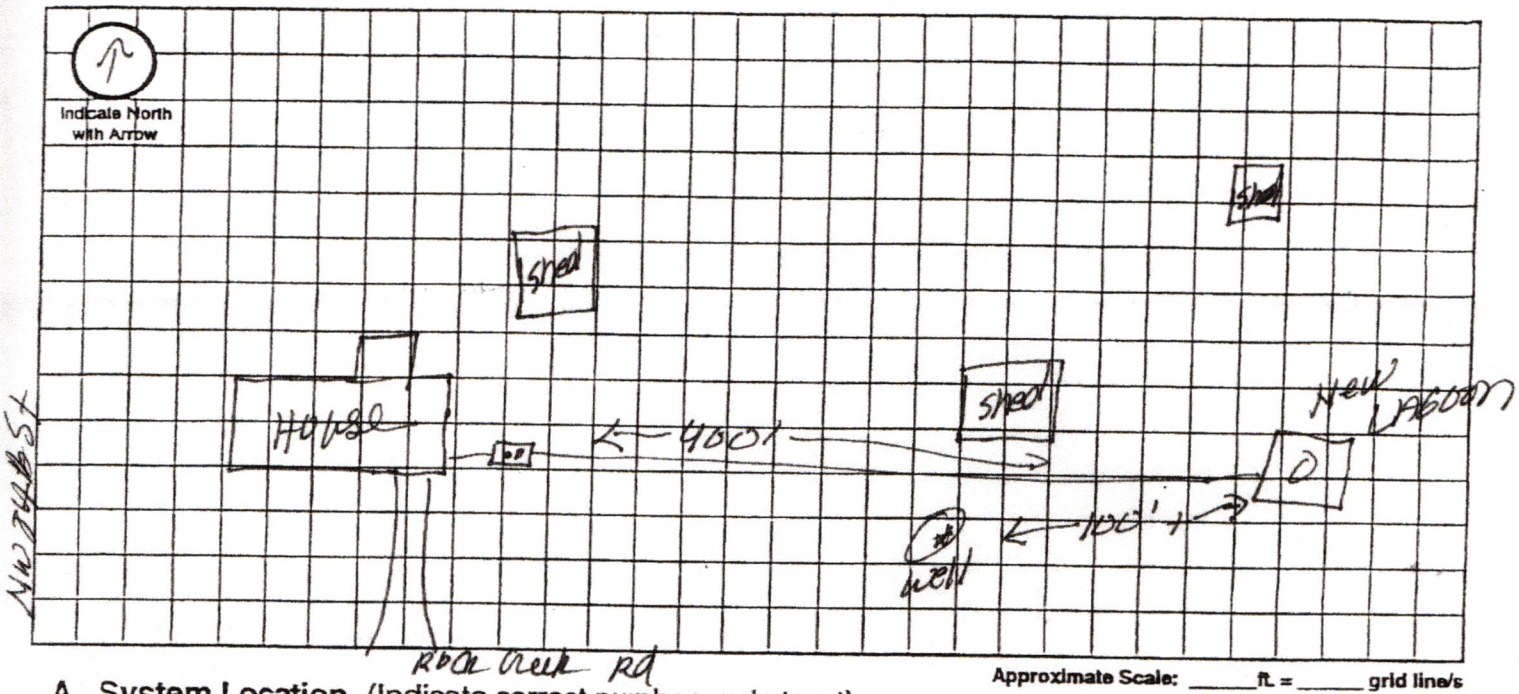

Approximate Scale: _____ ft. = _____ grid line/s

A. System Location (Indicate correct number and street)

Address (no rural route) 8354 W Rock Creek Rd City Raymond NE, Zip 68428

B. Proposed Septic Tank/s

Tank Material: ☐ Concrete ☐ Plastic ☐ Other _____

C. Proposed Absorption System (See Form B for Percolation Information)

Percolation Rate _____ (min. per inch) Soil Type: _____ Land Slope: _____ %

Type of Absorption System: ☐ Trench ☐ Bed ☐ Other _____

Total Square Feet of Field Required: _____ sq. ft.

Type of Lateral: ☐ Half-Moon ☐ Perforated Pipe ☐ Other Lateral Material: _____

Capacity of Septic Tank _____ gals Number of Absorption Beds: _____ Number of Distribution Laterals per Bed _____

Total Length of Laterals _____ ft. Number of Trenches _____ Trench Width _____

D. Setbacks Check the Boxes Below if the Required Setback has been Satisfied

Distance From	Private Well	Public Well	Surface Water	Gound Water	Pressure Water Lines	Property Lines	Foundations Yours	Foundations Neighbors	All Other Setbacks
Tank (ft)	50 ☐	500 ☐	50 ☐	NA ☐	25 ☐	20 ☐	15 ☐	25 ☐	☐
Field (ft)	100 ☐	500 ☐	50 ☐	4 ☐	30 ☐	20 ☐	30 ☐	40 ☐	☐
Lagoon (ft)	100 ☒	500 ☒	50 ☒	N/A ☐	30 ☒	50 ☒	100 ☒	200 ☒	☒

E. Required Signatures

Home Building Contractor owner [redacted] Kathy Mosiman Date 4/25/2013

Installer Kevin L. Johnson Date 4-19-13

FORM 23-102 10-96

JUN 10 2013

Lincoln-Lancaster County Health Department
Environmental Public Health Division
3140 "N" Street • Lincoln, NE 68510-1514
Phone: 402-441-8022

D

Permit Number: 1H5000748

Onsite Wastewater Treatment System

As Built Plans & Specifications

Date Jun 7, 2013 Legal Description SW 1/4 1/4 14-12-5 Lot 21 Section Township Range

Onsite System Location

Address (no rural route) 8354 w Rock Creek Rd City Raymond NE, Zip 68428

Owner Jim & Kathy Morris Address Same

A. Sewer Pipe

1. Material: SDR 26
   Diameter: 4" in.
2. Distance above basement floor: _____ in.
   or distance below basement floor: _____ in.
3. Distance between dwelling and ~~septic tank~~ Lagoon: 450+ ft.
4. Number of clean-outs: 6
5. Distances to: well or suction line 30+ ft.
   stream 100+ ft.
   pressure line 100+ ft.
   property line 100+ ft.

B. Septic Tank

☐ Label with Manufacturer, address and gallon capacity

1. Material: _____
   Number of compartments: _____
2. Capacity: _____ gal.
3. Factory built: ☐ Yes ☐ No
4. Manholes: Over inlet, diameter _____ in.
   Over outlet, diameter _____ in.
   Riser: ☐ above ☐ below grade _____ in.
5. Inlet: ☐ baffle ☐ tee ☐ 6" dia. inspection pipe
6. Outlet: ☐ baffle ☐ tee ☐ 6" dia. inspection pipe
7. Depth to top of tank, below unfinished grade: _____ in.
8. Distances to: Well or suction line _____ ft.
   Stream _____ ft.
   Pressure line _____ ft.
   Property line _____ ft.

C. ☐ Distribution Box ☐ Drop Boxes

(≥ 12" inspection opening) (removable lid to inspect)

1. Material: _____
   Number available outlets: _____
2. Factory built: ☐ Yes ☐ No
3. Distance from septic tank: _____ ft.

D. Drainfield Absorption


☐ Trench ☐ Bed ☐ Level Bottom


1. Type: ☐ Half rounds ☐ Perforated pipe ☐ Chambers
   Diameter or width: _____
   Number of distribution lines in bed _____
   Material: ☐ fiberglass ☐ plastic ☐ concrete
   ☐ other _____
2. Drainfield Laterals: Number _____
   Length of each line: _____ ft. _____ ft.
   _____ ft. _____ ft., _____ ft.
3. Drainfield dimensions: Width _____ ft.
   Distribution Pipe Slope _____ in/100 ft.
   Average depth _____ in
4. Filter material: _____
   Depth of material _____ in.
5. Distances to: Well or suction line _____ ft.
   Pressure line _____ ft.
   Property line _____ ft.
   House or building _____ ft.
   Lake or Stream _____ ft.

Complete As-Built drawing on the back fo this form.

Indicate North with Arrow

Onsite Wastewater System Design (Example)

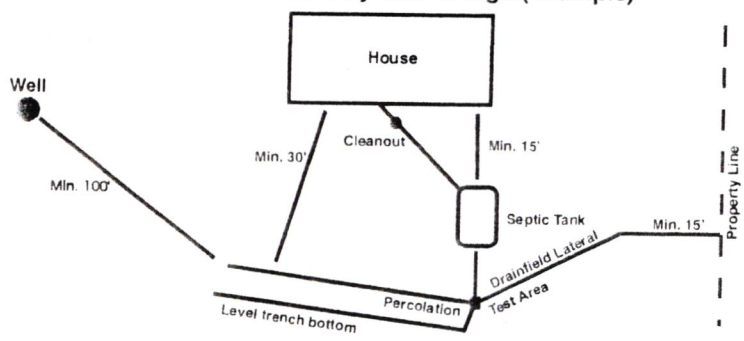

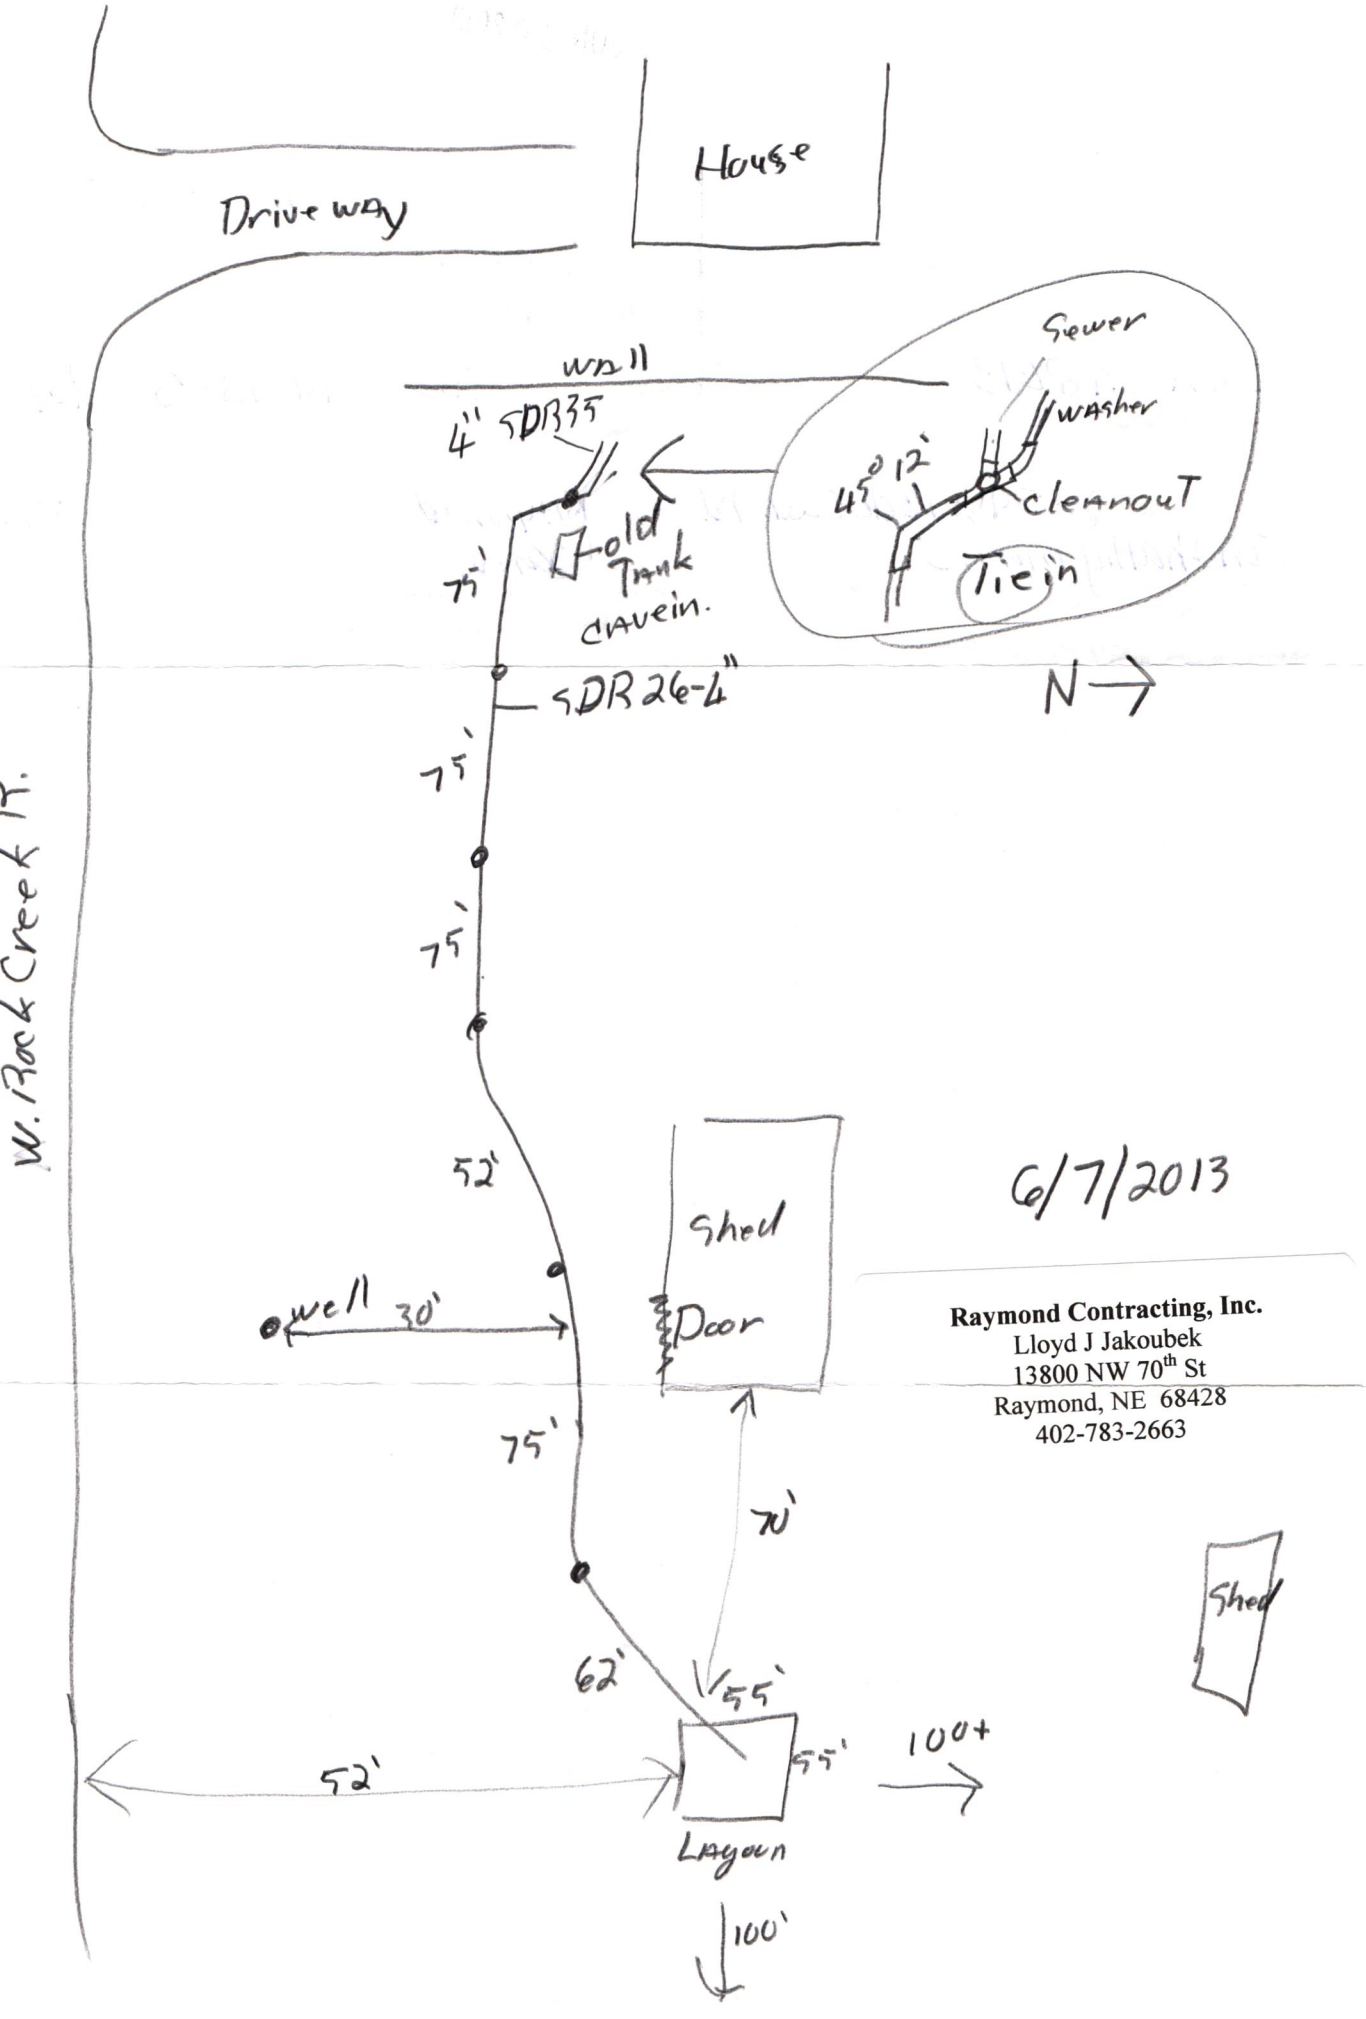
House
Driveway
Sewer
wall
washer
4" SDR35
45°
12'
cleanout
Tie in
75'
Cold Tank
cavein.
SDR 26-4"
N
75'
75'
W. Rock Creek IR.
52'
Shed
Door
well
30'
6/7/2013
Raymond Contracting, Inc.
Lloyd J Jakoubek
13800 NW 70th St
Raymond, NE 68428
402-783-2663
75'
70'
Shed
62'
55'
55'
100+
52'
Lagoon
100'