Lincoln-Lancaster County Health Department
Environmental Public Health Division (402) 441-8027
3140 N Street Lincoln, Nebraska 68510-1514

ON-SITE WASTE WATER SYSTEM
CONSTRUCTION - INSTALLATION PERMIT
No. HS000799

System Type: Lagoon

Situs: 2640 KRAUTER PL, RURAL, NE

Issued: 8/16/2013

Expires: 8/15/2014

Description: WHITETAIL RIDGE ADDITION, Lot 9

Owner: WASSER, JASON B & JENNIFER L
8850 TRUCHARD RD
LINCOLN, NE 68526

Judith A Halstead
Judith A. Halstead, MS, Health Director

Dear Applicant:

The above document is your permit to construct a new On-site Waste Water System at the location listed. Please contact this office once the sytem is complete in order to schedule a final inspection before use.

Judith A Halstead
Judith A. Halstead, MS
Health Director

ALL PRO PLUMBING
405 WASHINGTON ST
DOUGLAS, NE 68344

$355

Lincoln-Lancaster County Health Department (LLCHD)
Environmental Public Health Division
3140 "N" Street • Lincoln, NE 68510-1514
Phone: 402-441-8022

B

Permit Number:

Onsite Wastewater Treatment System
Soil Evaluation Report

PLEASE PRINT OR TYPE

Onsite System Location

Address 2640 Krauter Place (no rural route) City ~~Ashland~~ Roca NE, Zip 68430

Owner Jason Wasser Address 8850 Truchard Rd Lincoln, NE 68526

Date of Tests 5/22/13 to 5/23/13 Weather: Precipitation 0 Temperature 65°

Percolation Test Data Table

A.	B.	C. D. E. F. Saturation/Swelling Time				G. H. I. J. K. Water Level Drop Last 30 mins of 4 hr or last 10 mins of 1 hr					L. M. N. Results		
		Start		End		Start			End				
Hole No.	Hole Depth (in)	Date (Mo/Da)	Time (Hr/Min)	Date (Mo/Da)	Time (Hr/Min)	Date (Mo/Da)	Time (Hr/Min)	Initial Water Lev (in.)	Date (Mo/Da)	Time (Hr/Min)	Elapsed Time Interval	Water Level Drop (in)	Percolation Rates (Min/in = mpi)
1	42"	5/22	2:40	5/23	3:40	5/23	3:40	6	5/23	7:40	30min	1.75	17
2	42"	5/22	2:40	5/23	3:40	5/23	3:40	6	5/23	7:40	30min	2.5	12
3	42"	5/22	2:40	5/23	3:40	5/23	3:40	6	5/23	7:40	30min	3.5	9
								6					
								6					
								6					
								6					
								6					

Person Conducting Percolation Test

Name: Scott Weathersby
Phone: 402-310-9048
Address 405 Washington St

Soil type (NRCS Maps/Other) Silty Clay
Groundwater Depth n/a

Sum of Percolation Rates: 38
Average of Rates: 12.66
Rate Used for Calculation: 12.66

DO NOT WRITE BELOW THIS LINE

Reviewing Action

Comments (Soil type, groundwater, floodplain, etc.)


Signature of Reviewing Official _____ Date _____

READ THOROUGHLY


DIAGRAM OF PERCOLATION TEST PROCEDURE

Finished Grade or Natural Ground Level

I. Size, Number, and Location or Test Holes
   - A. Dig six or more holes spaced uniformly over proposed lateral field site.
   - B. Scratch smeared spots on sides of hole.
   - C. Remove loose material from hole.
   - D. Add 2" of gravel to hole.

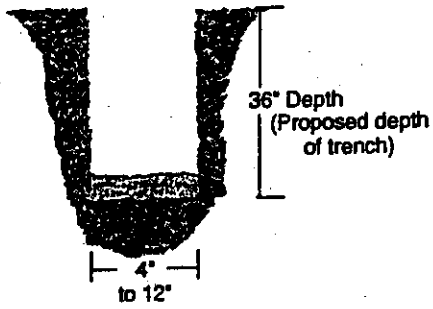


II. Saturation of Soil (Pre-soak)
   - A. Fill hole with 12" or more of water.
   - B. MAINTAIN THIS WATER LEVEL FOR 4 HOURS.
   - C. Record on Form B columns a thru f.

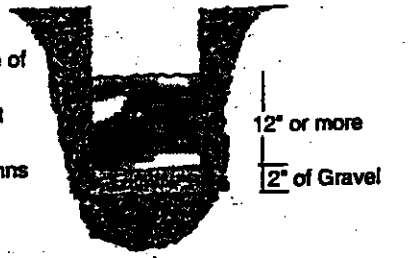


24 Hours Later

III. Percolation-rate Measurement **(refer to instructions 5a, 5b, or 5c.)**
   - A. Add 6" of water.
   - B. Measure from fixed reference point (nail) to water.
   - C. Record measurement and time on front of Form B.

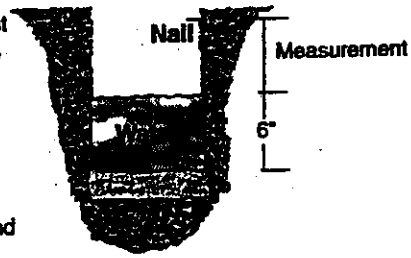

½ hour later
(30 minutes)

   - D. 30 minutes later remeasure and record time.
   - E. If water will be too low for another reading 30 minutes later, adjust to 6" of water and remeasure and record time.

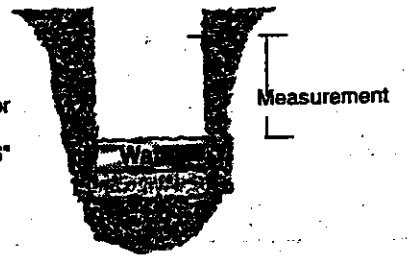

   - F. Continue for 3½ hours taking readings every 30 minutes.
   - G. Last 30 minute reading is used in filling out Form B. Record date, time, intervals and water level drops in column g thru m.

Instructions

1. **Number and location of tests.** Percolation tests shall be made in 6 or more separate test holes which shall be spaced uniformly over the proposed lateral field site.
2. **Type of test hole.** Dig or bore a hole 3 feet deep with a diameter of 4 to 12 inches. (To save time, labor and the volume of water required per test, a 4-inch auger hole is recommended).
3. **Preparation of the test hole.** Scratch or roughen any smeared spots on the sides of the hole with a knife blade or sharp pointed instrument to provide a natural soil interface into which water may percolate. Remove all loose material from the hole. Add 2 inches of gravel to protect the bottom from scouring when water is poured into the hole.
4. **Saturation and swelling of the soil.** Fill the hole with clear water to a depth of 12 inches or more above the gravel and maintain this water level at least 4 hours and preferably overnight. The accuracy and true value of the percolation data depends on thorough saturation and swelling of the soil.
5. **Percolation-rate measurement.** Percolation-rate measurements shall be made 24 hours after starting the saturation and swelling procedure described above. Record results on the front of this form and complete all calculations.
   a. If water remains in the test hole after the overnight swelling period, adjust the depth to approximately 6 inches over the gravel. From a fixed reference point, measure the drop in water level over a 30 minute period to the nearest 1/8 of an inch. This drop is used to calculate the percolation rate.
   b. If no water remains in the test hole after the overnight swelling period, add clear water to bring the depth to approximately 6 inches over the gravel. From a fixed point, measure the drop in water level to the nearest 1/8 of an inch at 30-minute intervals for 4 hours. Refill to the 6 inch level over the gravel as often as necessary. The drop that occurs during the final 30 minutes is used to calculate the percolation rate.
   c. In sandy soils (or other soils in which the first 6 inches of water seeps away in less than 30 minutes after the overnight swelling period) the time interval between measurements shall be 10 minutes instead of 30 minutes and the test run for 1 hour instead of 4 hours. The drop that occurs during the final 10 minutes is used to calculate the percolation rate.
6. **Record the test results and complete all calculations on the front of this form.** The average of the percolation rates calculated for all holes in the last 30 (10) minutes will normally be the rate used for calculations to size the system. ***Exceptions are the use of the greatest percolation rate when rates vary more than 20 min/in between holes or when other soil analysis indicates potential percolation problems.***

LLCHD reserves the right to require additional testing based on knowledge of soil types, percolation tests results on nearby properties, or due to concerns with procedures followed. In some situations, LLCHD staff will require and perform on-site observation of percolation tests.

Nate C. Hartman

From: Ken D. Schroeder
Sent: Thursday, August 15, 2013 9:21 AM
To: Nate C. Hartman
Subject: sewage disposal system for 2640 Krauter place
Attachments: part of sec 19-8-7.pdf


Nate,
Lancaster County Engineering Department indicates approval for a sewage disposal system for lot 9, "WHITETAIL RIDGE ADDITION" located in Section 19, T8N, R7E of the 6th P.M., Lancaster County, Nebraska. *(see attached part of sec.19-8-7)*
As always, subject to confirmation of and compliance with any floodplain elevation requirements prior to construction.
Ken

Kenneth D. Schroeder, RLS
Lancaster County Surveyor
444 Cherrycreek Road, Bldg. "C"
Lincoln, Nebraska 68528
kschroeder@lancaster.ne.gov
Phone (402) 441-7681
Fax (402) 441-8692

Nate C. Hartman

From: Shawn M. Johnson
Sent: Thursday, August 15, 2013 8:21 AM
To: Nate C. Hartman
Attachments: Shawn Johnson.vcf

2640 KAUTER LOT 9 WHITETAIL RIDGE APPROVED FOR SEPTIC

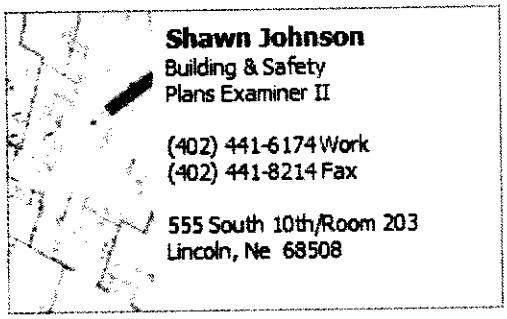

Shawn Johnson
Building & Safety
Plans Examiner II

(402) 441-6174 Work
(402) 441-8214 Fax

555 South 10th/Room 203
Lincoln, Ne 68508