Lincoln-Lancaster County Health Department
Environmental Public Health Division
3140 N Street • Lincoln NE 68510-1514
Phone: 402-441-8643

JUL 10 2014

A

Permit Number
HS000928

Onsite Wastewater Treatment System
Request for Site Clearance and Permit

Include Form B and C. Submit correct fee with this Application

3 acres or more required for: ☒ Septic System ☐ Lagoon ☐ Other (Refer to Form C)

The undersigned hereby requests site clearance and permit to construct a Wastewater Treatment System in conformance with appropriate regulations.

PLEASE PRINT OR TYPE

A. Onsite System Location

Address 3300 W Davey Rd (no rural route) City Raymond, NE Zip 68428

Legal Description SE 20 12 6 32
1/4 1/4 Section Township Range Subdivison Addition Block Lot

PID 13-20-460-011-000

B. Owner

Name Robert Nickos Signature Robert Nickos

Address 1918 Teal Cir City/State/Zip Lincoln, NE 68510

Home Phone 402-208-9404 Work Phone

C. Certified Installer

Name: Lloyd Jahnbek, Raymond Contracting Signature Ronald Jahnbek for Lloyd

Address 12800 NW 70th St City/State/Zip Raymond, NE

Work Phone 402-796-4009

D. Engineer ☐ Check and complete if engineer designed system P.E. License Number:

Designer Name Firm Work Phone

E. This system will serve a

Residential Dwelling Number of Bedrooms Whirlpool Bathtub? ☐ Yes ☐ No Total Acres 27.01
Garbage Grinder? ☐ Yes ☐ No

☒ Commercial Establishment/Other Facility Specify Shed w/bathroom Design flow in gallons per day 200

Type of Wastewater ☐ Domestic ☐ Non-Domestic

DO NOT WRITE BELOW THIS LINE

Approval Process ☐ Municipal Code 24.38 ☐ County Resolution No. 02-30

1. Health Department
Site visits
Comments
Date rec'd
Date frwd
ACTION ☐ Approved ☐ Disapproved
Signature

2. Supt. Bldg. Insp. or Village Clerk
Comments
Date rec'd
Date frwd
ACTION ☐ Approved ☐ Disapproved
Signature

3. City or County Engineer
Comments
Date rec'd
Date frwd
ACTION ☐ Approved ☐ Disapproved
Signature

Installation Final Written Approval
By
Date

Business Office Use Only
Date Received 7-10-14 Amount Paid 365.00
Received By SB Cash/Check No. 8419

White - Health Department Yellow - Engineer Pink - Building & Safety

Lincoln-Lancaster County Health Department (LLCHD)
Environmental Public Health Division
3140 "N" Street • Lincoln, NE 68510-1514
Phone: 402-441-8022

B

Permit Number: HS000928

Onsite Wastewater Treatment System
Soil Evaluation Report

PLEASE PRINT OR TYPE

Onsite System Location

Address 3300 W Davey Rd (no rural route) City Raymond NE, Zip 68428

Owner Robert Nickos Address 1918 Teal Cir Lincoln, NE 68506

Date of Tests 6/20/14 to 6/21/14 Weather: Precipitation 1" - 2" overnight Temperature 88°

Percolation Test Data Table

A.	B.	C. D. E. F. Saturation/Swelling Time				G. H. I. J. K. Water Level Drop Last 30 mins of 4 hr or last 10 mins of 1 hr					L. M. N. Results		
		Start		End		Start		Initial	End				
Hole No.	Hole Depth (in)	Date (Mo/Da)	Time (Hr/Min)	Date (Mo/Da)	Time (Hr/Min)	Date (Mo/Da)	Time (Hr/Min)	Water Lev (in.)	Date (Mo/Da)	Time (Hr/Min)	Elapsed Time Interval	Water Level Drop (in)	Percolation Rates (Min/in = mpi)
1	34	6/20	3:00p	6/20	7:00p	6/21	3:00p	6	6/21	3:30p	30	7/8	34
2	30	"	"	"	"	"	"	6	"	"	"	4	8
3	37	"	"	"	"	"	"	6	"	"	"	1 1/16	28
								6					
								6					
								6					
								6					
								6					

Person Conducting Percolation Test

Name: Terri Jakoubek CI197

Phone: 402-783-2606 3

Address 13800 NW 70th St
Raymond NE 68428

Soil type (NRCS Maps/Other) Malcolm silt loam

Groundwater Depth 76.7'

Sum of Percolation Rates: 70

Average of Rates: 23

Rate Used for Calculation: 34 (20 mpi variance)

DO NOT WRITE BELOW THIS LINE

Reviewing Action

Comments (Soil type, groundwater, floodplain, etc.) _____


Signature of Reviewing Official _____ Date _____

READ THOROUGHLY


DIAGRAM OF PERCOLATION TEST PROCEDURE

Finished Grade or Natural Ground Level

I. Size, Number, and Location or Test Holes
   - A. Dig six or more holes spaced uniformly over proposed lateral field site.
   - B. Scratch smeared spots on sides of hole.
   - C. Remove loose material from hole.
   - D. Add 2" of gravel to hole.

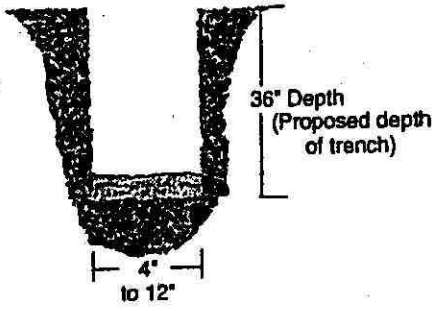


II. Saturation of Soil (Pre-soak)
   - A. Fill hole with 12" or more of water.
   - B. MAINTAIN THIS WATER LEVEL FOR 4 HOURS.
   - C. Record on Form B columns a thru f.

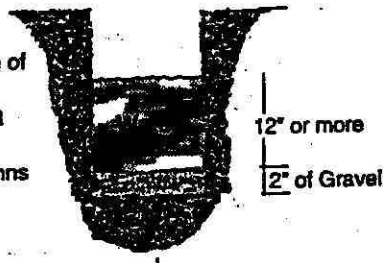


24 Hours Later

III. Percolation-rate Measurement **(refer to instructions 5a, 5b, or 5c.)**
   - A. Add 6" of water.
   - B. Measure from fixed reference point (nail) to water.
   - C. Record measurement and time on front of Form B.

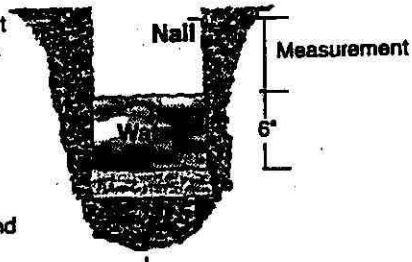

½ hour later (30 minutes)

   - D. 30 minutes later remeasure and record time.
   - E. If water will be too low for another reading 30 minutes later, adjust to 6" of water and remeasure and record time.

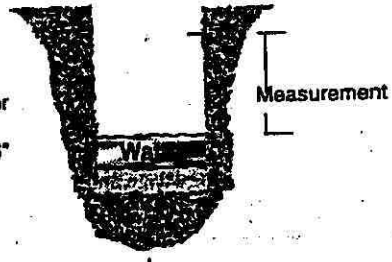

   - F. Continue for 3½ hours taking readings every 30 minutes.
   - G. Last 30 minute reading is used in filling out Form B. Record date, time, intervals and water level drops in column g thru m.

Instructions

1. **Number and location of tests.** Percolation tests shall be made in 6 or more separate test holes which shall be spaced uniformly over the proposed lateral field site.
2. **Type of test hole.** Dig or bore a hole 3 feet deep with a diameter of 4 to 12 inches. (To save time, labor and the volume of water required per test, a 4-inch auger hole is recommended).
3. **Preparation of the test hole.** Scratch or roughen any smeared spots on the sides of the hole with a knife blade or sharp pointed instrument to provide a natural soil interface into which water may percolate. Remove all loose material from the hole. Add 2 inches of gravel to protect the bottom from scouring when water is poured into the hole.
4. **Saturation and swelling of the soil.** Fill the hole with clear water to a depth of 12 inches or more above the gravel and maintain this water level at least 4 hours and preferably overnight. The accuracy and true value of the percolation data depends on thorough saturation and swelling of the soil.
5. **Percolation-rate measurement.** Percolation-rate measurements shall be made 24 hours after starting the saturation and swelling procedure described above. Record results on the front of this form and complete all calculations.
   a. If water remains in the test hole after the overnight swelling period, adjust the depth to approximately 6 inches over the gravel. From a fixed reference point, measure the drop in water level over a 30 minute period to the nearest 1/8 of an inch. This drop is used to calculate the percolation rate.
   b. If no water remains in the test hole after the overnight swelling period, add clear water to bring the depth to approximately 6 inches over the gravel. From a fixed point, measure the drop in water level to the nearest 1/8 of an inch at 30-minute intervals for 4 hours. Refill to the 6 inch level over the gravel as often as necessary. The drop that occurs during the final 30 minutes is used to calculate the percolation rate.
   c. In sandy soils (or other soils in which the first 6 inches of water seeps away in less than 30 minutes after the overnight swelling period) the time interval between measurements shall be 10 minutes instead of 30 minutes and the test run for 1 hour instead of 4 hours. The drop that occurs during the final 10 minutes is used to calculate the percolation rate.
6. **Record the test results and complete all calculations on the front of this form.** The average of the percolation rates calculated for all holes in the last 30 (10) minutes will normally be the rate used for calculations to size the system. ***Exceptions are the use of the greatest percolation rate when rates vary more than 20 min/in between holes or when other soil analysis indicates potential percolation problems.***

LLCHD reserves the right to require additional testing based on knowledge of soil types, percolation tests results on nearby properties, or due to concerns with procedures followed. In some situations, LLCHD staff will require and perform on-site observation of percolation tests.

Lincoln-Lancaster County Health Department
Environmental Public Health Division
3140 "N" Street • Lincoln, NE 68510-1514
Phone: 402-441-8022


C

Permit Number: HS060928

Onsite Wastewater Treatment System

Preliminary Plan Specifications

Draw a plot plan showing onsite system sewer lines, drop of distribution boxes, tank, drainfields, percolation test holes, well, residence, direction of groundwater flow, property lines, and reserve area for replacement onsite system.

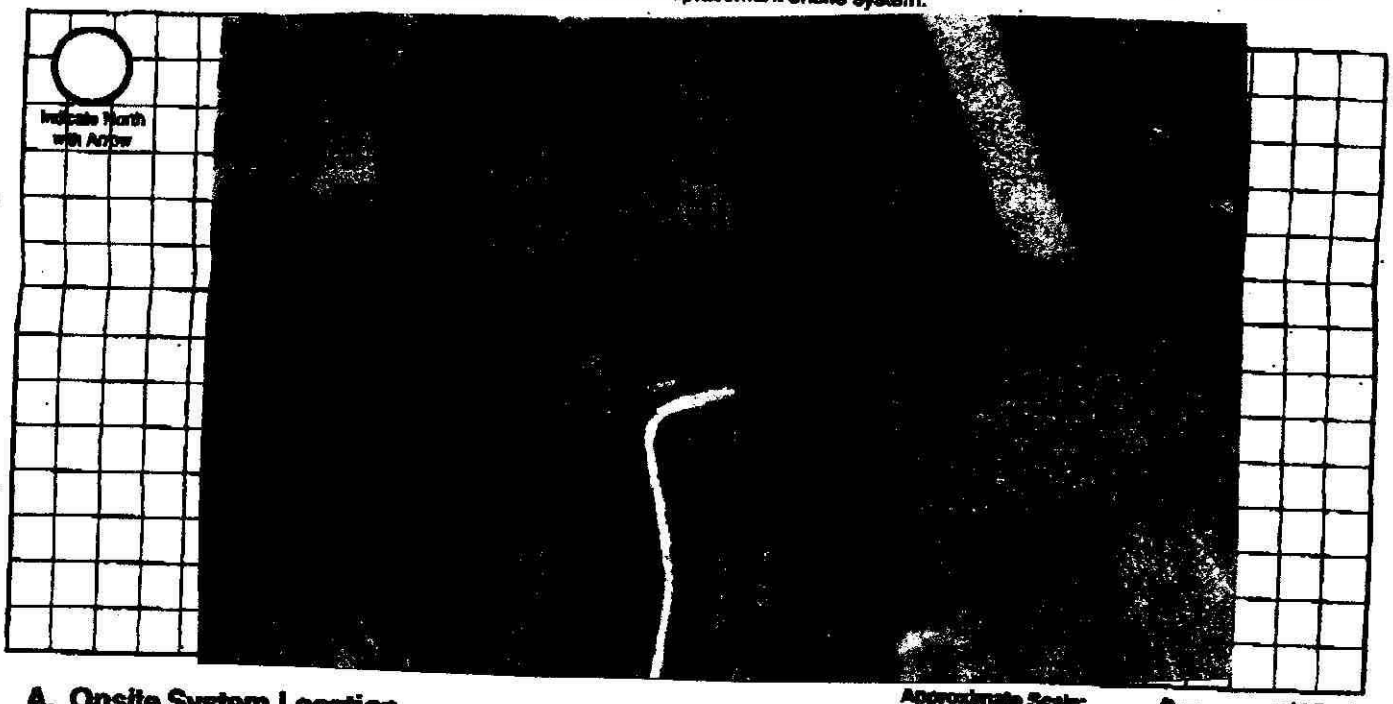

Approximate Scale: _____ ft. = _____ grid lines

A. Onsite System Location

Address (no rural route) 3320 W Davey Rd City Raymond NE, Zip 68428

B. Proposed Septic Tank/s

Septic Tank Cap. 1,000 gals Tank Material: ☒ Concrete ☐ Plastic ☐ Other _____ ☐ Lagoon(max. seepage 1/8" per day)

C. Reserve Area for Replacement Onsite System

☐ Drainfield Absorption Area (percolation test required) ☐ Lagoon

D. Drainfield Absorption System

Percolation Rate 34 (min/inch = mpi) No. of Bedrooms 1 Soil Type Silt loam Land Slope 11-25 %

☒ Trench ☐ Bed ☐ Non-Standard (engineer designed and NDEQ approved Total Square feet of drainfield 275 sq.ft.

Total length of laterals 70 Type of distribution: ☐ Perforated pipe ☐ Half-Round ☒ Chamber ☐ Other

No. of absorption trenches 1 Width 40" No. of drop boxes 1 Distribution Box _____

No. of absorption beds _____ Width _____ No of Distribution lines per bed _____

E. Setbacks Check the Boxes Below if the Required Setback has been Satisfied

Distance From	Private Well	Public Well	Surface Water	Ground Water	Pressure Water Lines	Property Lines	Foundations Yours	Foundations Neighbors	All Other Setbacks
Tank (ft)	50 ☒	500 ☒	50 ☒	NA ☐	25 ☒	20 ☒	15 ☒	25 ☒	☒
Field (ft)	100 ☒	500 ☒	50 ☒	4 ☒	30 ☒	20 ☒	30 ☒	40 ☒	☒
Lagoon (ft)	100 ☐	500 ☐	50 ☐	N/A ☐	30 ☐	50 ☐	100 ☐	200 ☐	☐

F. Required Signatures

Home Building Contractor Robert Rucka Date 07-08-2014

Installer Kevin Hollenbeck Date 7/9/2014

Lincoln-Lancaster County Health Department
Environmental Public Health Division (402) 441-8027
3140 N Street Lincoln, Nebraska 68510-1514

ON-SITE WASTE WATER SYSTEM
CONSTRUCTION - INSTALLATION PERMIT
No. HS000928

System Type: Standard

Situs: 3320 W DAVEY RD., RURAL, NE

Issued: 7/14/2014

Expires: 7/14/2015

Description: S20, T12, R6, 6th Principal Meridian, LOT 32 SE

Owner: KODAD, ELAINE C & NICKOS,
ROBERT W
1918 TEAL CIR
LINCOLN, NE 68506

Judith A Halstead
Judith A. Halstead, MS, Health Director

Dear Applicant:

The above document is your permit to construct a new On-site Waste Water System at the location listed. Please contact this office once the sytem is complete in order to schedule a final inspection before use.

Judith A Halstead
Judith A. Halstead, MS
Health Director

RAYMOND CONTRACTING
13800 NW 70TH ST
RAYMOND, NE 68428

JUL 28 2014

D

Lincoln-Lancaster County Health Department
Environmental Public Health Division
3140 "N" Street • Lincoln, NE 68510-1514
Phone: 402-441-8022

Permit Number: HS000928

Onsite Wastewater Treatment System

As Built Plans & Specifications

Date 7/22/2014 Legal Description SE 1/4 20 1/4 - 12N Section - 6E Township Range

Onsite System Location

Address (no rural route) 3360 W Davey Rd City Raymond NE, Zip 68428

Owner Robert Nickas Address 518 Teal Cir Lincoln, NE 68506

A. Sewer Pipe

1. Material: SDR 26
   Diameter: 4 in.
2. Distance above basement floor: _____ in.
   or distance below [redacted] floor: 30 in.
3. Distance between dwelling and septic tank: 102 ft.
4. Number of clean-outs: 2
5. Distances to: well or suction line 100 ft.
   stream 100 ft.
   pressure line 100 ft.
   property line 25 ft.

B. Septic Tank

☑ Label with Manufacturer, address and gallon capacity

1. Material: Concrete
   Number of compartments: one
2. Capacity: 1000 gal.
3. Factory built: ☑ Yes ☐ No
4. Manholes: Over inlet, diameter 24 in.
   Over outlet, diameter 24 in.
   Riser: ☐ above ☐ below grade AT in.
5. Inlet: ☐ baffle ☐ tee ☐ 6" dia. inspection pipe
6. Outlet: ☐ baffle ☐ tee ☐ 6" dia. inspection pipe
7. Depth to top of tank, below unfinished grade: 12 in.
8. Distances to: Well or suction line 100 ft.
   Stream 100 ft.
   Pressure line 100 ft.
   Property line 10' ft.

C. ☐ Distribution Box ☑ Drop Boxes

(≥ 12" inspection opening) (removable lid to inspect)

1. Material: PLASTIC 1 - Endcap
   Number available outlets: 2
2. Factory built: ☑ Yes ☐ No
3. Distance from septic tank: 9' ft.

D. Drainfield Absorption


☑ Trench ☐ Bed ☐ Level Bottom


1. Type: ☐ Half rounds ☐ Perforated pipe ☐ Chambers
   Diameter or width: _____
   Number of distribution lines in bed _____
   Material: ☐ fiberglass ☑ plastic ☐ concrete
   ☐ other _____
2. Drainfield Laterals: Number 1
   Length of each line: 70' ft. _____ ft.
   _____ ft. _____ ft., _____ ft.
3. Drainfield dimensions: Width 40 ft.
   Distribution Pipe Slope Flat in/100 ft.
   Average depth 28-40 in
4. Filter material: Soil
   Depth of material 28-40 in.
5. Distances to: Well or suction line 100+ ft.
   Pressure line 100+ ft.
   Property line 5'+ ft.
   House or building 104 ft.
   Lake or Stream 100+ ft.

Complete As-Built drawing on the back to this form.

Onsite Wastewater System Design (Example)

Indicate North with Arrow

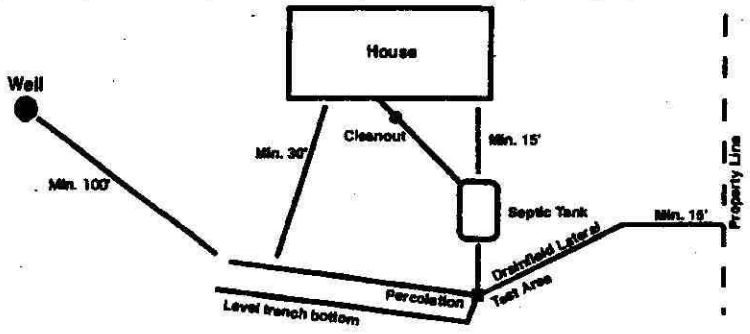

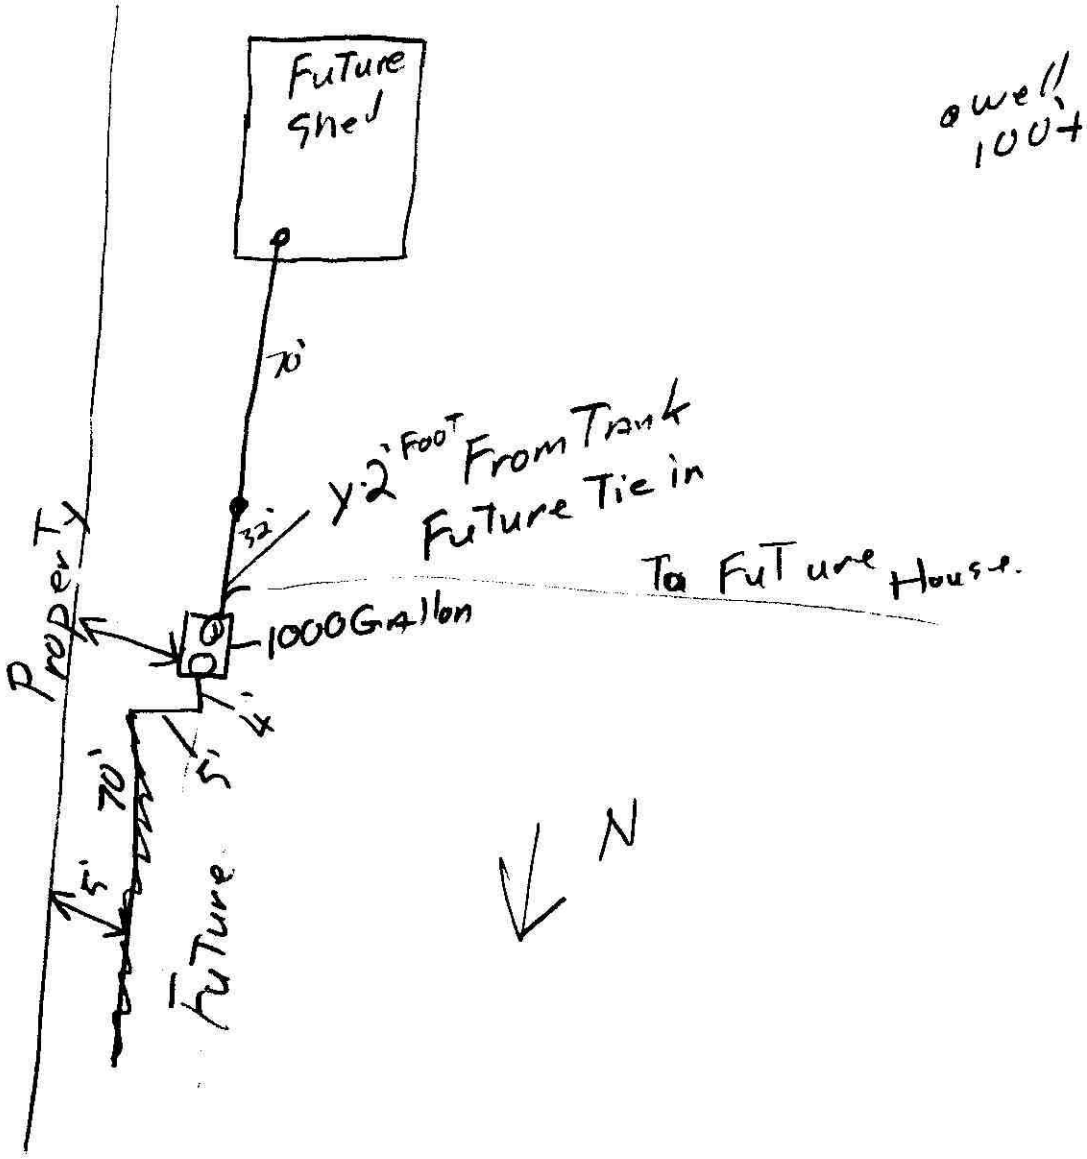

7/23/2014

Raymond Contracting, Inc.
Lloyd J Jakoubek
13800 NW 70th St
Raymond, NE 68428
402-783-2663

SCANNED

Lincoln-Lancaster County Health Department
Environmental Public Health Division
3140 N Street • Lincoln NE 68510-1514
Phone: 402-441-8643

JUL 10 2014

A

Permit Number
HS000928

Onsite Wastewater Treatment System
Request for Site Clearance and Permit

Include Form B and C. Submit correct fee with this Application

3 acres or more required for: ☒ Septic System ☐ Lagoon ☐ Other (Refer to Form C)

The undersigned hereby requests site clearance and permit to construct a Wastewater Treatment System in conformance with appropriate regulations.

PLEASE PRINT OR TYPE

A. Onsite System Location

Address 3200 w/ Davey Rd (no rural route) City Raymond, NE Zip 68428

Legal Description SE 20 12 6 32
1/4 1/4 Section Township Range Subdivison Addition Block Lot

PID 13-20-400-011-000

B. Owner

Name Robert Nickos Signature Robert Nickos

Address 1918 Teal Cir City/State/Zip Lincoln, NE 68510

Home Phone 402-208-9404 Work Phone

C. Certified Installer

Name: Lloyd Jahnbek, Raymond Contracting Signature Lloyd Jahnbek for Lloyd

Address 12800 NW 70th St City/State/Zip Raymond, NE

Work Phone 402-796-4009

D. Engineer ☐ Check and complete if engineer designed system P.E. License Number:

Designer Name Firm Work Phone

E. This system will serve a

Residential Dwelling Number of Bedrooms Whirlpool Bathtub? ☐ Yes ☐ No Total Acres 27.01
Garbage Grinder? ☐ Yes ☐ No

☒ Commercial Establishment/Other Facility Specify Shed w/bathroom Design flow in gallons per day 200

Type of Wastewater ☐ Domestic ☐ Non-Domestic

DO NOT WRITE BELOW THIS LINE

Approval Process ☐ Municipal Code 24.38 ☐ County Resolution No. 02-30

1. Health Department
Site visits
Comments
Date rec'd 7/14/14
Date frwd 7/14/14
ACTION ☐ Approved ☐ Disapproved
Signature

2. Supt. Bldg. Insp. or Village Clerk
Comments
Date rec'd
Date frwd
ACTION ☐ Approved ☒ Disapproved 7/21/14 over 20 acres
Signature

3. City or County Engineer
Comments Must Build Above Floodway & Floodplain.
Date rec'd
Date frwd
ACTION ☒ Approved ☐ Disapproved 7/11/14
Signature

Installation Final Written Approval
By Doug Rau
Date 7/2/15

Business Office Use Only
Date Received 7-10-14 Amount Paid 365.00
Received By JB Cash/Check No. 8419

White - Health Department Yellow - Engineer Pink - Building & Safety

Lincoln-Lancaster County Health Department
Environmental Public Health Division
3140 "N" Street • Lincoln, NE 68510-1514
Phone: 402-441-8022

C

Permit Number: HS000928

Onsite Wastewater Treatment System

Preliminary Plan Specifications

Draw a plot plan showing onsite system sewer lines, drop of distribution boxes, tank, drainfields, percolation test holes, well, residence, direction of groundwater flow, property lines, and reserve area for replacement onsite system.



Approximate Scale: _____ ft. = _____ grid lines

A. Onsite System Location

Address (no rural route) 3320 W Davey Rd City Raymond NE, Zip 68428

B. Proposed Septic Tank/s

Septic Tank Cap. 1,000 gals Tank Material: ☒ Concrete ☐ Plastic ☐ Other _____ ☐ Lagoon(Max. seepage 1/8" per day)

C. Reserve Area for Replacement Onsite System

☐ Drainfield Absorption Area (percolation test required) ☐ Lagoon

D. Drainfield Absorption System

Percolation Rate 34 (min/inch = mpi) No. of Bedrooms 1 Soil Type Silt Loam Land Slope 11-25 %

☒ Trench ☐ Bed ☐ Non-Standard (engineer designed and NDEQ approved Total Square feet of drainfield 275 sq.ft.

Total length of laterals 70 Type of distribution: ☐ Perforated pipe ☐ Half-Round ☒ Chamber ☐ Other

No. of absorption trenches 1 Width 40" No. of drop boxes 1 Distrubtion Box _____

No. of absorption beds _____ Width _____ No of Distribution lines per bed _____

E. Setbacks Check the Boxes Below if the Required Setback has been Satisfied

Distance From	Private Well	Public Well	Surface Water	Gound Water	Pressure Water Lines	Property Lines	Foundations Yours	Foundations Neighbors	All Other Setbacks
Tank (ft)	50 ☒	500 ☒	50 ☒	NA ☐	25 ☒	20 ☒	15 ☒	25 ☒	☒
Field (ft)	100 ☒	500 ☒	50 ☒	4 ☒	30 ☒	20 ☒	30 ☒	40 ☒	☒
Lagoon (ft)	100 ☐	500 ☐	50 ☐	N/A ☐	30 ☐	50 ☐	100 ☐	200 ☐	☐

F. Required Signatures

Home Building Contractor Robert Nichols Date 07-08-2014

Installer Kevin L. Gabrielsen Date 7/9/2014

Onsite Form C 12-06