Lincoln-Lancaster County Health Department
Environmental Public Health Division
3140 N Street • Lincoln NE 68510-1514
Phone: 402-441-8643

A

Permit Number
HSO 014169

Onsite Wastewater Treatment System
Request for Site Clearance and Permit

Include Form B and C. Submit correct fee with this Application

3 acres or more required for: ☒ Septic System ☐ Lagoon ☐ Other (Refer to Form C)

The undersigned hereby requests site clearance and permit to construct a Wastewater Treatment System in conformance with appropriate regulations.

PLEASE PRINT OR TYPE

A. Onsite System Location

Address 5222 Saltillo Rd (no rural route) City Lincoln, NE Zip

Legal Description Libel Addition 2

1/4 1/4 Section Township Range Subdivison Addition Block Lot

PID 16-32-403-002-000

B. Owner

Name Michael & Stacy L Nass Signature

Address City/State/Zip

Home Phone Work Phone

C. Certified Installer

Name: Kevin Lewis Signature

Address 4810 W Claire Ave City/State/Zip Lincoln NE 68523

Work Phone 402 310 9160

D. Engineer ☐ **Check and complete if engineer designed system** P.E. License Number:

Designer Name Firm Work Phone

E. This system will serve a

☒ Residential Dwelling Number of Bedrooms 5 Whirlpool Bathtub? ☒ Yes ☐ No Total Acres

Garbage Grinder? ☒ Yes ☐ No

☐ Commercial Establishment/Other Facility Specify Design flow in gallons per day 600

Type of Wastewater ☐ Domestic ☐ Non-Domestic

DO NOT WRITE BELOW THIS LINE

Approval Process ☐ Municipal Code 24.38 ☐ County Resolution No. 02-30

1. Health Department

Site visits Date rec'd ACTION ☐ Approved ☐ Disapproved

Date frwd Signature

Comments

2. Supt. Bldg. Insp. or Village Clerk

Comments Date rec'd ACTION ☐ Approved ☐ Disapproved

Date frwd Signature

3. City or County Engineer

Comments Date rec'd ACTION ☐ Approved ☐ Disapproved

Date frwd Signature

Installation Final Written Approval

By

Date

Business Office Use Only
Date Received 6/15/11 Amount Paid $395
Received By SB Cash/Check No. 8532

White - Health Department Yellow - Engineer Pink - Building & Safety

Form A Updated: 1/13

Lincoln-Lancaster County Health Department (LLCHD)
Environmental Public Health Division
3140 "N" Street • Lincoln, NE 68510-1514
Phone: 402-441-8022

B

Permit Number: HS0014469

Onsite Wastewater Treatment System
Soil Evaluation Report

PLEASE PRINT OR TYPE

Onsite System Location

Address 5222 Saltillo Rd (no rural route) City Lincoln NE, Zip

Owner Michael & Stacy Ness Address

Date of Tests 6-2-17 to 6-3-17 Weather: Precipitation 0 Temperature 90°

Percolation Test Data Table

A.	B.	C. D. E. F. Saturation/Swelling Time				G. H. I. J. K. Water Level Drop Last 30 mins of 4 hr or last 10 mins of 1 hr					L. M. N. Results		
		Start		End		Start		Initial	End				
Hole No.	Hole Depth (in)	Date (Mo/Da)	Time (Hr/Min)	Date (Mo/Da)	Time (Hr/Min)	Date (Mo/Da)	Time (Hr/Min)	Water Lev (in.)	Date (Mo/Da)	Time (Hr/Min)	Elapsed Time Interval	Water Level Drop (in)	Percolation Rates (Min/in = mpi)
1	36	6-2	10 AM	6-3	3:00	6-3	3:30	6	6-3	3:30	30	1	30
2								6				½	60
3								6				½	60
4								6				1	30
5								6				½	60
6								6				⅝	48
								6					
								6					

Person Conducting Percolation Test

Name: Kevin Lewis
Phone: 402 310 9160
Address 4810 W Claire Ave
Lincoln NE 68523

Sum of Percolation Rates: 288
Average of Rates: 48
Rate Used for Calculation: 60

Soil type (NRCS Maps/Other) 7684 Wymore silty clay 3-6% slope
7501 Pawnee clay loam 4-8% " "

DO NOT WRITE BELOW THIS LINE

Reviewing Action

Comments (Soil type, groundwater, floodplain, etc.)

Signature of Reviewing Official Date

Lincoln-Lancaster County Health Department
Environmental Public Health Division
3140 "N" Street • Lincoln, NE 68510-1514
Phone: 402-441-8022


C

Permit Number: HS001469

Onsite Wastewater Treatment System

Preliminary Plan Specifications

Draw a plot plan showing onsite system sewer lines, drop of distribution boxes, tank, drainfields, percolation test holes, well, residence, direction of groundwater flow, property lines, and reserve area for replacement onsite system.

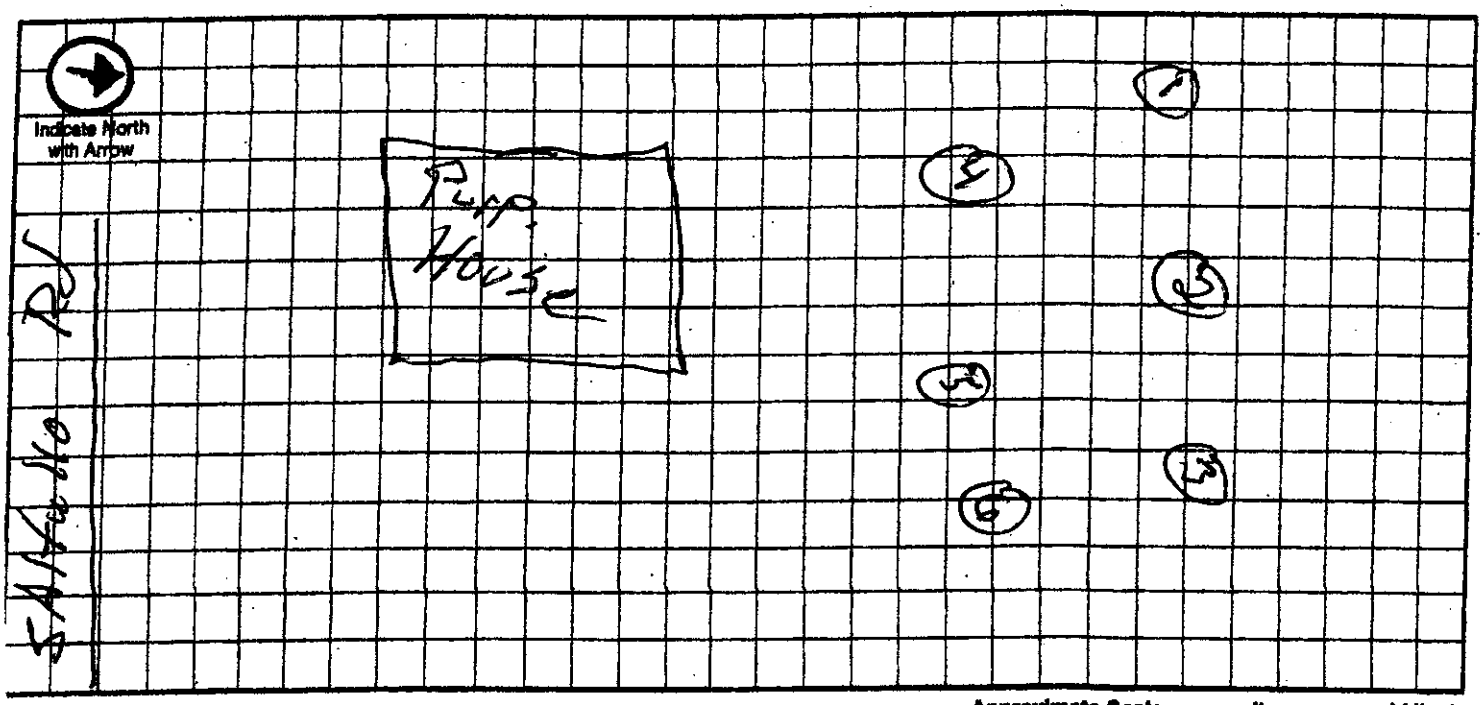

Approximate Scale: _____ft. = _____ grid line/s

A. Onsite System Location

Address (no rural route) 5222 Saltillo Rd City Lincoln NE, Zip _____

B. Proposed Septic Tank/s

Septic Tank Cap. 2000 gals Tank Material: ☐ Concrete ☒ Plastic ☐ Other_____ ☐ Lagoon(Max. seepage 1/8" per day)

C. Reserve Area for Replacement Onsite System

☐ Drainfield Absorption Area (percolation test required) ☐ Lagoon

D. Drainfield Absorption System

Percolation Rate 60 (min/inch = mpi) No. of Bedrooms 5 Soil Type 7684 & 7501 Land Slope 3-8 %

☒ Trench ☐ Bed ☐ Non-Standard (engineer designed and NDEQ approved Total Square feet of drainfield 1750 sq.ft.

Total length of laterals 483' Type of distribution: ☐ Perforated pipe ☐ Half-Round ☒ Chamber ☐ Other

No. of absorption trenches_____ Width_____ No. of drop boxes_____ Distrubtion Box_____

No. of absorption beds_____ Width_____ No of Distribution lines per bed_____

E. Setbacks Check the Boxes Below if the Required Setback has been Satisfied

Distance From	Private Well	Public Well	Surface Water	Gound Water	Pressure Water Lines	Property Lines	Foundations Yours	Foundations Neighbors	All Other Setbacks
Tank (ft)	50 ☐	500 ☐	50 ☐	NA ☐	25 ☐	20 ☐	15 ☐	25 ☐	☐
Field (ft)	100 ☐	500 ☐	50 ☐	4 ☐	30 ☐	20 ☐	30 ☐	40 ☐	☐
Lagoon (ft)	100 ☐	500 ☐	50 ☐	N/A ☐	30 ☐	50 ☐	100 ☐	200 ☐	☐

F. Required Signatures

Home Building Contractor _____ Date _____

HS001469


Michael & Staci L Nass

Soil NO GOOD

Parcel ID 16-32-403-002-000

7211 7501 Libel Addation lot 2

Pawnee Clay loam 4-8% slope

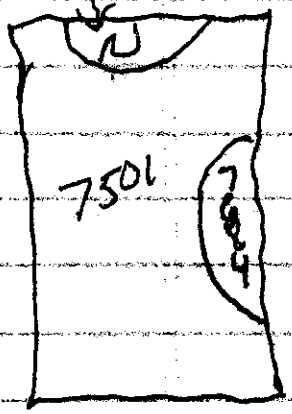

7684 = Wymore silty clay 3-6% slope

½ mile west of 54th & Saltillo

North side of Saltillo will have a wilderness Sign up soon.

Lincoln-Lancaster County Health Department
Environmental Public Health Division (402) 441-8027
3140 N Street Lincoln, Nebraska 68510-1514

ON-SITE WASTE WATER SYSTEM
CONSTRUCTION - INSTALLATION PERMIT
No. HS001469

System Type: Standard

Situs: No Site Address Specified

Description: LEIBEL ADDITION, Lot 2

Issued: 6/8/2017

Expires: 6/8/2018

Owner: NASS, MICHAEL A & STACI L
7420 HELEN WITT DR
LINCOLN, NE 68512

Charlotte Burke, MS, RD, Interim Health Director

Dear Applicant:

The above document is your permit to construct a new On-site Waste Water System at the location listed. Please contact this office once the sytem is complete in order to schedule a final inspection before use.

Charlotte Burke, MS, RD
Interim Health Director

GAGNER CONSTRUCTION COMPANY
4810 W CLAIRE AVE
LINCOLN, NE 68523