OCT 04 2017

Lincoln-Lancaster County Health Department
Environmental Public Health Division
3140 N Street • Lincoln NE 68510-1514
Phone: 402-441-8643

A

Permit Number H 5001548

Existing Home

Onsite Wastewater Treatment System
Request for Site Clearance and Permit

Include Form B and C. Submit correct fee with this Application

3 acres or more required for: ☒ Septic System ☐ Lagoon ☐ Other (Refer to Form C)

The undersigned hereby requests site clearance and permit to construct a Wastewater Treatment System in conformance with appropriate regulations.

PLEASE PRINT OR TYPE

A. Onsite System Location

Address 11400 N 14th St (no rural route) City Raymond NE Zip 68428

Legal Description SW (1/4) NW (1/4) 13 (Section) 11N (Township) 6E (Range) _____ (Subdivison) _____ (Addition) 8 (Block) _____ (Lot)

PID 12-13-100-004-000

B. Owner

Name Don Fertig for Robert Fertig ESTATE Signature Donald W. Fertig, PERSONAL REPRESENTATIVE FOR ROBERT FERTIG ESTATE

Address 1700 Davey Rd City/State/Zip Davey, NE 68336

Home Phone 402-785-2225 Work Phone _____

C. Certified Installer

Name: Lloyd Jakoubek, Raymond Contracting Inc Signature _____

Address 13800 NW 70th St City/State/Zip Raymond, NE 68428

Work Phone 402-890-6009 or 402-783-2663

D. Engineer

☐ Check and complete if engineer designed system P.E. License Number: _____

Designer Name _____ Firm _____ Work Phone _____

E. This system will serve a

☒ Residential Dwelling Number of Bedrooms 2 Whirlpool Bathtub? ☐ Yes ☒ No Total Acres 19.48

Garbage Grinder? ☐ Yes ☒ No

☐ Commercial Establishment/Other Facility Specify _____ Design flow in gallons per day _____

Type of Wastewater ☐ Domestic ☐ Non-Domestic

DO NOT WRITE BELOW THIS LINE

Approval Process ☐ Municipal Code 24.38 ☐ County Resolution No. 02-30

1. Health Department
Site visits _____ Date rec'd _____ Date frwd _____
Comments _____
ACTION ☐ Approved ☐ Disapproved Signature _____

2. Supt. Bldg. Insp. or Village Clerk
Comments _____ Date rec'd _____ Date frwd _____
ACTION ☐ Approved ☐ Disapproved Signature _____

3. City or County Engineer
Comments _____ Date rec'd _____ Date frwd _____
ACTION ☐ Approved ☐ Disapproved Signature _____

Installation Final Written Approval
By _____
Date _____

Business Office Use Only
Date Received 10/4/17 Amount Paid $405
Received By JM Cash/Check No. 9248

White - Health Department Yellow - Engineer Pink - Building & Safety

Lincoln-Lancaster County Health Department (LLCHD)
Environmental Public Health Division
3140 "N" Street • Lincoln, NE 68510-1514
Phone: 402-441-8022

B

Permit Number:

Onsite Wastewater Treatment System

Soil Evaluation Report

PLEASE PRINT OR TYPE

Onsite System Location

Address 11400 N 14th St (no rural route) City Raymond NE, Zip 68428

Owner Don Fertig for Robert Fertig Address 1700 Davey Rd, Davey, NE 68336

Date of Tests 9/22/17 to 9/23/17 Weather: Precipitation 0 Temperature 83 °

Percolation Test Data Table

A.	B.	C. D. E. F. Saturation/Swelling Time				G. H. I. J. K. Water Level Drop Last 30 mins of 4 hr or last 10 mins of 1 hr					L. M. N. Results		
		Start		End		Start		Initial	End				
Hole No.	Hole Depth (in)	Date (Mo/Da)	Time (Hr/Min)	Date (Mo/Da)	Time (Hr/Min)	Date (Mo/Da)	Time (Hr/Min)	Water Lev (in.)	Date (Mo/Da)	Time (Hr/Min)	Elapsed Time Interval	Water Level Drop (in)	Percolation Rates (Min/in = mpi)
1	28	9/22	2:30p	9/22	6:30p	9/23	11:30a	6	9/23	12:00p	30	5/8	48
2	20	"	"	"	"	"	"	6	"	"	"	1/2	60
3	24	"	"	"	"	"	"	6	"	"	"	1-3/8	22
4	25	"	"	"	"	"	"	6	"	"	"	5/8	48
								6					
								6					
								6					
								6					

Person Conducting Percolation Test

Name: Terri L Jakoubek, Raymond Contracting, Inc.

Phone: 402-783-2663 or 402-890-6009

Address 13800 NW 70th St

Raymond, NE 68428 Cert #1198

Sum of Percolation Rates: 178

Average of Rates: 45

Rate Used for Calculation: 60 (20 mpi variance)

Soil type (NRCS Maps/Other) Silt Loam

Groundwater Depth >10'

DO NOT WRITE BELOW THIS LINE

Reviewing Action

Comments (Soil type, groundwater, floodplain, etc.)

Signature of Reviewing Official Date

Lincoln-Lancaster County Health Department
Environmental Public Health Division
3140 "N" Street • Lincoln, NE 68510-1514
Phone: 402-441-8022


C

Permit Number:

Onsite Wastewater Treatment System

Preliminary Plan Specifications

Draw a plot plan showing onsite system sewer lines, drop of distribution boxes, tank, drainfields, percolation test holes, well, residence, direction of groundwater flow, property lines, and reserve area for replacement onsite system.

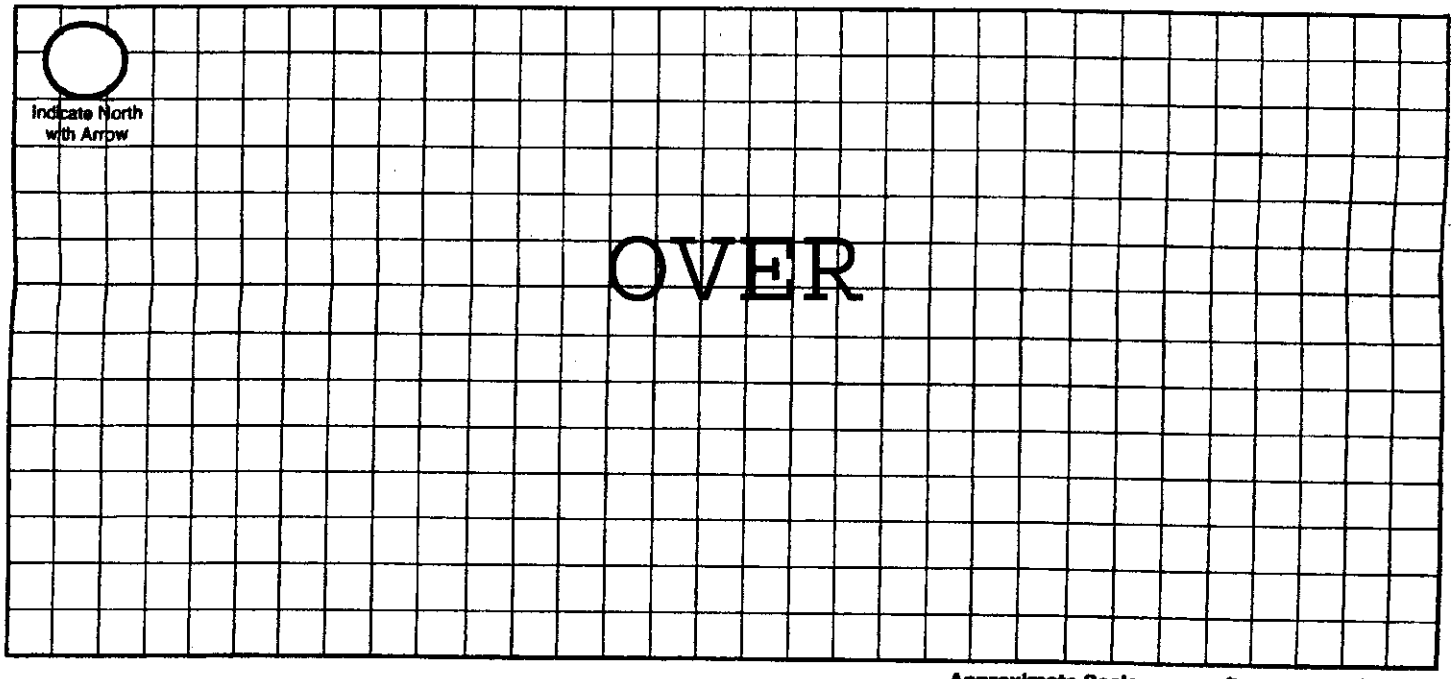

Approximate Scale: _____ ft. = _____ grid line/s

A. Onsite System Location

Address (no rural route) 11400 N 14th St City Raymond NE, Zip 68428

B. Proposed Septic Tank/s

Septic Tank Cap. 1,000 gals Tank Material: ☒ Concrete ☐ Plastic ☐ Other _____ ☐ Lagoon(Max. seepage 1/8" per day)

C. Reserve Area for Replacement Onsite System

☐ Drainfield Absorption Area (percolation test required) ☒ Lagoon

D. Drainfield Absorption System

Percolation Rate 60 (min/inch = mpi) No. of Bedrooms 2 Soil Type Silt Loam Land Slope _____ %

☒ Trench ☐ Bed ☐ Non-Standard (engineer designed and NDEQ approved Total Square feet of drainfield 720 sq.ft.

Total length of laterals 160' Type of distribution: ☐ Perforated pipe ☐ Half-Round ☐ Chamber ☒ Other EZFlow 1203H

No. of absorption trenches 2 Width 40" No. of drop boxes 1 Distrubtion Box _____

No. of absorption beds _____ Width _____ No of Distribution lines per bed _____


E. Setbacks Check the Boxes Below if the Required Setback has been Satisfied

Distance From	Private Well	Public Well	Surface Water	Gound Water	Pressure Water Lines	Property Lines	Foundations Yours	Foundations Neighbors	All Other Setbacks
Tank (ft)	50 ☒	500 ☒	50 ☒	NA ☒	25 ☒	20 ☒	15 ☒	25 ☒	☒
Field (ft)	100 ☒	500 ☒	50 ☒	4 ☒	30 ☒	20 ☒	30 ☒	40 ☒	☒
Lagoon (ft)	100 ☐	500 ☐	50 ☐	N/A ☐	30 ☐	50 ☐	100 ☐	200 ☐	☐

F. Required Signatures

Home Building Contractor Existing Home Date _____

Installer _____ Date 10/2/2017

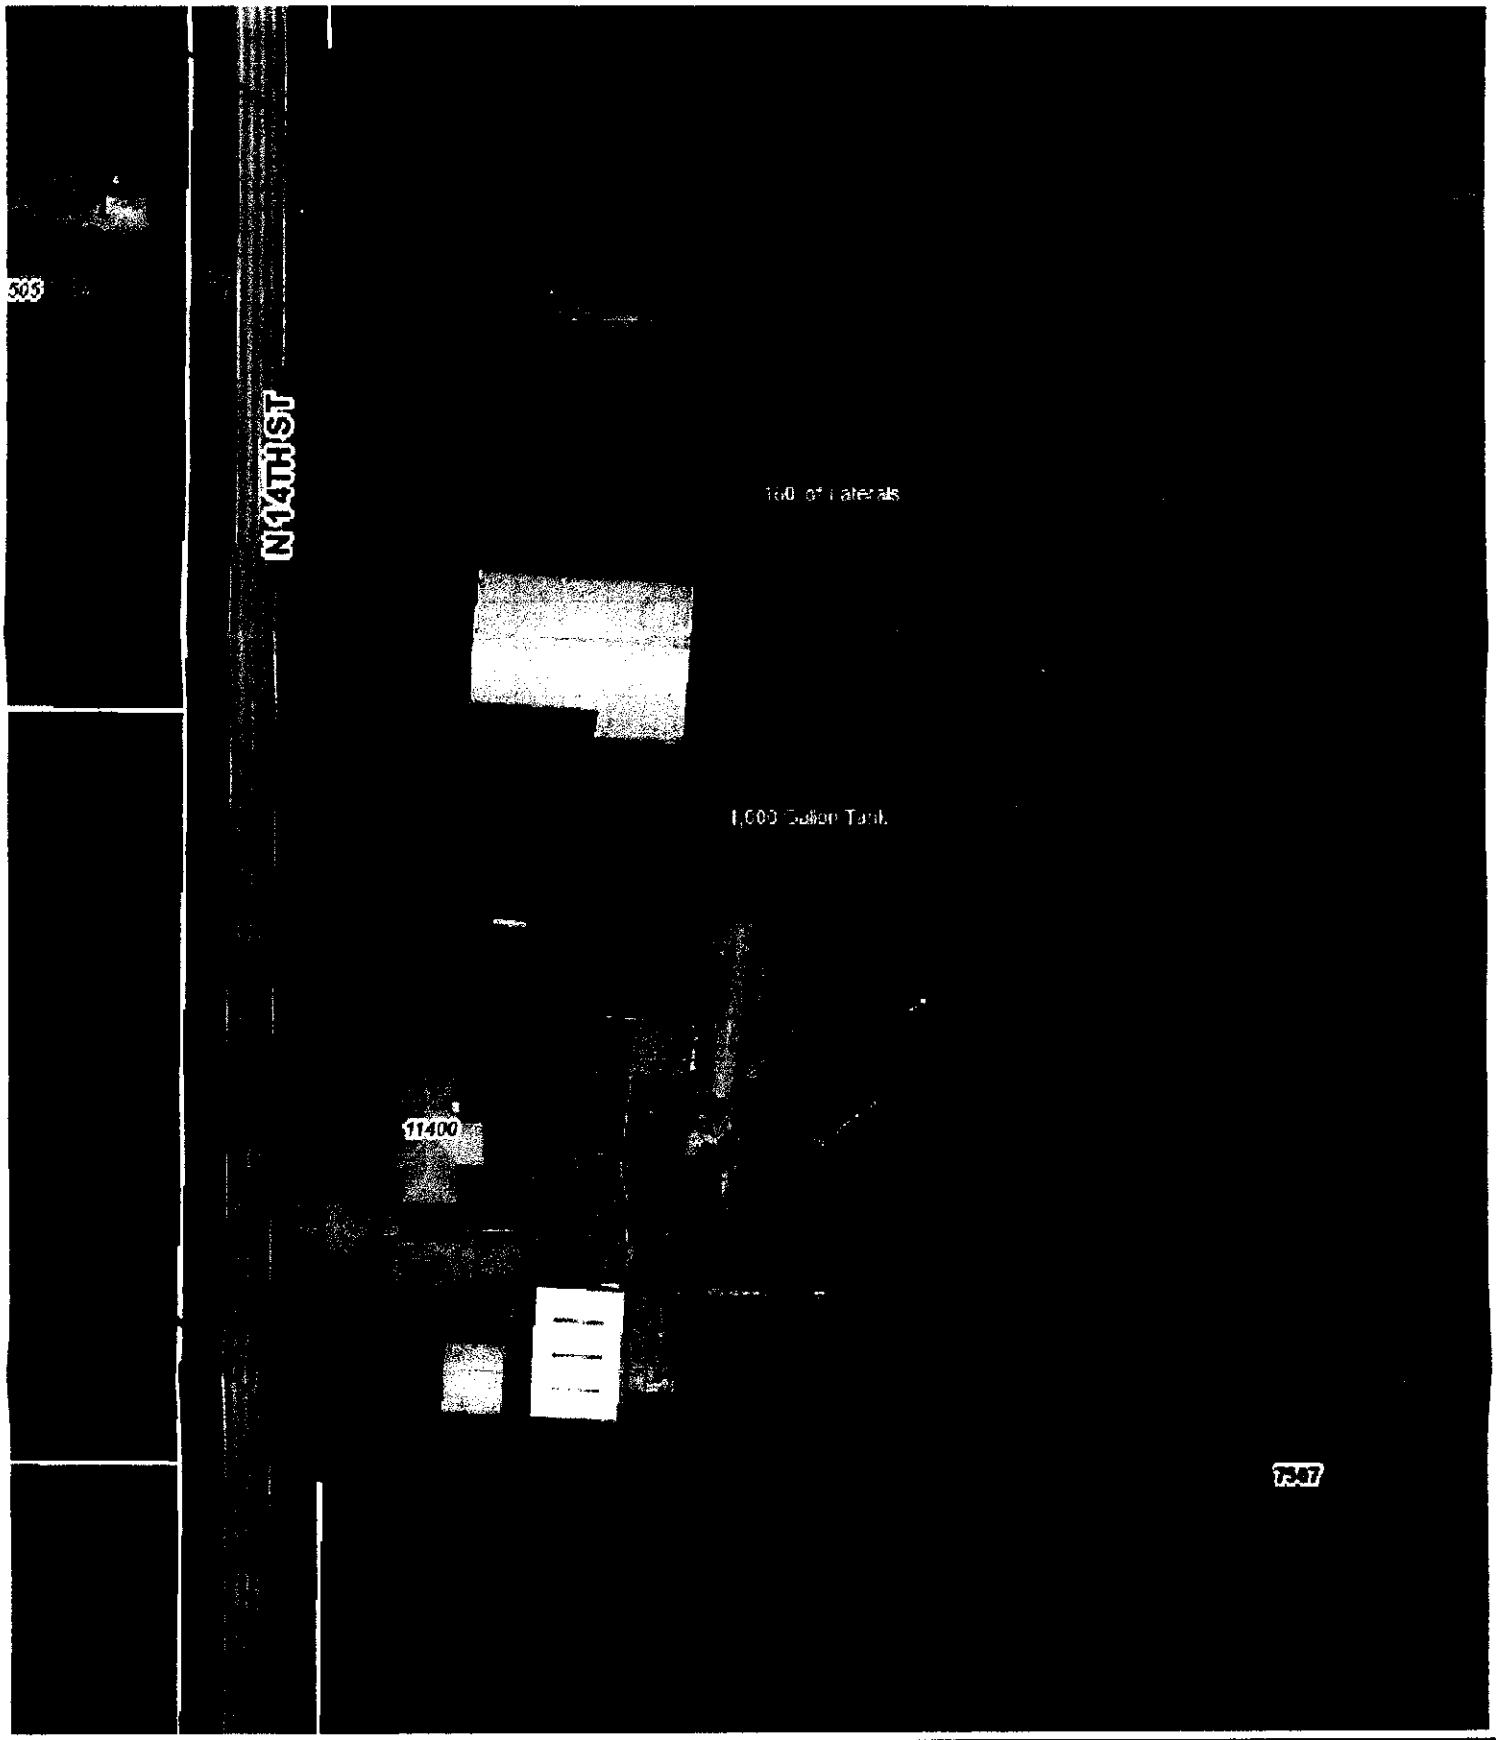

Lancaster County/City of Lincoln GIS Map

Robert Fertig 11400 N 14th St, Raymond, NE 68428

N
W E
S

Printed: Sep 29, 2017

DISCLAIMER: The information is presented on a best-efforts basis, and should not be relied upon for making financial, survey, legal or other commitments. If you have questions or comments regarding the data displayed on this map, please email ags@lincoln.ne.gov and you will be directed to the appropriate department.

Lincoln-Lancaster County Health Department
Environmental Public Health Division (402) 441-8027
3140 N Street Lincoln, Nebraska 68510-1514

ON-SITE WASTE WATER SYSTEM
CONSTRUCTION - INSTALLATION PERMIT
No. HS001548

System Type: Standard

Situs: 11400 N 14 ST, RURAL, NE

Issued: 10/4/2017

Expires: 10/4/2018

Description: S13, T11, R6, 6th Principal Meridian, LOT 8 SW NW

Owner: FERTIG, ROBERT W & LAUNA M
11400 N 14 ST
RAYMOND, NE 68428

Shavonna M. Lausterer, MPH, CPH, Health Director

Dear Applicant:

The above document is your permit to construct a new On-site Waste Water System at the location listed. Please contact this office once the sytem is complete in order to schedule a final inspection before use.

Shavonna M. Lausterer, MPH, CPH
Health Director

RAYMOND CONTRACTING
13800 NW 70 ST
RAYMOND, NE 68428