W Superior St

HEALTH ACCELA PERMITS
3131 O STREET
LINCOLN, NE 68510

12/07/2021 14:24:11


CREDIT CARD

VISA SALE

Card #	XXXXXXXXXXX5040
SEQ #:	1
Batch #:	764
INVOICE	1
Approval Code:	02333D
Entry Method:	Manual
Mode:	Online
Card Code:	M

SALE AMOUNT $450.00

CUSTOMER COPY

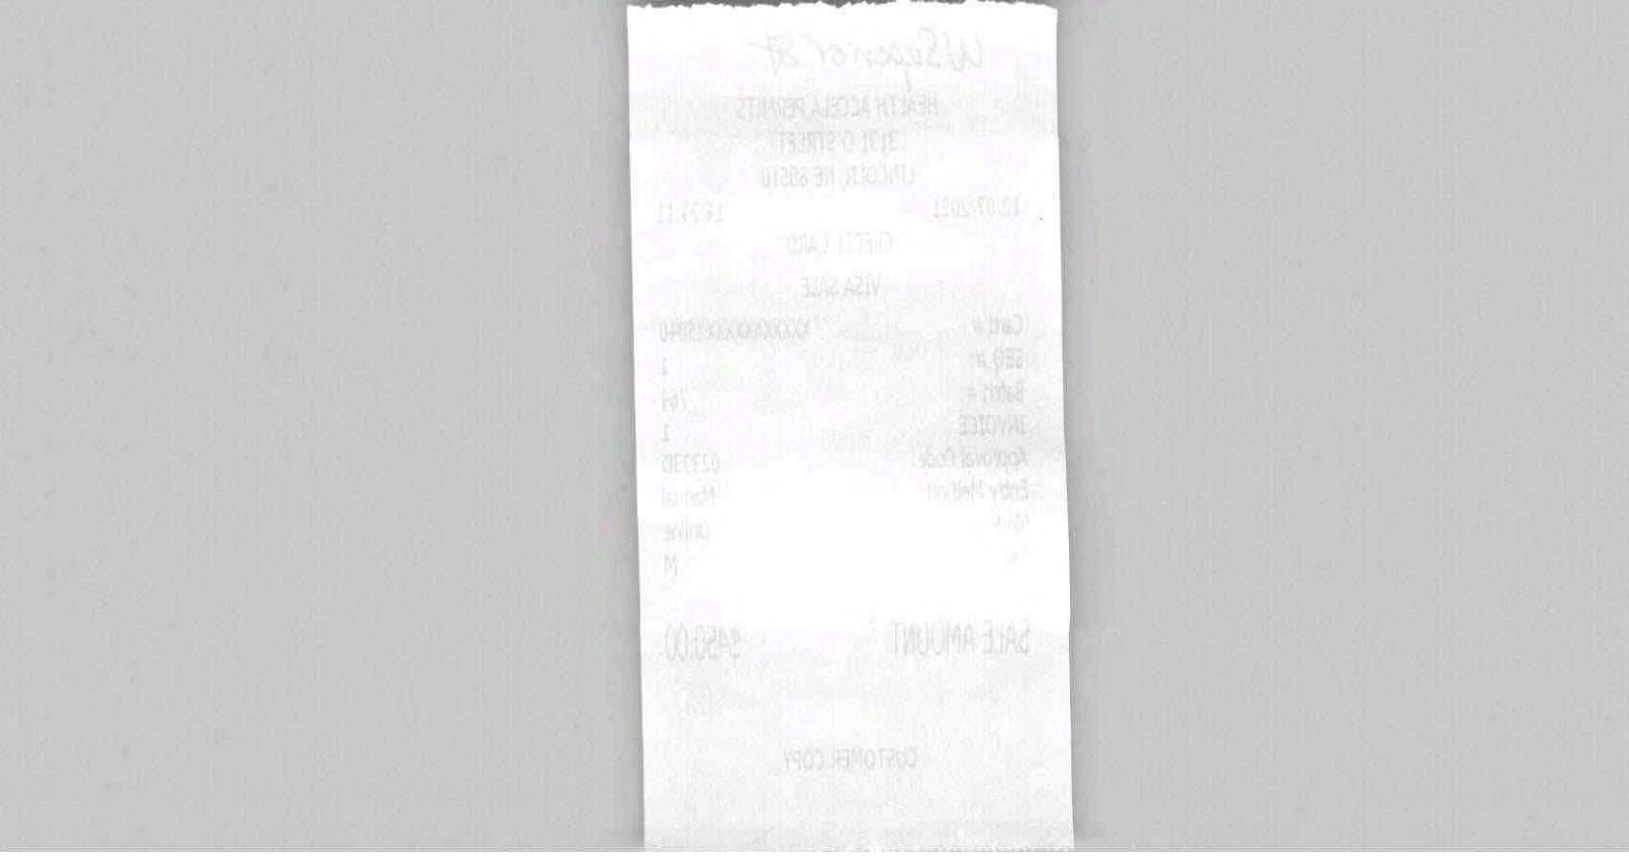

Lincoln-Lancaster County Health Department
Environmental Public Health Division (402) 441-8027
3131 O Street Lincoln, Nebraska 68510-1514

ON-SITE WASTE WATER SYSTEM
CONSTRUCTION - INSTALLATION PERMIT
No. HS002341

System Type: Standard

Situs: No Site Address Specified

Issued: 12/14/2021

Expires: 12/14/2022

Description:

Owner:

Patricia D. Lopez

Patricia D. Lopez, RN, MSN, Health Director

Dear Applicant:

The above document is your permit to construct a new On-site Waste Water System at the location listed. Please contact this office once the sytem is complete in order to schedule a final inspection before use.

Patricia D. Lopez

Patricia D. Lopez, RN, MSN
Health Director

CURTIS MEYER
9301 W SUPERIOR ST
LINCOLN, NE 68524

Lincoln-Lancaster County Health Department
Environmental Public Health Division
3131 O Street • Lincoln NE 68510-1514
Phone: 402-441-8643

A

Permit Number HS002344

New Construction

Onsite Wastewater Treatment System Permit Application

Include Form B and C. Submit correct fee with this Application

☑ Septic System ☐ Lagoon ☐ Other (Refer to Form C)

PLEASE PRINT OR TYPE

A. Onsite System Location

Address* W Superior St City Lincoln, NE Zip 68524
(no rural route)

Legal Description NW NW 10 10N 5E 32
1/4 1/4 Section Township Range Subdivison Addition Block Lot

PID 04-10-100-010-000 *Approx. Address (If to be determined) 9407 - 9799 W Superior St

B. Owner

Name Curtis Meyer Signature

Address 9301 W Superior St City/State/Zip Lincoln, NE 68524

Home Phone 402-540-5049 Work Phone

C. Certified Installer

Name: Terri Jakoubek Signature

Address 13800 NW 70th St City/State/Zip Raymond, NE 68428

Work Phone 402-783-2663

D. Engineer ☐ Check and complete if engineer designed system P.E. License Number:

Designer Name Firm Work Phone

E. This system will serve a

☑ Residential Dwelling Number of Bedrooms 2 Whirlpool Bathtub? ☐ Yes ☑ No Total Acres 20+
Garbage Grinder? ☑ Yes ☐ No

☐ Commercial Establishment/Other Facility Specify Design flow in gallons per day

Type of Wastewater ☐ Domestic ☐ Non-Domestic

DO NOT WRITE BELOW THIS LINE

Approval Process

1. Health Department
Site visits
Comments
Date rec'd 12/14/21
Date frwd 12/14/21
ACTION ☑ Approved ☐ Disapproved
Signature

2. Supt. Bldg. Insp. or Village Clerk
Comments
Date rec'd
Date frwd
ACTION ☐ Approved ☐ Disapproved
Signature

3. City or County Engineer
Comments
Date rec'd
Date frwd
ACTION ☐ Approved ☐ Disapproved
Signature

Installation Final Written Approval
By
Date

Business Office Use Only
Date Received Amount Paid
Received By Cash/Check No.

White - Health Department Yellow - Engineer Pink - Building & Safety

Form A Updated: 2/16

Lincoln-Lancaster County Health Department (LLCHD)
Environmental Public Health Division
3140 "N" Street • Lincoln, NE 68510-1514
Phone: 402-441-8022

B

Permit Number:

Onsite Wastewater Treatment System

Soil Evaluation Report

For Curtis Meyer

PLEASE PRINT OR TYPE

Onsite System Location

Address 9301 W Superior St (no rural route) City Lincoln NE, Zip 68524

Owner Leon Meyer Address 9301 W Superior St, Lincoln, NE 68524

Date of Tests 9/28/21 to 9/29/21 Weather: Precipitation Trace Temperature 70°

Percolation Test Data Table

A.	B.	C. D. E. F. Saturation/Swelling Time				G. H. I. J. K. Water Level Drop Last 30 mins of 4 hr or last 10 mins of 1 hr					L. M. N. Results		
		Start		End		Start		Initial	End				
Hole No.	Hole Depth (in)	Date (Mo/Da)	Time (Hr/Min)	Date (Mo/Da)	Time (Hr/Min)	Date (Mo/Da)	Time (Hr/Min)	Water Lev (in.)	Date (Mo/Da)	Time (Hr/Min)	Elapsed Time Interval	Water Level Drop (in)	Percolation Rates (Min/in = mpi)
1	20	9/28	3:00p	9/29	11:15a	9/29	2:45p	6	9/29	3:15p	30	1/2	60
2	21	"	"	"	"	"	"	6	"	"	"	9/16	53
3	24	"	"	"	"	"	"	6	"	"	"	5/8	48
4	22	"	"	"	"	"	"	6	"	"	"	1/2	60
5								6					
6								6					
								6					
								6					

Person Conducting Percolation Test

Name: Terri L. Jakoubek, Raymond Contracting, Inc.

Phone: 402-783-2663 or 402-890-6009

Address 13800 NW 70th St

Raymond, NE 68428 Cert #1198

Soil type (NRCS Maps/Other) Silt Loam/Silty Clay Loam

Groundwater Depth >10'

Sum of Percolation Rates: 221

Average of Rates: 55

Rate Used for Calculation: 55

DO NOT WRITE BELOW THIS LINE

Reviewing Action

Comments (Soil type, groundwater, floodplain, etc.)

Signature of Reviewing Official Date

Lincoln-Lancaster County Health Department (LLCHD)
Environmental Public Health Division
3140 "N" Street • Lincoln, NE 68510-1514
Phone: 402-441-8022

B

Permit Number: HS002331

Onsite Wastewater Treatment System

Soil Evaluation Report

For Curtis Meyer

PLEASE PRINT OR TYPE

Onsite System Location

Address 9301 W Superior St (no rural route) City Lincoln NE, Zip 68524

Owner Leon Meyer Address 9301 W Superior St, Lincoln, NE 68524

Date of Tests 9/28/21 to 9/29/21 Weather: Precipitation Trace Temperature 70°

Percolation Test Data Table

A.	B.	C.	D.	E.	F.	G.	H.	I.	J.	K.	L.	M.	N.
		Saturation/Swelling Time				Water Level Drop: Last 30 mins of 4 hr or last 10 mins of 1 hr					Results		
		Start		End		Start			End				
Hole No.	Hole Depth (in)	Date (Mo/Da)	Time (Hr/Min)	Date (Mo/Da)	Time (Hr/Min)	Date (Mo/Da)	Time (Hr/Min)	Initial Water Lev (in.)	Date (Mo/Da)	Time (Hr/Min)	Elapsed Time Interval	Water Level Drop (in)	Percolation Rates (Min/in = mpi)
1	20	9/28	3:00p	9/29	11:15a	9/29	2:45p	6	9/29	3:15p	30	1/2	60
2	21	"	"	"	"	"	"	6	"	"	"	9/16	53
3	24	"	"	"	"	"	"	6	"	"	"	5/8	48
4	22	"	"	"	"	"	"	6	"	"	"	1/2	60
5								6					
6								6					
								6					
								6					

Person Conducting Percolation Test

Name: Terri L Jakoubek, Raymond Contracting, Inc.

Phone: 402-783-2663 or 402-890-6009

Address 13800 NW 70th St

Raymond, NE 68428 Cert #1198

Soil type (NRCS Maps/Other) Silt Loam/Silty Clay Loam

Groundwater Depth >10'

Sum of Percolation Rates: 221

Average of Rates: 55

Rate Used for Calculation: 55

DO NOT WRITE BELOW THIS LINE

Reviewing Action

Comments (Soil type, groundwater, floodplain, etc.)

Signature of Reviewing Official _____ Date _____


Lincoln-Lancaster County Health Department
Environmental Public Health Division
3131 O Street • Lincoln NE 68510-1514
Phone: 402-441-8643

C

Permit Number
HS002331

Onsite Wastewater Treatment System
Preliminary Plan Specification

Draw a plot plan showing onsite system sewer lines, tank, drop or distribution boxes, drainfields, percolation test holes, well, residence, direction of groundwater flow, and reserve area for replacement onsite system.

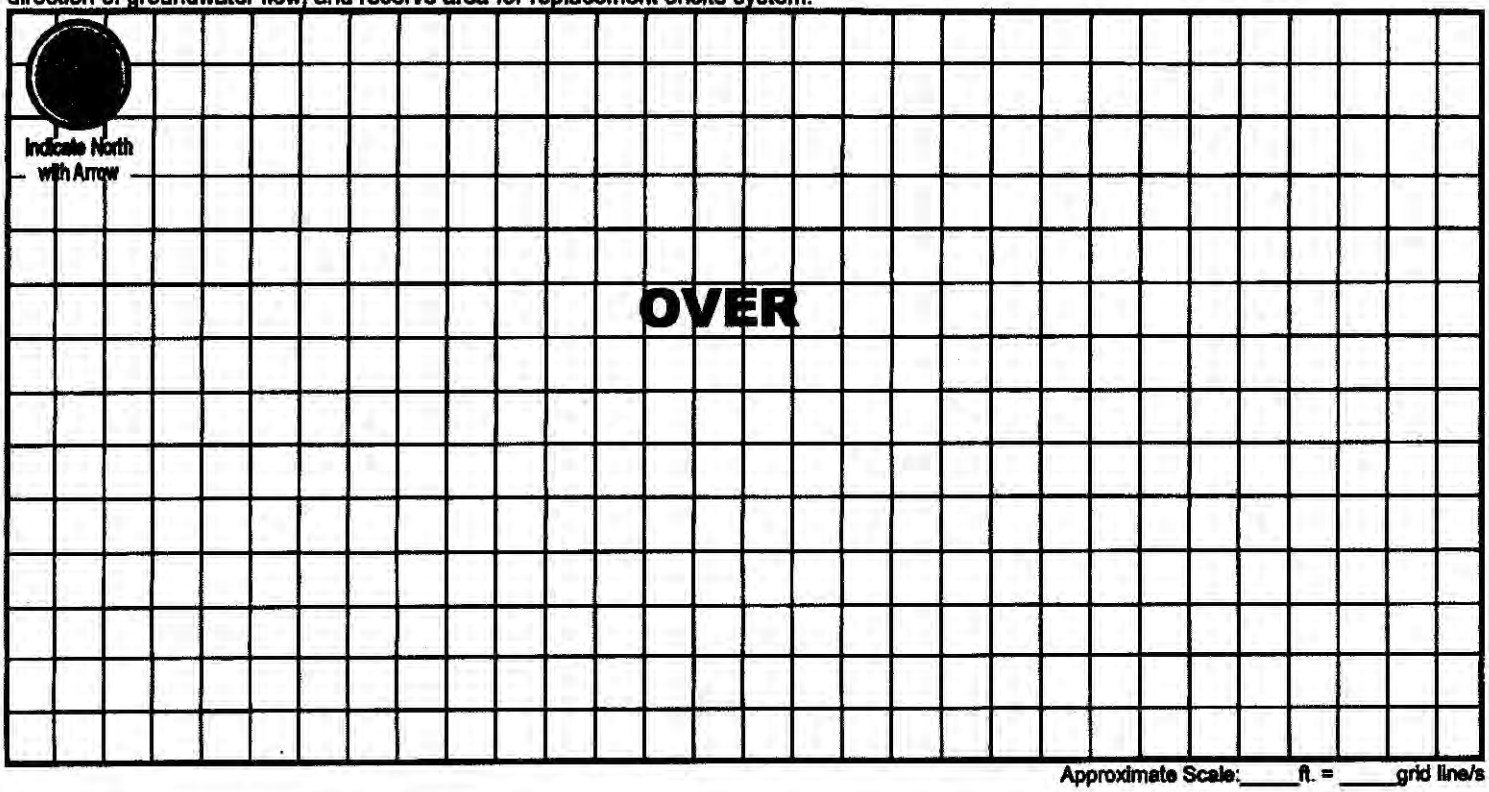

Approximate Scale: ____ ft. = ____ grid line/s

A. Onsite System Location
Address (no rural route) W Superior St City Lincoln NE, Zip 68524

B. Proposed Septic Tank/s
Septic Tank Cap. 1000 gals Tank Material: ☑ Concrete ☐ Plastic ☐ Other _____ ☐ Lagoon (Max. Seepage 1/8"/day)


C. Reserve Area for Replacement Onsite System
☐ Drainfield Absorption Area (percolation test required) ☑ Lagoon

D. Drainfield Absorption System
Percolation Rate 55 (min/inch = mpi) No. of Bedrooms 2 Soil Type Judson SL Land Slope ____ %
☑ Trench ☐ Bed ☐ Non-standard (engineer-designed and NDEQ approved) Total square feet of drainfield 720 Sq. Ft.
Total length of laterals 160 Type of Distribution: ☐ Perforated Pipe ☐ Half-Round ☐ Chambers ☑ Other EZFlow 1203H
No. of Absorption Trenches 2 Width 38" No. of Drop Boxes 1 Distribution Box _____
No. of Absorption Beds _____ Width _____ No. of Distribution Lines per Bed _____

Installer _____ Date: 11/4/21
Updated 2/18
Author _____ Date 11-4-21

GIS Viewer

City of Lincoln\Lancaster County GIS Map

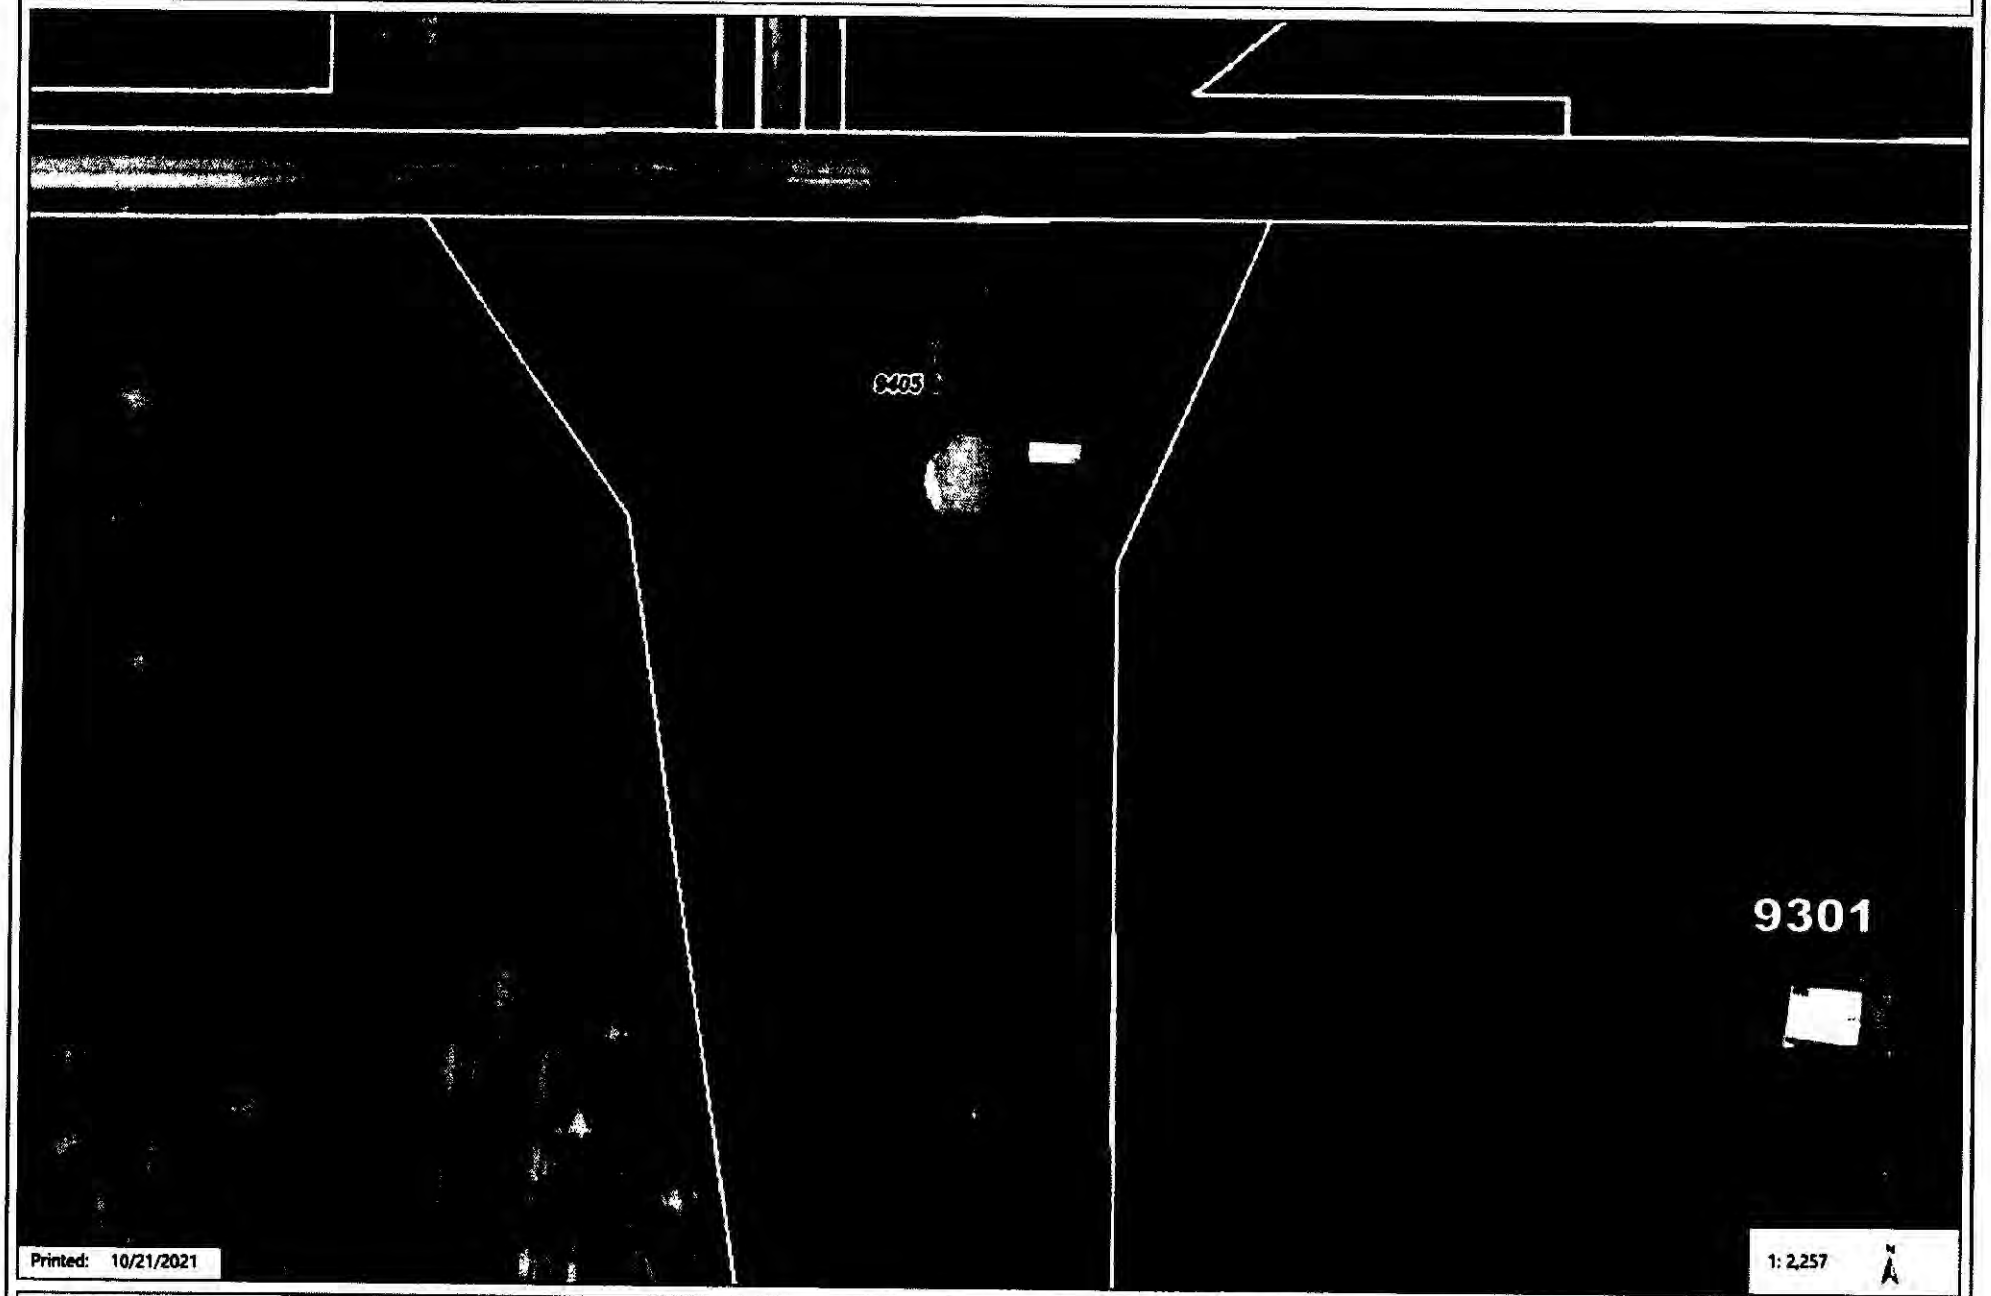

Printed: 10/21/2021

1: 2,257

Disclaimer: The information is presented on a best-efforts basis, and should not be relied upon for making financial, survey, legal or other commitments. If you have questions or comments regarding the data displayed on this map, please email assessor@lancaster.ne.gov and you will be directed to the appropriate department.

Lincoln-Lancaster County Health Department
Environmental Public Health Division (402) 441-8027
3131 O Street Lincoln, Nebraska 68510-1514

ON-SITE WASTE WATER SYSTEM
CONSTRUCTION - INSTALLATION PERMIT
No. HS002341

System Type: Standard

Situs: No Site Address Specified

Issued: 12/14/2021

Expires: 12/14/2022

Description:

Owner: CURTISS MERYER
9401 W SUPERIOR ST
LINCOLN, NE 68524

Patricia D. Lopez

Patricia D. Lopez, RN, MSN, Health Director

Dear Applicant:

The above document is your permit to construct a new On-site Waste Water System at the location listed. Please contact this office once the sytem is complete in order to schedule a final inspection before use.

Patricia D. Lopez

Patricia D. Lopez, RN, MSN
Health Director

TERRI JAKOUBEK
13800 NW 70 ST
RAYMOND, NE 68428

SCANNED

Lincoln-Lancaster County Health Department
Environmental Public Health Division
3131 O Street • Lincoln NE 68510-1514
Phone: 402-441-8643

A

Permit Number 2341
MS002341

New Construction

Onsite Wastewater Treatment System Permit Application

Include Form B and C. Submit correct fee with this Application

☑ Septic System ☐ Lagoon ☐ Other (Refer to Form C)

PLEASE PRINT OR TYPE

A. Onsite System Location

Address* 9401 W Superior St (no rural route) City Lincoln, NE Zip 68524

Legal Description NW NW 10 10N 5E 32
1/4 1/4 Section Township Range Subdivison Addition Block Lot

PID 04-10-100-010-000 *Approx. Address (If to be determined) 9407 - 9799 W Superior St

B. Owner

Name Curtis Meyer [redacted] [signature]

Address 9301 W Superior St City/State/Zip Lincoln. NE 68524

Home Phone 402-540-5049 Work Phone

C. Certified Installer

Name: Terri Jakoubek Signature [signature]

Address 13800 NW 70th St City/State/Zip Raymond, NE 68428

Work Phone 402-783-2663

D. Engineer ☐ Check and complete if engineer designed system P.E. License Number:

Designer Name Firm Work Phone

E. This system will serve a

☑ Residential Dwelling Number of Bedrooms 2 Whirlpool Bathtub? ☐ Yes ☑ No Total Acres 20+
Garbage Grinder? ☑ Yes ☐ No

☐ Commercial Establishment/Other Facility Specify Design flow in gallons per day

Type of Wastewater ☐ Domestic ☐ Non-Domestic

DO NOT WRITE BELOW THIS LINE

Approval Process

1. Health Department
Site visits
Comments
Date rec'd 12/14/21
Date frwd 12/14/21
ACTION ☑ Approved ☐ Disapproved
Signature [signature]

2. Supt. Bldg. Insp. or Village Clerk
Comments
Date rec'd
Date frwd
ACTION ☐ Approved ☐ Disapproved
Signature

3. City or County Engineer
Comments
Date rec'd
Date frwd
ACTION ☐ Approved ☐ Disapproved
Signature

Installation Final Written Approval
By [signature]
Date 4/1/22

Business Office Use Only
Date Received Amount Paid
Received By Cash/Check No.

White - Health Department Yellow - Engineer Pink - Building & Safety

Form A Updated: 2/18

See C-sheet for specs KH

Lincoln-Lancaster County Health Department (LLCHD)
Environmental Public Health Division
3140 "N" Street • Lincoln, NE 68510-1514
Phone: 402-441-8022

B

Permit Number:

Onsite Wastewater Treatment System

Soil Evaluation Report

For Curtis Meyer

PLEASE PRINT OR TYPE

Onsite System Location

Address 9301 W Superior St (no rural route) City Lincoln NE, Zip 68524

Owner Leon Meyer Address 9301 W Superior St, Lincoln, NE 68524

Date of Tests 9/28/21 to 9/29/21 Weather: Precipitation Trace Temperature 70°

Percolation Test Data Table

A.	B.	C.	D.	E.	F.	Water Level Drop G.	H.	I.	J.	K.	L.	M.	N.
		Saturation/Swelling Time				Last 30 mins of 4 hr or last 10 mins of 1 hr					Results		
		Start		End		Start		Initial	End				
Hole No.	Hole Depth (in)	Date (Mo/Da)	Time (Hr/Min)	Date (Mo/Da)	Time (Hr/Min)	Date (Mo/Da)	Time (Hr/Min)	Water Lev (in.)	Date (Mo/Da)	Time (Hr/Min)	Elapsed Time Interval	Water Level Drop (in)	Percolation Rates (Min/in = mpi)
1	20	9/28	3:00p	9/29	11:15a	9/29	2:45p	6	9/29	3:15p	30	1/2	60
2	21	"	"	"	"	"	"	6	"	"	"	9/16	53
3	24	"	"	"	"	"	"	6	"	"	"	5/8	48
4	22	"	"	"	"	"	"	6	"	"	"	1/2	60
5								6					
6								6					
								6					
								6					

Person Conducting Percolation Test

Name: Terri L Jakoubek, Raymond Contracting, Inc.

Phone: 402-783-2663 or 402-890-6009

Address 13800 NW 70th St

Raymond, NE 68428 Cert #1198

Soil type (NRCS Maps/Other) Silt Loam/Silty Clay Loam

Groundwater Depth >10'

Sum of Percolation Rates: 221

Average of Rates: 55

Rate Used for Calculation: 55

DO NOT WRITE BELOW THIS LINE

Reviewing Action

Comments (Soil type, groundwater, floodplain, etc.)

Signature of Reviewing Official Date


Lincoln-Lancaster County Health Department
Environmental Public Health Division
3131 O Street • Lincoln NE 68510-1514
Phone: 402-441-8643

C

Permit Number
HS002331

Onsite Wastewater Treatment System
Preliminary Plan Specification

Draw a plot plan showing onsite system sewer lines, tank, drop or distribution boxes, drainfields, percolation test holes, well, residence, direction of groundwater flow, and reserve area for replacement onsite system.

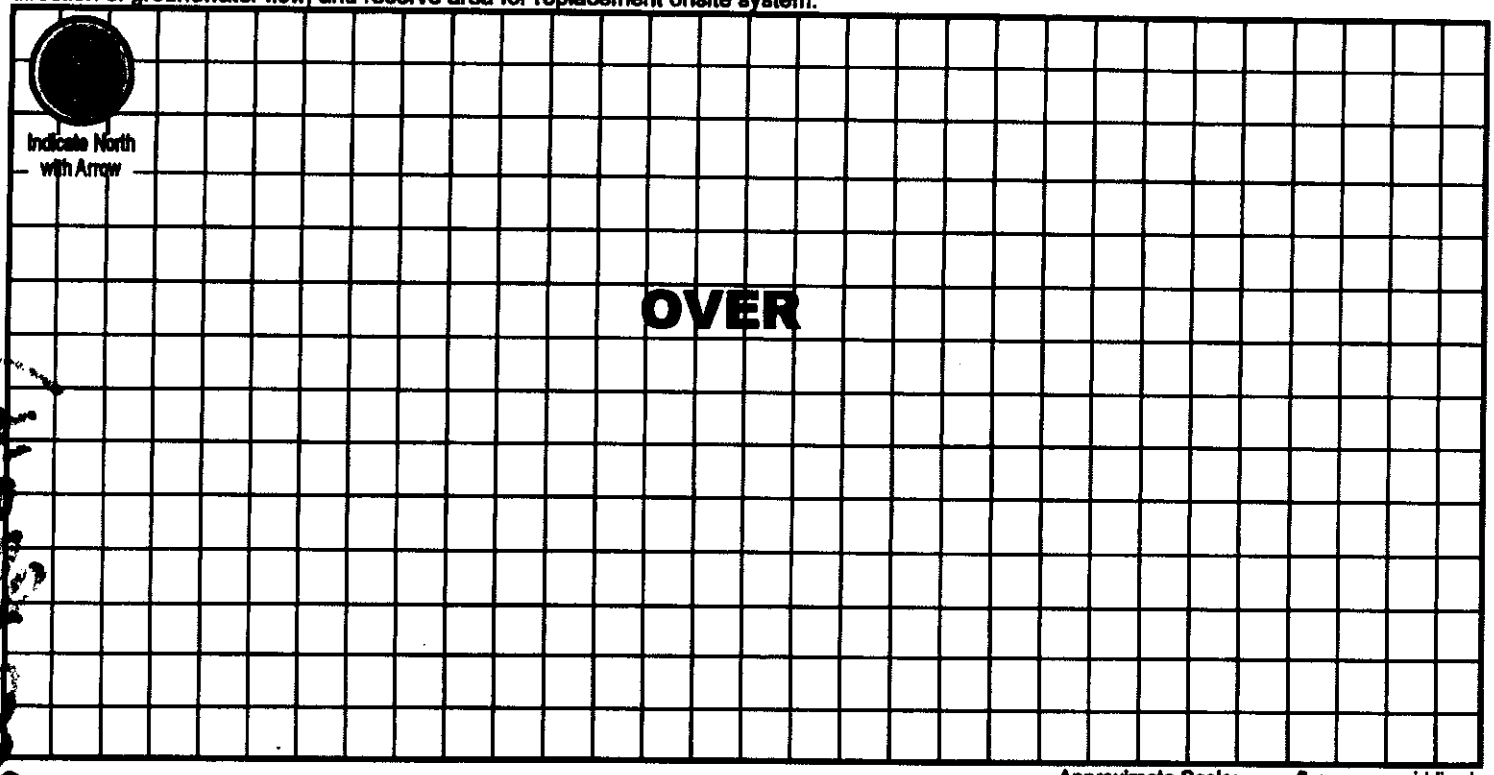

Approximate Scale: ____ ft. = ____ grid line/s

A. Onsite System Location

Address (no rural route) W Superior St City Lincoln NE, Zip 68524

B. Proposed Septic Tank/s

Septic Tank Cap. 1000 gals Tank Material: ☑ Concrete ☐ Plastic ☐ Other _____ ☐ Lagoon (Max. Seepage 1/6"/day)

C. Reserve Area for Replacement Onsite System

☐ Drainfield Absorption Area (percolation test required) ☑ Lagoon

D. Drainfield Absorption System

Percolation Rate 55 (min/inch = mpi) No. of Bedrooms 2 Soil Type Judson SL Land Slope _____ %

☑ Trench ☐ Bed ☐ Non-standard (engineer-designed and NDEQ approved) Total square feet of drainfield 720 Sq. Ft.

Total length of laterals 160' Type of Distribution: ☐ Perforated Pipe ☐ Half-Round ☐ Chambers ☑ Other EZFlow 1203H


No. of Absorption Trenches 2 Width 36" No. of Drop Boxes 1 Distribution Box _____

No. of Absorption Beds _____ Width _____ No. of Distribution Lines per Bed _____

Installer _____ Date: 11/4/21

Updated 2/18

Builder _____ Date: 11-4-21

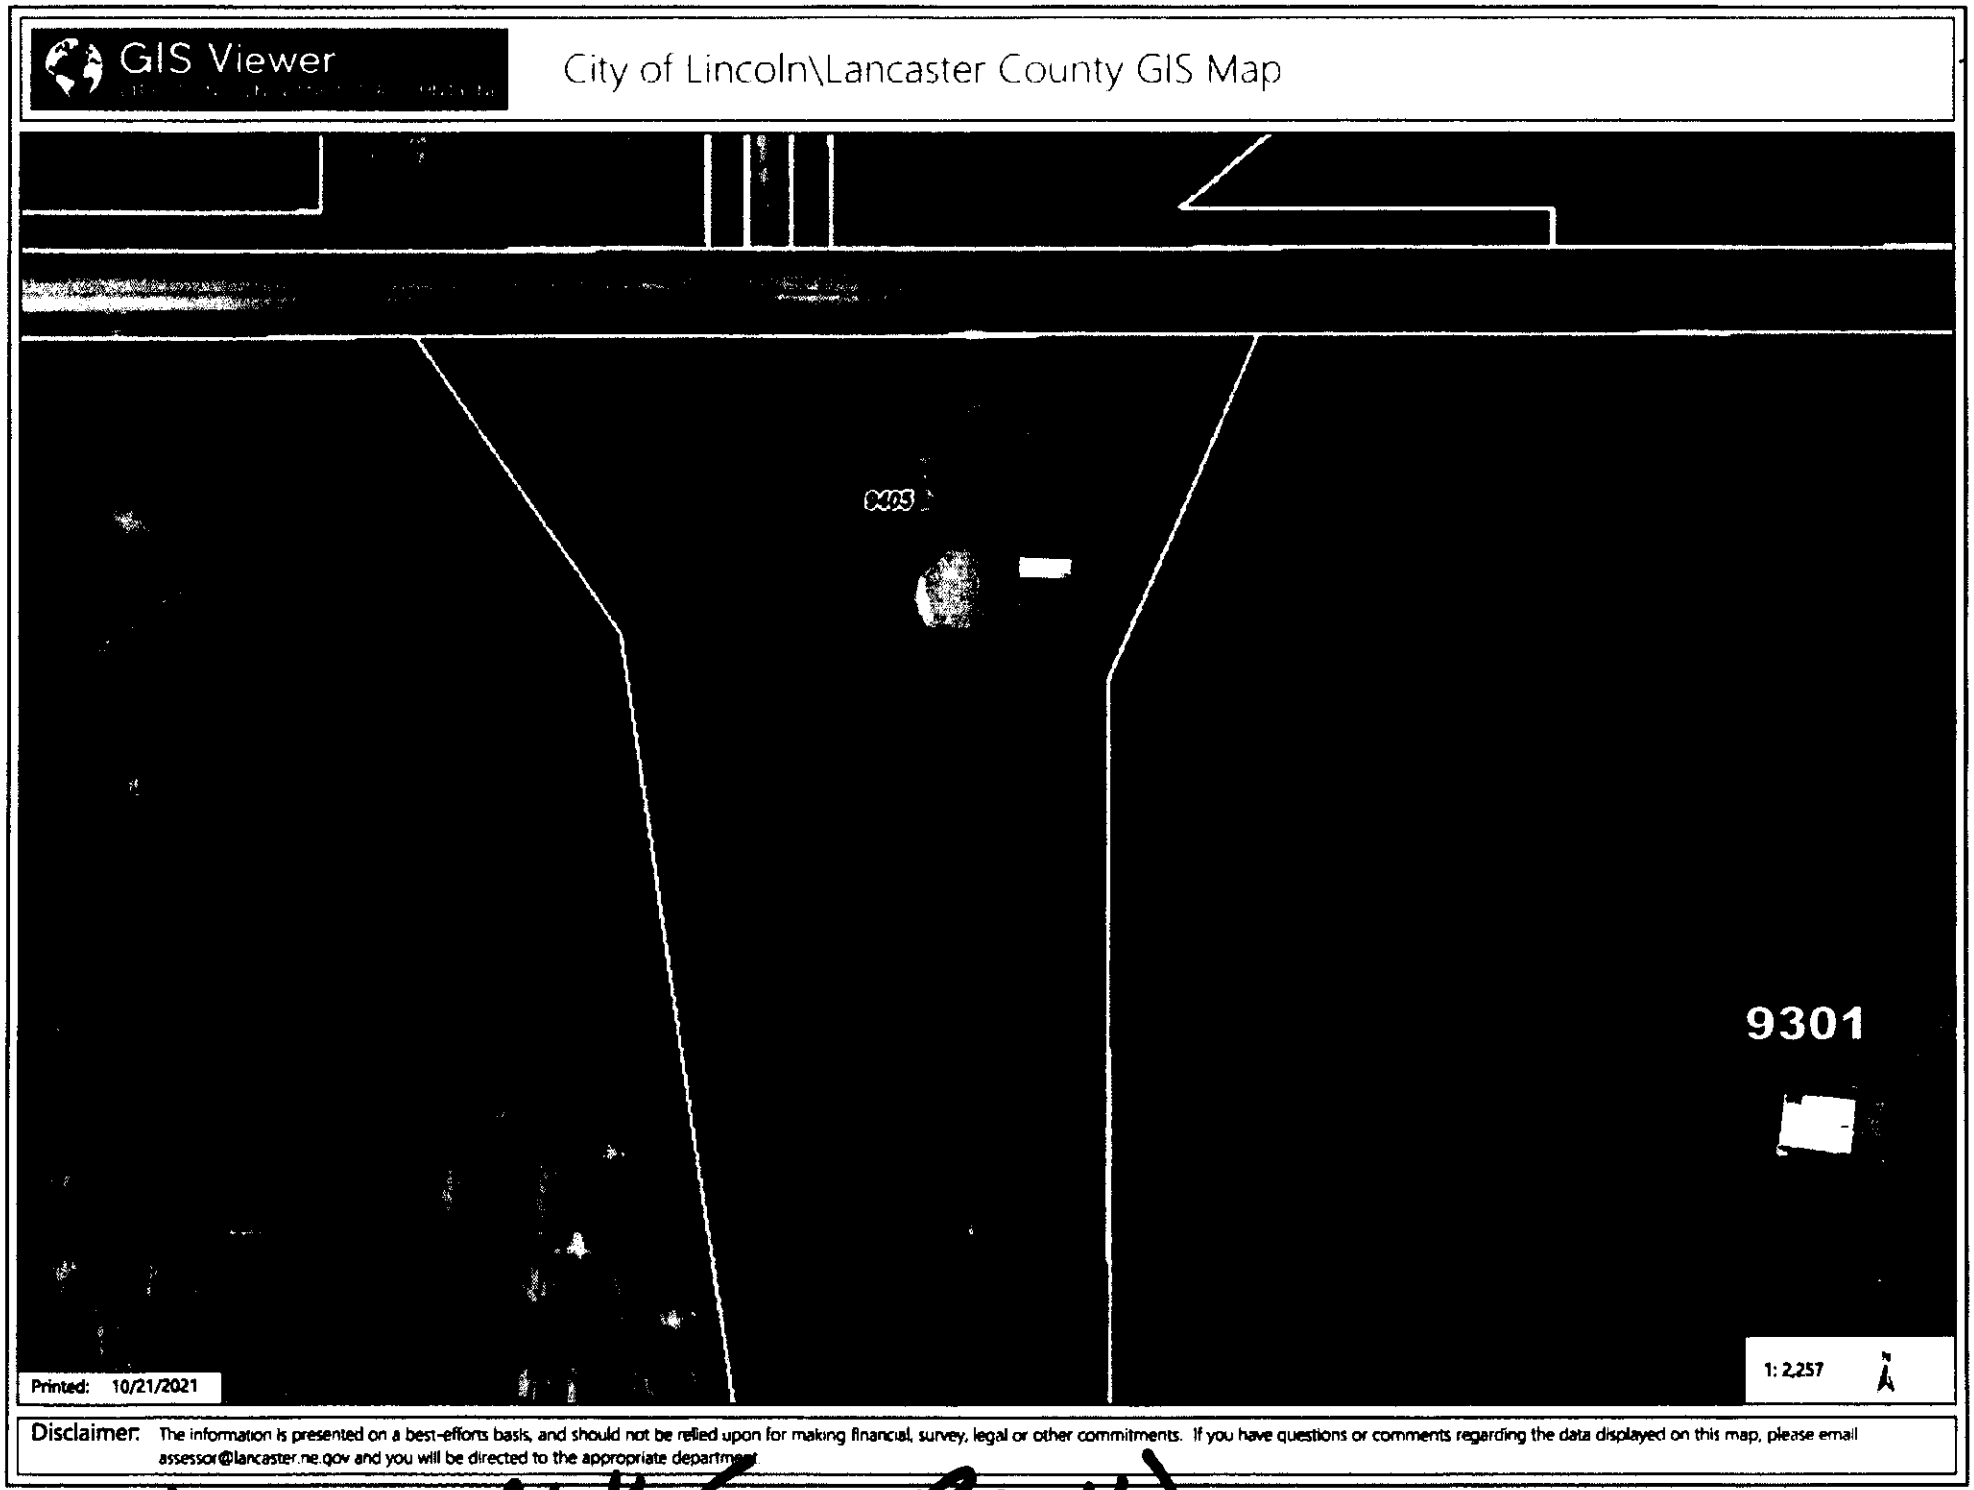

* 720 sqft * (600 Req'd)

Nate C. Hartman

From: Todd A. Stutzman
Sent: Wednesday, December 8, 2021 4:07 PM
To: Nate C. Hartman
Subject: Buildable lot

Nate,

Lot 32 located in S10, T10, R5, is a buildable lot

Todd Stutzman
Plans Examiner II
402-441-7097
tstutzman@lincoln.ne.gov


Nate C. Hartman

From: John V. Berry
Sent: Friday, December 10, 2021 1:55 PM
To: Nate C. Hartman
Subject: Sewage Disposal System PID#04 10 100 010 000
Attachments: Lot 32.pdf; F.N..pdf

Nate,

Lancaster County Engineering Department indicates approval for a Sewage Disposal System for Lot 32, Irregular Tracts, located in the NW1/4 of Section 10, Township 10 North, Range 5 East, of the 6th Principal Meridian, Lancaster County, Nebraska.
As always, subject to confirmation of and compliance with any floodplain elevation requirements prior to construction.

John V. Berry RLS #535
Lancaster County Surveyor
444 Cherrycreek Road, Bldg "C"
jberry@lancaster.ne.gov
Phone (402) 441-7681

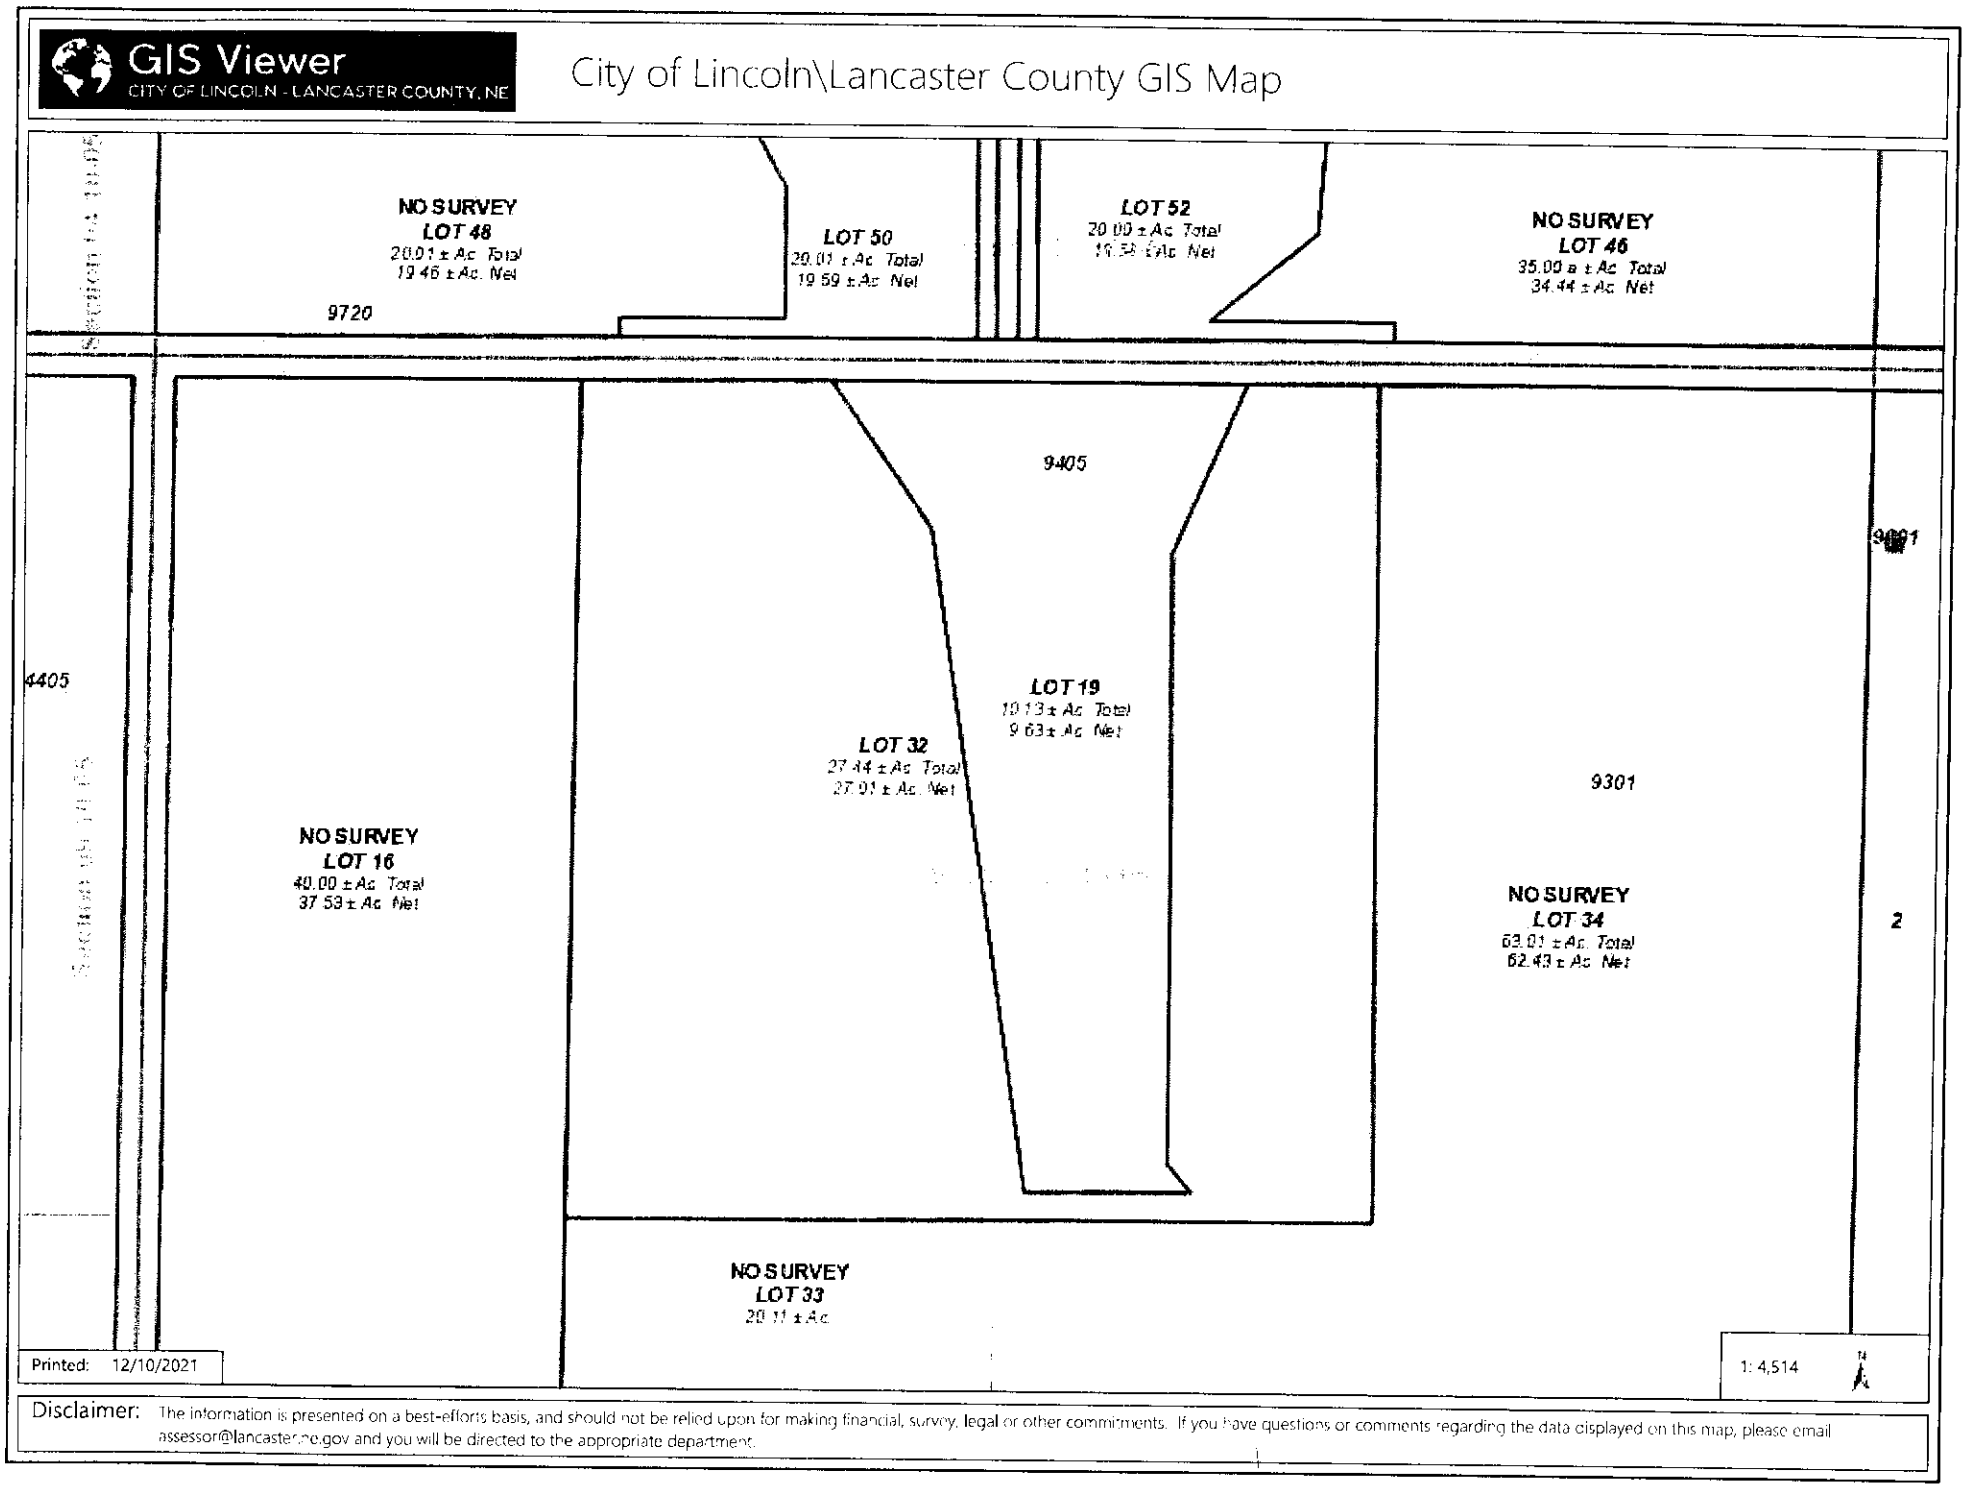

Disclaimer: The information is presented on a best-efforts basis, and should not be relied upon for making financial, survey, legal or other commitments. If you have questions or comments regarding the data displayed on this map, please email assessor@lancaster.ne.gov and you will be directed to the appropriate department.

Engineers Copy

10-10-5

Was Lots 17 & 18
Now Lot 32 of Irregular Tracts, located in the NW1/4 of Section 10, Township 10 North, Range 5 East

Deed Bk#711, Pg.570
Deed Bk#735, Pg.659
#80-2406
#83-11554
#88-34677
#89-10910
#2013-1980
#2021-68551
AA-11463
11-30-2021

Curtiss L. Meyer

The following description is based upon the information contained in Deed Book 711, page 570, Deed Book 735, page 659 and in Instrument Numbers: 80-2406, 83-11554, 88-34677, 89-10910, 2013-1980 and 2021-68551 all documents being filed with the Register of Deeds' Office and in Survey Number AA-11463

A tract of land, located in the NW1/4 of Section 10, Township 10 North, Range 5 East of the 6th Principal Meridian, Lancaster County, Nebraska, more particularly described as follows:

Referring to the northwest corner of the said NW1/4, said point being monumented with a L.C.S.M. cap; thence on an assumed bearing of N87°44'59"E, with the North line of the said NW1/4, a distance of 662.37', to a point of intersection with east line of Lot 16, Irregular Tracts, said point being a $^5/_8$" rebar for corner, said point also being the **TRUE POINT OF BEGINNING**; thence continuing N87°44'59"E, with the north line of the said NW1/4, a distance of 362.62', to a point of intersection with the west line of Lot 19, Irregular Tracts, said point being the northwest corner of Lot 19, Irregular Tracts, said point also being a $^5/_8$" rebar for corner; thence S36°43'28"E, with the west line of Lot 19, Irregular Tracts, a distance of 314.84', to a $^3/_4$" pipe for corner; thence S10°36'04"E, with the west line of Lot 19, Irregular Tracts, a distance of 1,030.62', to a point of intersection with the south line of Lot 19, Irregular Tracts, said point being the southwest corner of Lot 19, Irregular Tracts, said point also being a $^5/_8$" rebar for corner; thence N87°49'09"E, with the south line of Lot 19, Irregular Tracts, a distance of 258.70', to a point of intersection with the east line of Lot 19, Irregular Tracts, said point being the southeast corner of Lot 19, Irregular Tracts, said point also being a $^5/_8$" rebar for corner; thence, N42°42'02"W, with the east line of Lot 19, Irregular Tracts, a distance of 58.37', to a $^5/_8$" rebar for corner; thence N02°12'20"W, with the east line of Lot 19, Irregular Tracts, a distance of 939.88', to a $^3/_4$" pipe for corner; thence N21°16'37"E, with the east line of Lot 19, Irregular Tract, a distance of 322.03', to a point of intersection on the north line of the said NW1/4, said point being the northeast corner of Lot 19, Irregular Tracts, said point also being a ¾" pipe for corner; thence N87°45'04"E, with the north line of he said NW1/4, a distance of 187.38', to a $^5/_8$" rebar for corner; thence S02°14'57"E, a distance of 1,323.16', to a $^5/_8$" rebar for corner; thence S87°45'02"W, a distance of 1,245.52', to a point of intersection with the east line of Lot 16, Irregular Tracts, said point being a $^5/_8$" rebar for corner; thence N01°29'26"W, with the east line of Lot 16, Irregular Tracts, a distance 1,323.26', to **TRUE POINT OF BEGINNING**.

Containing an area of 27.44 acres, and having a net area of 27.01 acres, more or less.

Lincoln-Lancaster County Health Department
Environmental Public Health Division
3131 N Street • Lincoln NE 68510-1514
Phone: 402-441-8643

D

Permit Number: HS002341

Onsite Wastewater Treatment System
As-Built Description and Drawing

Type of Onsite Wastewater System: ☐ Lagoon (Skip to Back Page) ☑ Subsurface Septic ☐ Mound

Onsite Wastewater System Location PID = 04-10-100-010-000

Address or Legal Description or Parcel Identification Number (PID) 9601 W Superior St, Lincoln, NE 68524

Owner: Curtiss L Meyer Address 9301 W Superior St, Lincoln, NE 68524

A. Wastewater Piping

1. Material: SDR26 Diameter: 4 in.
2. Distance between dwelling and septic tank: 148 ft.

B. Septic Tank

1. Material Concrete
2. Capacity: 1000 gallon
3. Depth to top of tank, below unfinished grade: 18 in.
4. Distance to:
   Well 200 ft. +
   Pressure line N/A ft +
   Property Line 100 ft. +
   Foundation 75 ft. +

C Distribution Box or Drop Box

Distance and Direction from septic tank: 74 ft. E

D. Drainfield/Absorption Field

☑ Trench ☐ Bed

1. Type: ☐ Perforated Pipe ☐ Chamberless ☑ Other
   Material brand and inside width of Chamberless: EZFlow 1203H Bundles
2. Number of Laterals: 2 Depth: 2' - 2.5'
3. Length of each lataral (linear): ft. 80 ft. 80 ft. ____ ft. ____
4. Drainfield size: 720 sq. ft.
5. Distance to:
   Well 200 ft. +
   Pressure line N/A ft. +
   Property line 100 ft. +
   Depth of Groundwater >8'


Was the Onsite Wastewater System covered prior to LLCHD inspection? ☑ Yes (Partially) ☐ No

If Yes, the Certified Professional must sign below for final approval:

I swear and affirm that the system complies with Lincoln Municipal Code (LMC) 24.38 and/or County Resolution R-13-0062 requirements and that the information and documentation submitted are true and accurate.

Certified Professional Signature: Ronni L. Jakowatz Date: 3/31/22

Complete As-Built drawing on the back of this form.

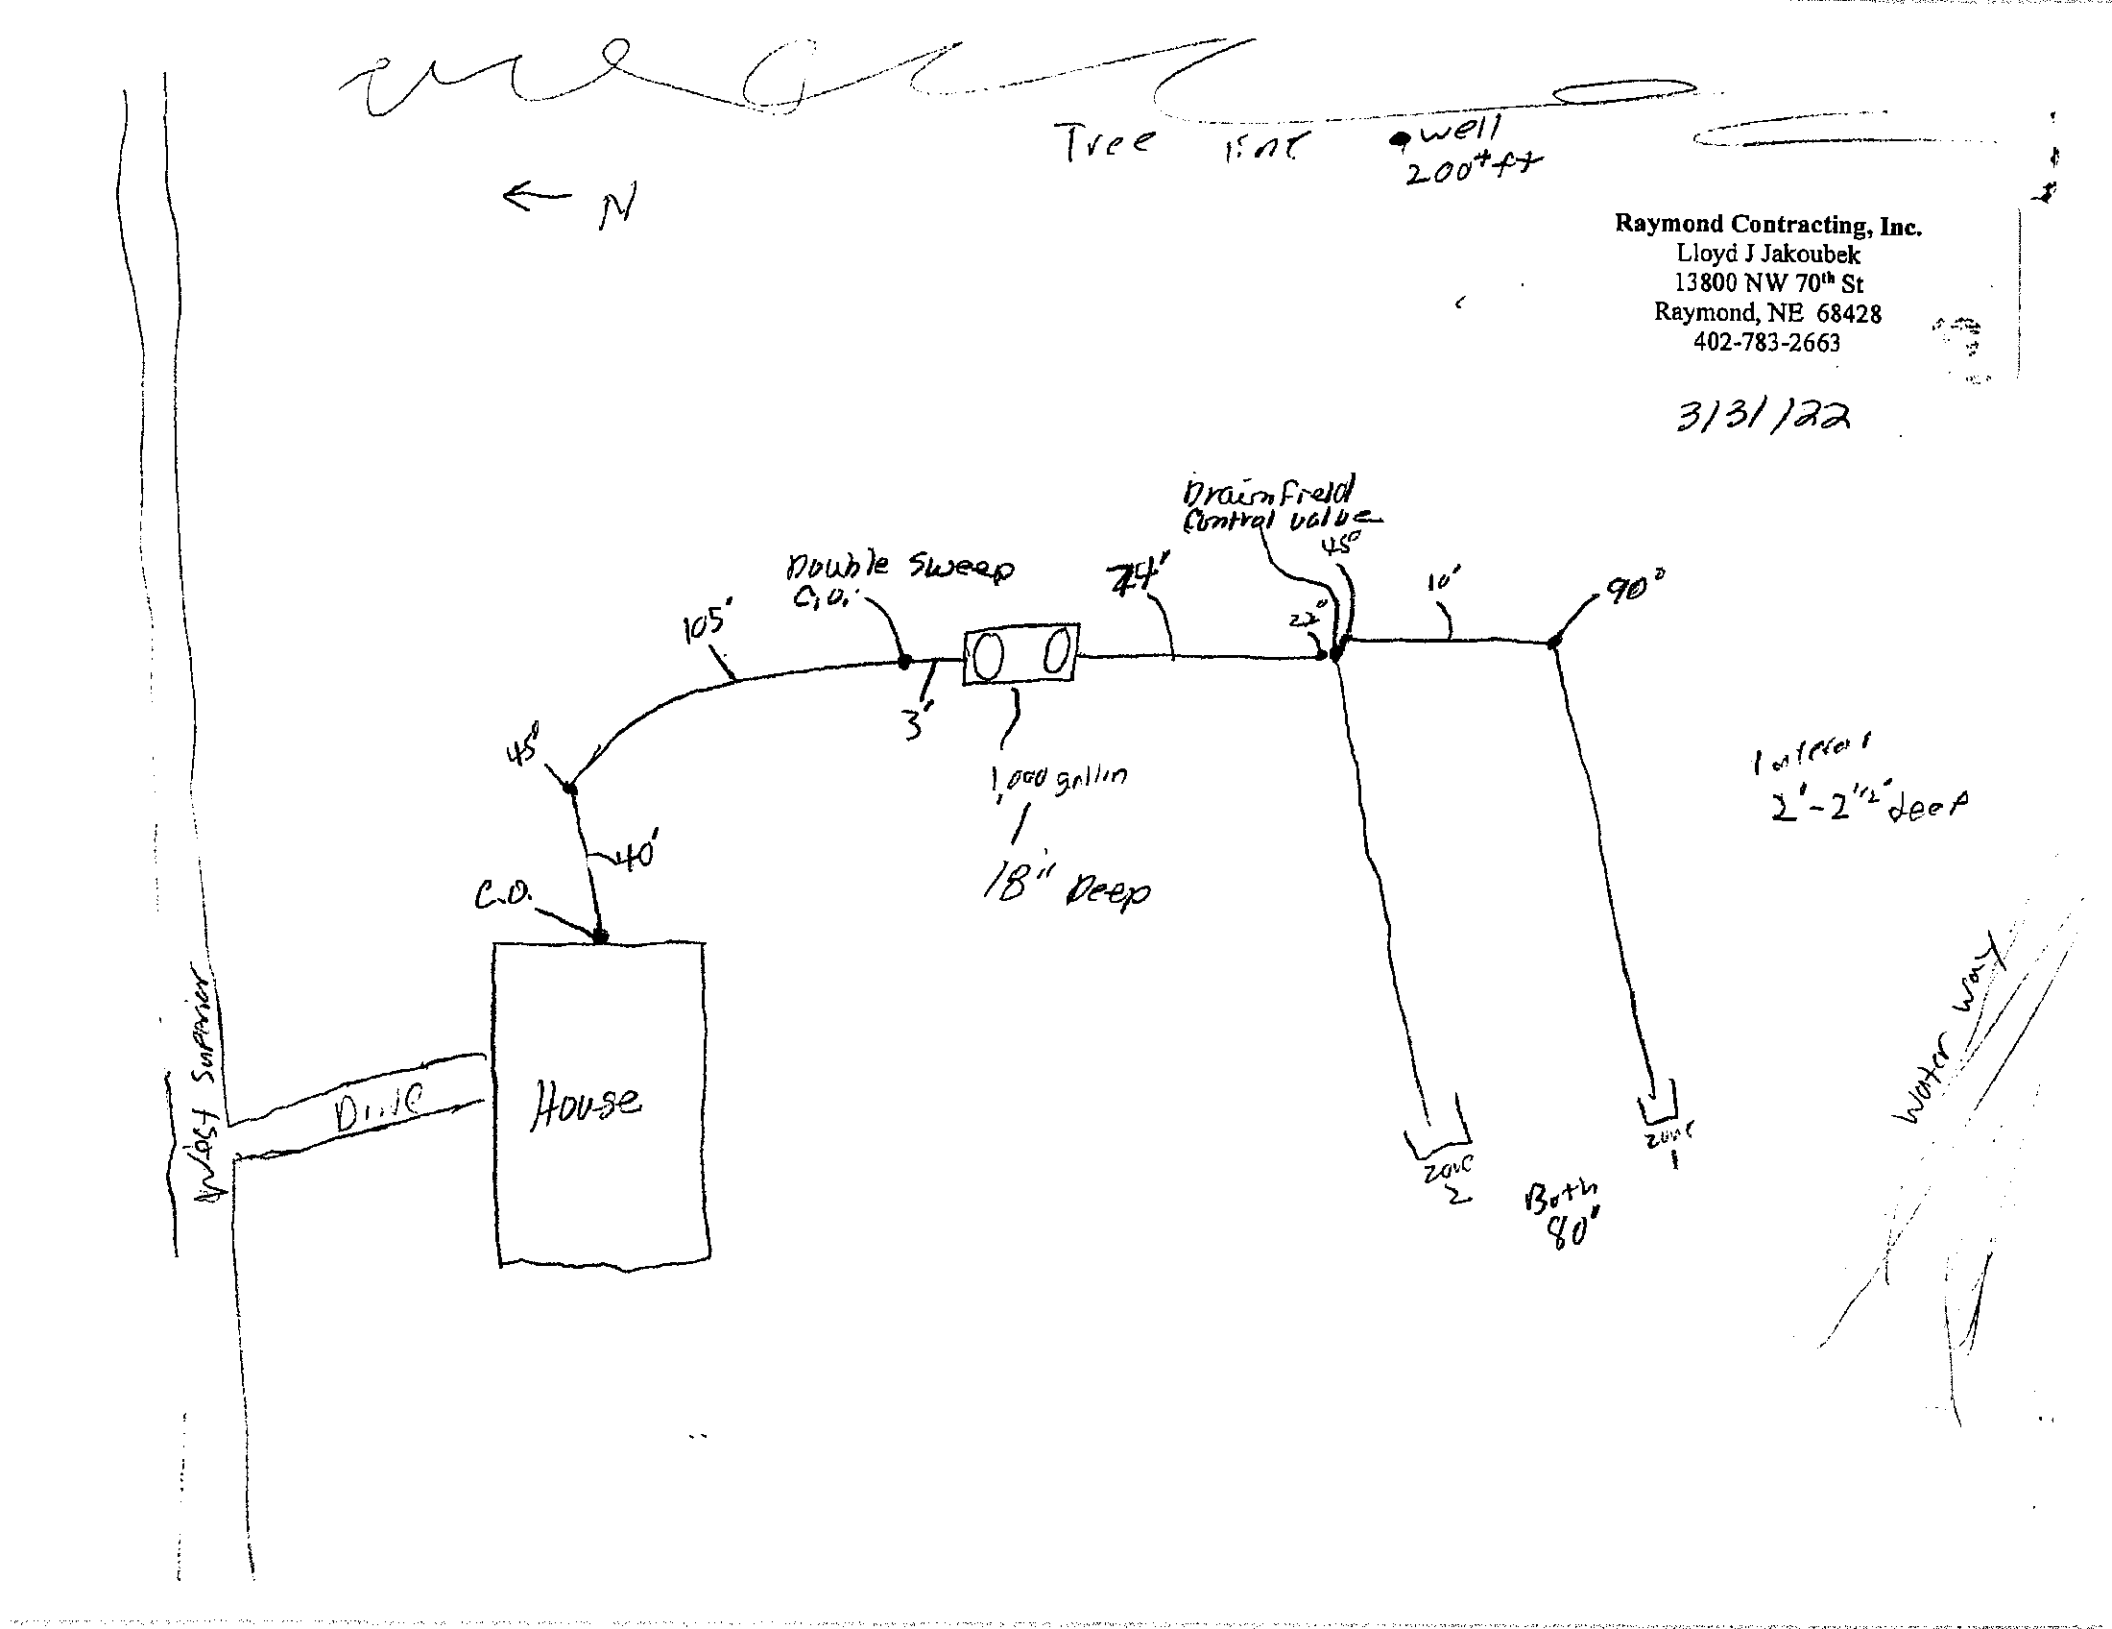
Tree
well
200+ft
N
Raymond Contracting, Inc.
Lloyd J Jakoubek
13800 NW 70th St
Raymond, NE 68428
402-783-2663
3/31/22
Drain Field Control valve
45°
Double Sweep C.O.
105'
74'
22°
10'
90°
3'
45°
40'
C.O.
1,000 gallon
18" Deep
1 at least
2'-2½' deep
House
Drive
Water Main
Water Way
Zone 2
Both 80'
Zone 1

SCANNED

Lincoln-Lancaster County Health Department
Environmental Public Health Division
3131 O Street • Lincoln NE 68510-1514
Phone: 402-441-8643

SCANNED

A

Permit Number 2341
MS00 2341

New Construction

Onsite Wastewater Treatment System Permit Application

Include Form B and C. Submit correct fee with this Application

☑ Septic System ☐ Lagoon ☐ Other (Refer to Form C)

PLEASE PRINT OR TYPE

A. Onsite System Location

Address* 9601 W Superior St (no rural route) City Lincoln, NE Zip 68524

Legal Description NW NW 10 10N 5E 32
1/4 1/4 Section Township Range Subdivison Addition Block Lot

PID 04-10-100-010-000 *Approx. Address (If to be determined) 9407 - 9799 W Superior St

B. Owner

Name Curtis Meyer Signature

Address 9301 W Superior St City/State/Zip Lincoln, NE 68524

Home Phone 402-540-5049 Work Phone

C. Certified Installer

Name: Terri Jakoubek Signature

Address 13800 NW 70th St City/State/Zip Raymond, NE 68428

Work Phone 402-783-2663

D. Engineer ☐ Check and complete if engineer designed system P.E. License Number:

Designer Name Firm Work Phone

E. This system will serve a

☑ Residential Dwelling Number of Bedrooms 2 Whirlpool Bathtub? ☐ Yes ☑ No Total Acres 20+
Garbage Grinder? ☑ Yes ☐ No

☐ Commercial Establishment/Other Facility Specify Design flow in gallons per day

Type of Wastewater ☐ Domestic ☐ Non-Domestic

DO NOT WRITE BELOW THIS LINE

Approval Process

1. Health Department
Site visits
Comments
Date rec'd 12/14/21
Date frwd 12/14/21
ACTION ☑ Approved ☐ Disapproved
Signature

2. Supt. Bldg. Insp. or Village Clerk
Comments
Date rec'd
Date frwd
ACTION ☐ Approved ☐ Disapproved
Signature

3. City or County Engineer
Comments
Date rec'd
Date frwd
ACTION ☐ Approved ☐ Disapproved
Signature

Installation Final Written Approval
By
Date 4/1/22

Business Office Use Only
Date Received Amount Paid
Received By Cash/Check No.

White - Health Department Yellow - Engineer Pink - Building & Safety

Form A Updated: 2/18

See C-sheet for specs DH

SCANNED

Lincoln-Lancaster County Health Department (LLCHD)
Environmental Public Health Division
3140 "N" Street • Lincoln, NE 68510-1514
Phone: 402-441-8022

B

Permit Number: 115002331

Onsite Wastewater Treatment System

Soil Evaluation Report

For Curtis Meyer

PLEASE PRINT OR TYPE

Onsite System Location

Address 9301 W Superior St (no rural route) City Lincoln NE, Zip 68524

Owner Leon Meyer Address 9301 W Superior St, Lincoln, NE 68524

Date of Tests 9/28/21 to 9/29/21 Weather: Precipitation Trace Temperature 70°

Percolation Test Data Table

A.	B.	C. D. E. F. Saturation/Swelling Time				G. H. I. J. K. Water Level Drop Last 30 mins of 4 hr or last 10 mins of 1 hr					L. M. N. Results		
		Start		End		Start		Initial	End				
Hole No.	Hole Depth (in)	Date (Mo/Da)	Time (Hr/Min)	Date (Mo/Da)	Time (Hr/Min)	Date (Mo/Da)	Time (Hr/Min)	Water Lev (in.)	Date (Mo/Da)	Time (Hr/Min)	Elapsed Time Interval	Water Level Drop (in)	Percolation Rates (Min/in = mpi)
1	20	9/28	3:00p	9/29	11:15a	9/29	2:45p	6	9/29	3:15p	30	1/2	60
2	21	"	"	"	"	"	"	6	"	"	"	9/16	53
3	24	"	"	"	"	"	"	6	"	"	"	5/8	48
4	22	"	"	"	"	"	"	6	"	"	"	1/2	60
5								6					
6								6					
								6					
								6					

Person Conducting Percolation Test

Name: Terri L Jakoubek, Raymond Contracting, Inc.
Phone: 402-783-2663 or 402-890-6009
Address 13800 NW 70th St
Raymond, NE 68428 Cert #1198

Sum of Percolation Rates: 221
Average of Rates: 55
Rate Used for Calculation: 55

Soil type (NRCS Maps/Other) Silt Loam/Silty Clay Loam
Groundwater Depth >10'

DO NOT WRITE BELOW THIS LINE

Reviewing Action

Comments (Soil type, groundwater, floodplain, etc.)

Signature of Reviewing Official Date

Lincoln-Lancaster County Health Department
Environmental Public Health Division
3131 O Street • Lincoln NE 68510-1514
Phone: 402-441-8643


SCANNED

C

Permit Number H5002331

Onsite Wastewater Treatment System
Preliminary Plan Specification

Draw a plot plan showing onsite system sewer lines, tank, drop or distribution boxes, drainfields, percolation test holes, well, residence, direction of groundwater flow, and reserve area for replacement onsite system.

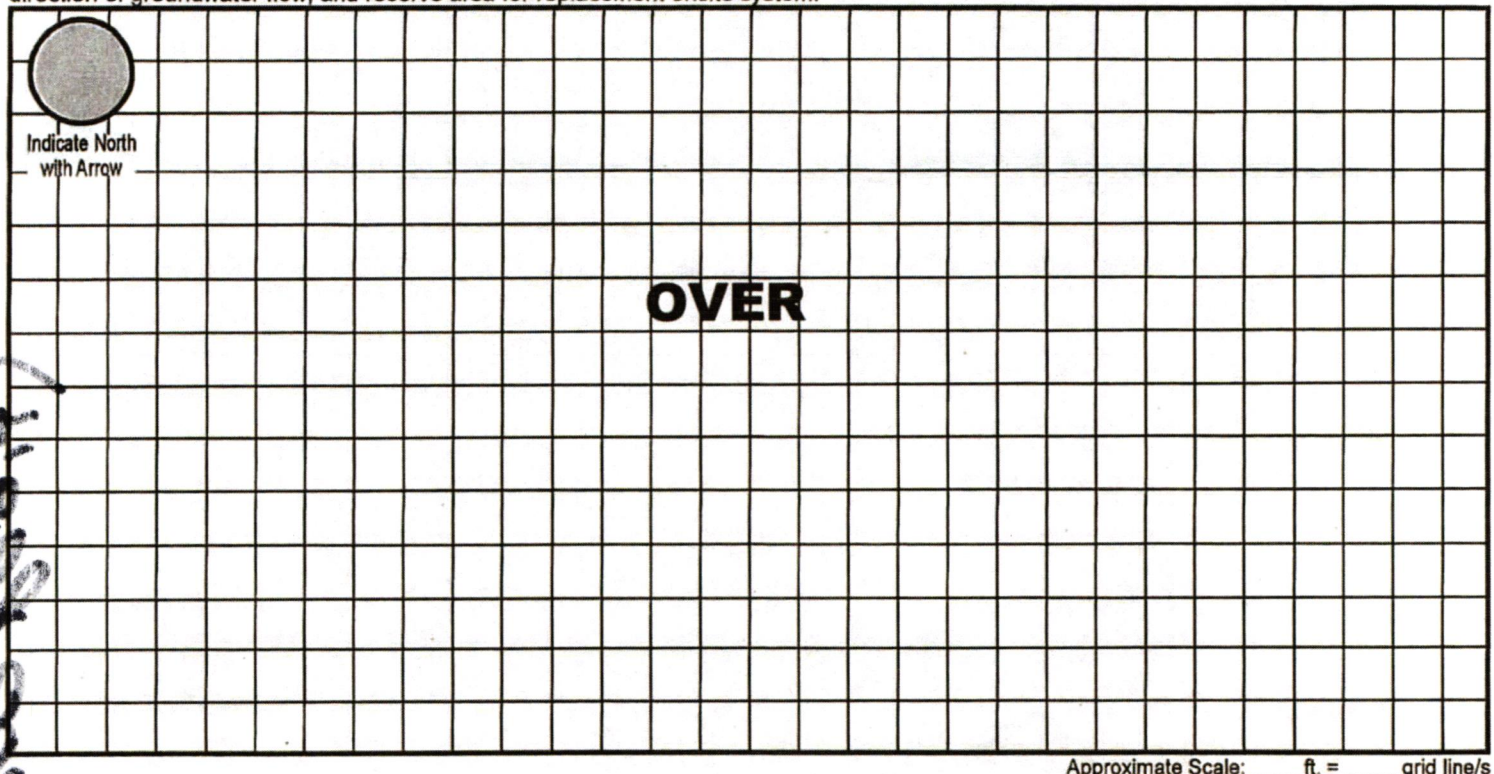

Approximate Scale: ____ ft. = ____ grid line/s

A. Onsite System Location

Address (no rural route) W Superior St City Lincoln NE, Zip 68524

B. Proposed Septic Tank/s

Septic Tank Cap. 1000 gals Tank Material: ☑ Concrete ☐ Plastic ☐ Other _____ ☐ Lagoon (Max. Seepage 1/8"/day)

C. Reserve Area for Replacement Onsite System

☐ Drainfield Absorption Area (percolation test required) ☑ Lagoon

D. Drainfield Absorption System

Percolation Rate 55 (min/inch = mpi) No. of Bedrooms 2 Soil Type Judson SL Land Slope ____ %

☑ Trench ☐ Bed ☐ Non-standard (engineer-designed and NDEQ approved) Total square feet of drainfield 720 Sq. Ft.

Total length of laterals 160' Type of Distribution: ☐ Perforated Pipe ☐ Half-Round ☐ Chambers ☑ Other EZFlow 1203H

No. of Absorption Trenches 2 Width 38" No. of Drop Boxes 1 Distribution Box _____

No. of Absorption Beds _____ Width _____ No. of Distribution Lines per Bed _____

Installer _____ Date: 11/4/21

Updated 2/18

Builder _____ Date: 11-4-21



+720 sqft + (600 Req'd)

SCANNED

Lincoln-Lancaster County Health Department
Environmental Public Health Division
3131 N Street • Lincoln NE 68510-1514
Phone: 402-441-8643

D

Permit Number: HS002341

Onsite Wastewater Treatment System
As-Built Description and Drawing

Type of Onsite Wastewater System: ☐ Lagoon (Skip to Back Page) ☑ Subsurface Septic ☐ Mound

Onsite Wastewater System Location PID = 04-10-100-010-000

Address or Legal Description or Parcel Identification Number (PID) 9601 W Superior St, Lincoln, NE 68524

Owner: Curtiss L Meyer Address 9301 W Superior St, Lincoln, NE 68524

A. Wastewater Piping

1. Material: SDR26 Diameter: 4 in.
2. Distance between dwelling and septic tank: 148 ft.

B. Septic Tank

1. Material Concrete
2. Capacity: 1000 gallon
3. Depth to top of tank, below unfinished grade: 18 in.
4. Distance to:
   Well 200 ft. +
   Pressure line N/A ft +
   Property Line 100 ft. +
   Foundation 75 ft. +

C Distribution Box or Drop Box

Distance **and** Direction from septic tank: 74 ft. E

D. Drainfield/Absorption Field

☑ Trench ☐ Bed

1. Type: ☐ Perforated Pipe ☐ Chamberless ☑ Other
   Material brand and inside width of Chamberless: EZFlow 1203H Bundles
2. Number of Laterals: 2 Depth: 2' - 2.5'
3. Length of each lataral (linear): ft. 80 ft. 80 ft. ____ ft. ____
4. Drainfield size: 720 sq. ft.
5. Distance to:
   Well 200 ft. +
   Pressure line N/A ft. +
   Property line 100 ft. +
   Depth of Groundwater >8'

Was the Onsite Wastewater System covered prior to LLCHD inspection? ☑ Yes (Partially) ☐ No

If Yes, the Certified Professional must sign below for final approval:


I swear and affirm that the system complies with Lincoln Municipal Code (LMC) 24.38 and/or County Resolution R-13-0062 requirements and that the information and documentation submitted are true and accurate.

Certified Professional Signature: Neri L. Jakowski Date: 3/31/22

Complete As-Built drawing on the back of this form.

Raymond Contracting, Inc.
Lloyd J Jakoubek
13800 NW 70th St
Raymond, NE 68428
402-783-2663

3/31/22

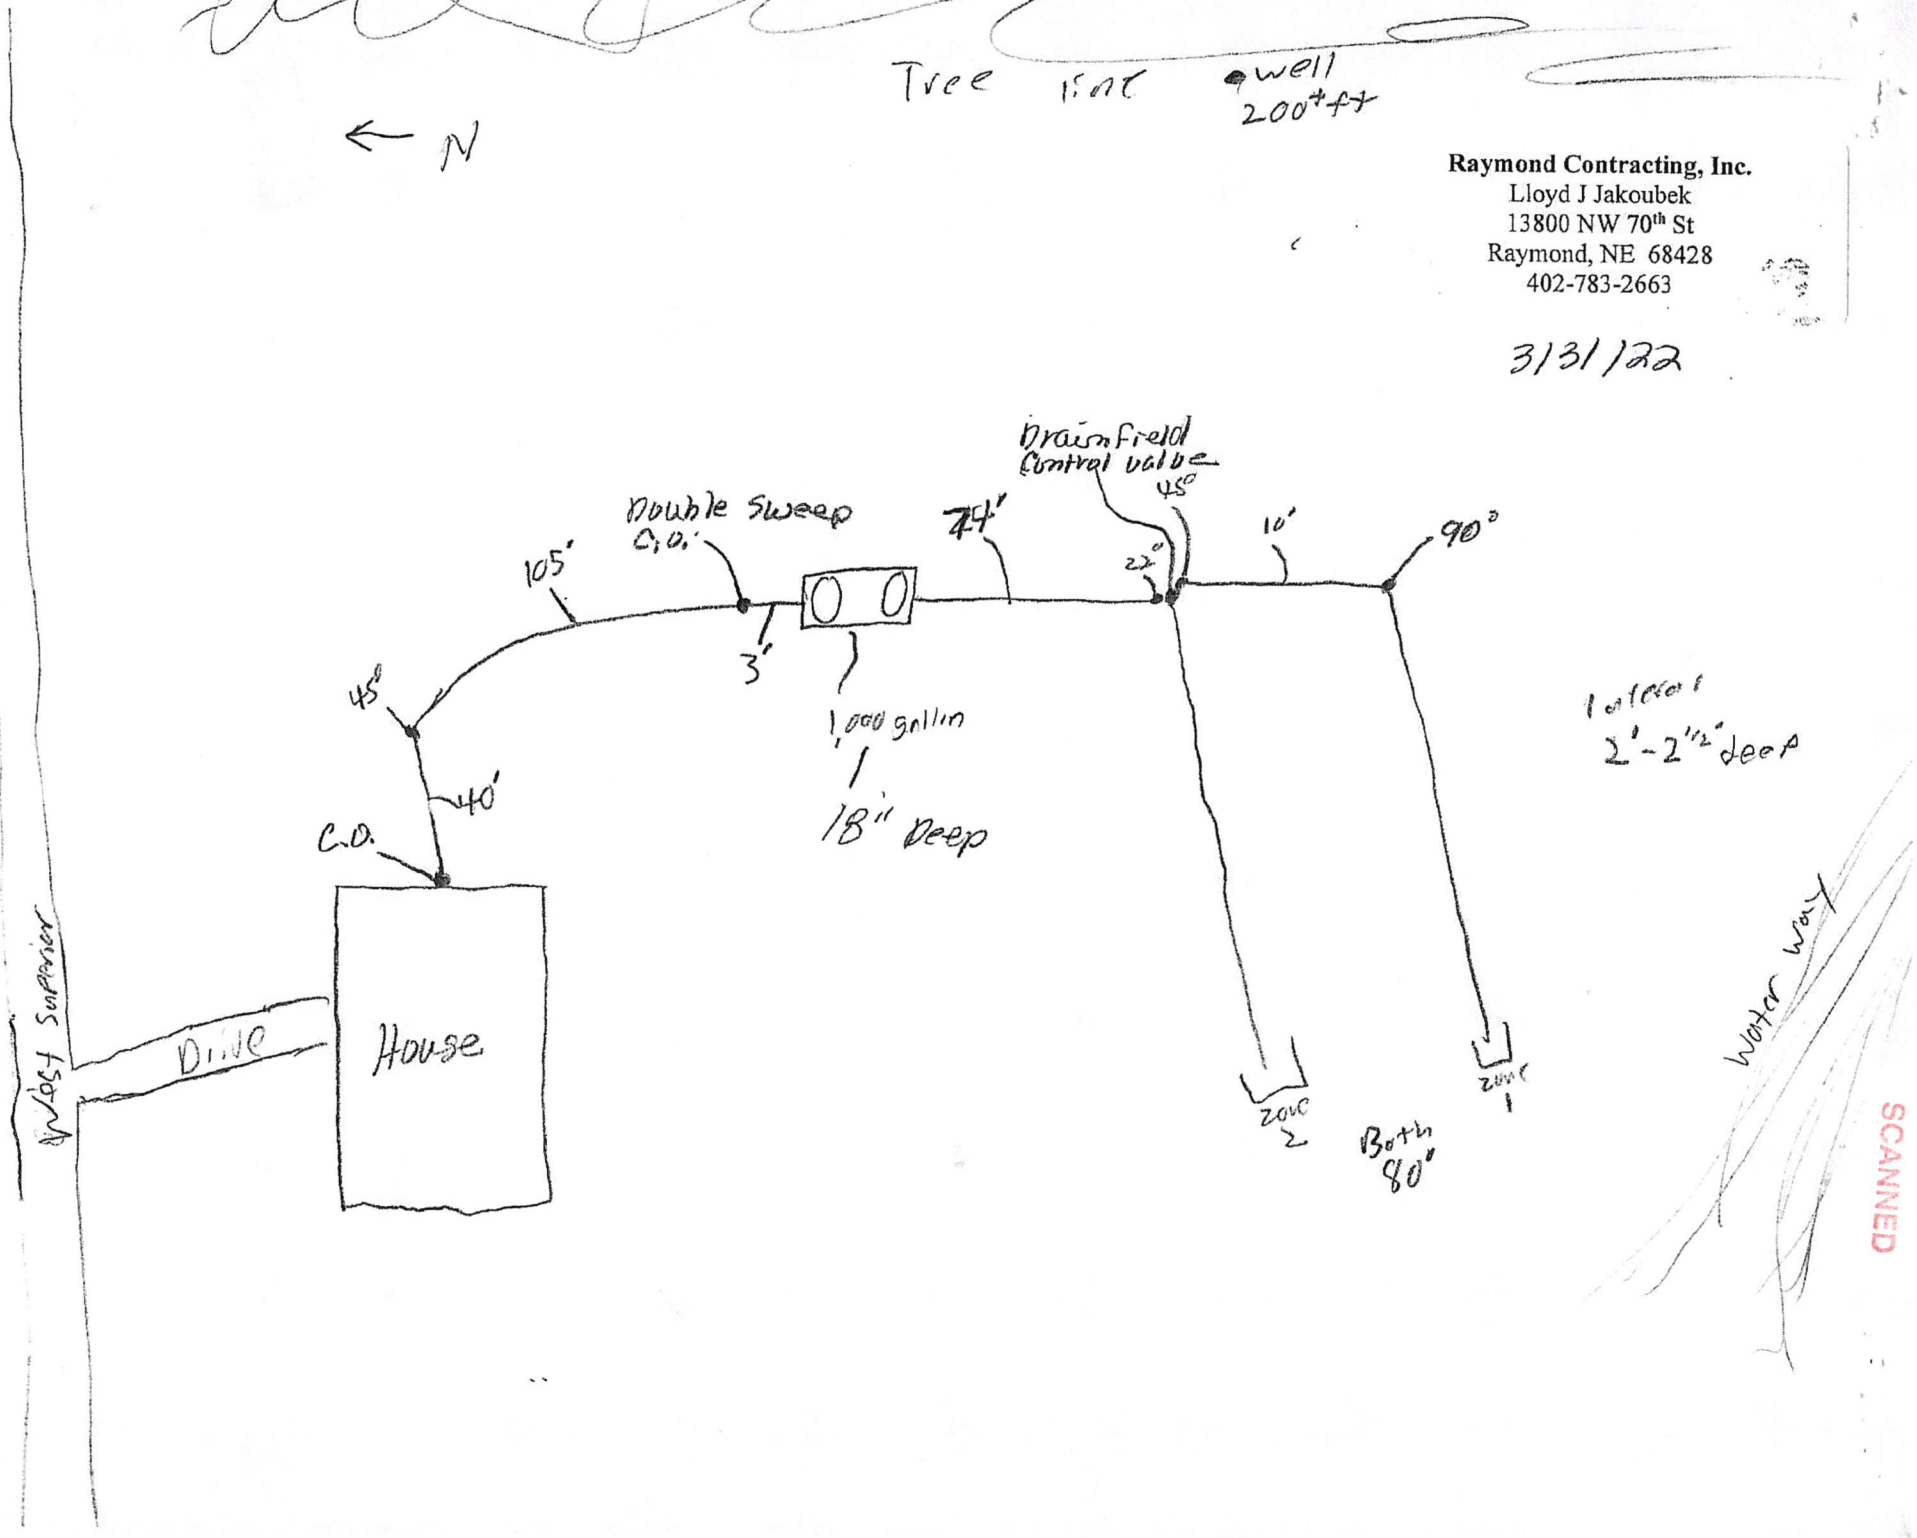

SCANNED

SCANNED

Engineers Copy

10-10-5

Was Lots 17 & 18
Now Lot 32 of Irregular Tracts, located in the NW1/4 of Section 10, Township 10 North, Range 5 East

Deed Bk#711, Pg.570
Deed Bk#735, Pg.659
#80-2406
#83-11554
#88-34677
#89-10910
#2013-1980
#2021-68551
AA-11463
11-30-2021

Curtiss L. Meyer

The following description is based upon the information contained in Deed Book 711, page 570, Deed Book 735, page 659 and in Instrument Numbers: 80-2406, 83-11554, 88-34677, 89-10910, 2013-1980 and 2021-68551 all documents being filed with the Register of Deeds' Office and in Survey Number AA-11463


A tract of land, located in the NW1/4 of Section 10, Township 10 North, Range 5 East of the 6th Principal Meridian, Lancaster County, Nebraska, more particularly described as follows:

Referring to the northwest corner of the said NW1/4, said point being monumented with a L.C.S.M. cap; thence on an assumed bearing of N87°44'59"E, with the North line of the said NW1/4, a distance of 662.37', to a point of intersection with east line of Lot 16, Irregular Tracts, said point being a $^{5}/_{8}$" rebar for corner, said point also being the **TRUE POINT OF BEGINNING**; thence continuing N87°44'59"E, with the north line of the said NW1/4, a distance of 362.62', to a point of intersection with the west line of Lot 19, Irregular Tracts, said point being the northwest corner of Lot 19, Irregular Tracts, said point also being a $^{5}/_{8}$" rebar for corner; thence S36°43'28"E, with the west line of Lot 19, Irregular Tracts, a distance of 314.84', to a $^{3}/_{4}$" pipe for corner; thence S10°36'04"E, with the west line of Lot 19, Irregular Tracts, a distance of 1,030.62', to a point of intersection with the south line of Lot 19, Irregular Tracts, said point being the southwest corner of Lot 19, Irregular Tracts, said point also being a $^{5}/_{8}$" rebar for corner; thence N87°49'09"E, with the south line of Lot 19, Irregular Tracts, a distance of 258.70', to a point of intersection with the east line of Lot 19, Irregular Tracts, said point being the southeast corner of Lot 19, Irregular Tracts, said point also being a $^{5}/_{8}$" rebar for corner; thence, N42°42'02"W, with the east line of Lot 19, Irregular Tracts, a distance of 58.37', to a $^{5}/_{8}$" rebar for corner; thence N02°12'20"W, with the east line of Lot 19, Irregular Tracts, a distance of 939.88', to a $^{3}/_{4}$" pipe for corner; thence N21°16'37"E, with the east line of Lot 19, Irregular Tract, a distance of 322.03', to a point of intersection on the north line of the said NW1/4, said point being the northeast corner of Lot 19, Irregular Tracts, said point also being a ¾" pipe for corner; thence N87°45'04"E, with the north line of he said NW1/4, a distance of 187.38', to a $^{5}/_{8}$" rebar for corner; thence S02°14'57"E, a distance of 1,323.16', to a $^{5}/_{8}$" rebar for corner; thence S87°45'02"W, a distance of 1,245.52', to a point of intersection with the east line of Lot 16, Irregular Tracts, said point being a $^{5}/_{8}$" rebar for corner; thence N01°29'26"W, with the east line of Lot 16, Irregular Tracts, a distance 1,323.26', to **TRUE POINT OF BEGINNING**.

Containing an area of 27.44 acres, and having a net area of 27.01 acres, more or less.

GIS Viewer
CITY OF LINCOLN - LANCASTER COUNTY, NE

City of Lincoln\Lancaster County GIS Map

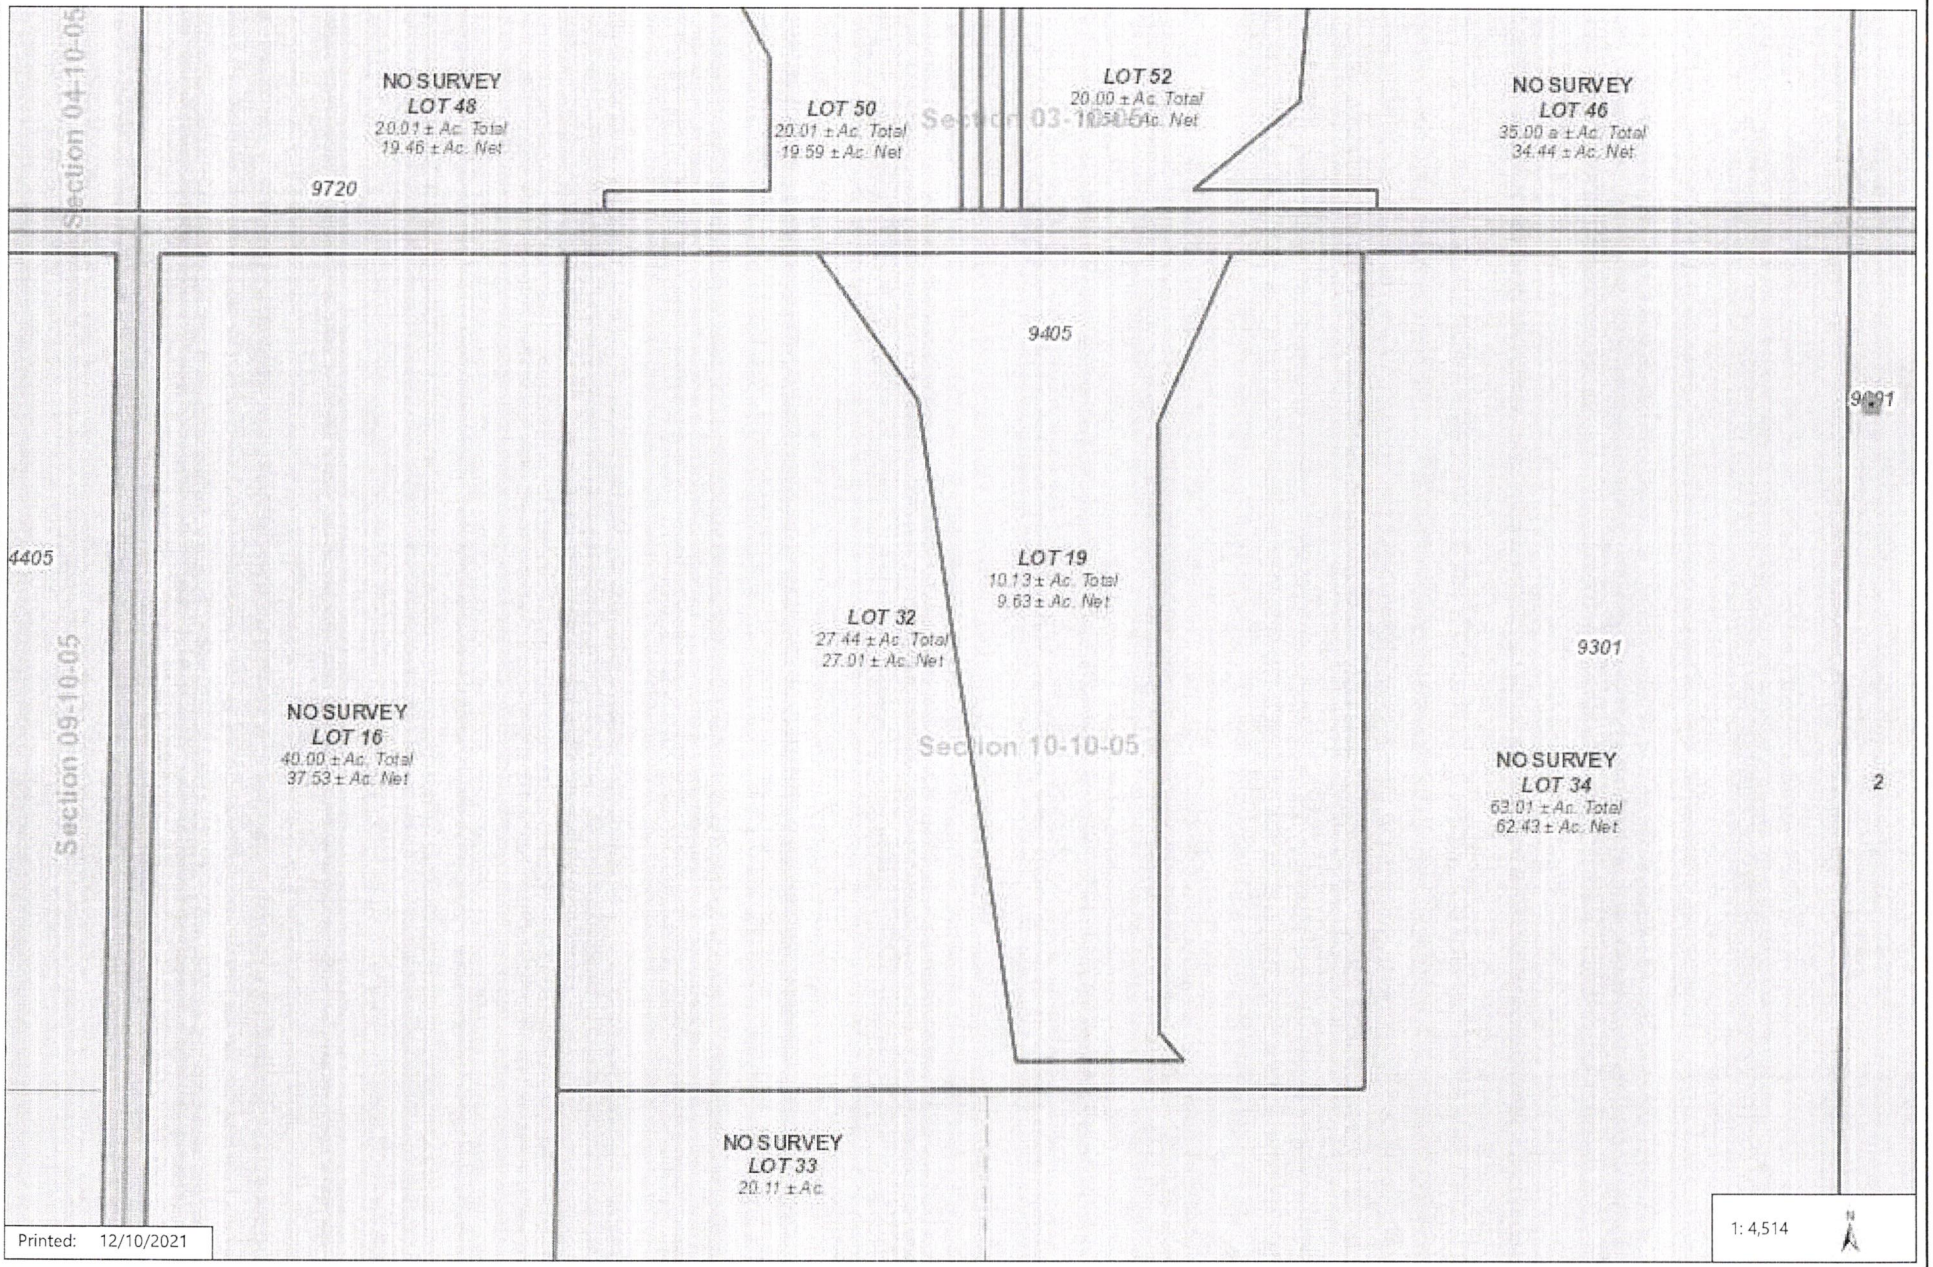

Printed: 12/10/2021

1: 4,514

N

Disclaimer: The information is presented on a best-efforts basis, and should not be relied upon for making financial, survey, legal or other commitments. If you have questions or comments regarding the data displayed on this map, please email assessor@lancaster.ne.gov and you will be directed to the appropriate department.

SCANNED