LINCOLN-LANCASTER COUNTY HEALTH DEPARTMENT

FILE NO. 1316-C

INDIVIDUAL SEWAGE SYSTEM CONSTRUCTION — TYPE OF PERMIT

November 12, 1978 — THIS PERMIT EXPIRES

Dave Griffiths — ISSUED TO

3426 O Street, Lincoln, NE — ADDRESS

T9N, R5E, Section 8 — LEGAL DESCRIPTION

REMARKS: NON-TRANSFERABLE

PERMIT	INSPECTION FEE	OCCUPATION TAX	TOTAL
$ 30.00	$	$	$ 30.00
ACCOUNTING NO.	ACCOUNTING NO.	ACCOUNTING NO.	CODE
	110.16	148.14	6-2

RECEIPTED BY	DATE	AMOUNT

VALID RECEIPT ONLY IF RECEIPTED IN THIS SPACE

HEALTH — ISSUING OFFICER

THIS PERMIT IS ISSUED AS PROVIDED BY COUNTY RESOLUTION NO. 2832

20109-0977

FORM 20103-0477
REQUEST FOR SITE CLEARANCE AND PERMIT
FOR INDIVIDUAL SEWAGE DISPOSAL SYSTEM
City Ordinance No. 9150 ☐
County Resolution No. 2832 ☒

LINCOLN-LANCAS COUNTY HEALTH DEPARTMENT
Division of Environmental Health
2200 St. Marys Avenue
Lincoln, Nebraska 68502
Phone: 474-1541

A

FILING FEE: $ 30 00

FILE NO. 1316-C

DATE: 5-11-78

The undersigned hereby requests SITE CLEARANCE and PERMIT to construct an Individual Sewage Disposal System in conformance with appropriate resolution or ordinance, as described herein:

1. Legal description of property: Twp. 9N ; Range 5E ; Section 8 ; Block _____ : Lot 81.I. : Addition SEE ATTACHED
   Street Address _____

2. Property Use: Residential ☒ ; Commercial ☐ Other Use ☐
   No. of Bedrooms ~~2~~ . Describe _____
   ~~Changed to 2 as informed by Robert Williams~~

3. Type of Individual Sewage Disposal System: Septic Tank ☒ ; Other ☐

4. Distance to public sewer: _____ ft.

Dave Griffith
Signature of Applicant (Owner or Lessee)

3476 Ont
Address

(Do not write below this double line)

1. Health Department: Date Rec'd. 5/12/78. Date Frwd. 5/12/78. ACTION: Approved ☒ Disapproved ☐ Signature: Jerrold C. Reed

2. Supt. Bldg. Insp.: or Village Clerk Date Rec'd. _____. Date Frwd. 5-12-78. ACTION: Approved ☐ Disapproved ☐ Signature: Brent W Jensen

3. City or County Engineer: Date Rec'd. 5-12-78. Date Frwd. 5-12-78. ACTION: Approved ☑ Disapproved ☐ Signature: Henry Graff

REMARKS OR REASONS FOR DISAPPROVAL _____

Site Visits:
Date: 9/28/78 by: J.C.H.
Date: _____ by: _____
Date: _____ by: _____

INSTALLATION FINAL WRITTEN APPROVAL
Date: 10-13-78 By: Ron Mynatt

White: Health Dept. Copy
Yellow: Engineers Copy
Pink: Bldg. Inspector's Copy

FORM 20105-0477
SOIL ABSORPTION TEST DATA REPORT
(Annex to Application)
(Reference: City Ordinance No. 9150 and County Resolution No. 2832)

LINCOLN-LANCASTER COUNTY HEALTH DEPARTMENT
Division of Environmental Health
2200 St. Marys Avenue
Lincoln, Nebraska 68502
Phone: 474-1541

B

FILE NO. 1316-C

PROPERTY WHERE SOIL TESTED:

Location: Township 9N; Range 5E; Section & ¼ Section 8.
Property Dimensions: _____ ft. x _____ ft. Area: _____ acres. (Attach Sheet C with sketch of property).
Soil Type: Silty Clay ☐; Silty Clay Loam ☒; Sandy Loam ☐; Silt Loam ☐; Clay Loam ☐.
Dates of Tests: 5-9-78 to 5-10-78. Weather: Precip. No Temp. 70.

OWNER: Dave Griffiths
Address: 3426 Ost

PERCOLATION TEST DATA TABLE

a.	b.	c.	d.	e.	f.	g.	h.	i.	j.	k.	l.	m.	n.
		Pre-Saturation Period				Percolation Readings						Results	
		Start		End		Start			End				
Hold No.	Hole Depth (in.)	Date (Mo./Day)	Time (Hr./Min.)	Date (Mo./Day)	Time (Hr./Min.)	Date (Mo./Day)	Time (Hr./Min.)	Water Level (in.)	Time (Hr./Day)	Water Level (in.)	Elapsed Time (Min.)	Water Level Drop (in.)	Percolation Rates (Min./in.)
1	24	5-9	1	5-9	5	5-10	3	6	4	4 3/4	60	1 1/4	
2	"									4 3/4		1/4	
3	"									4 7/8		1/8	
4	"									5		1	
5	"									4 3/4		1/4	
6	"									4 7/8		1/8	

Sum of Percolation Rates: _____
Average of Rates: _____
Mean of Rates: _____

Sanitek Svc Co.
Signature of Person Conducting Test

Address 2425 Ast Phone 475-1086

(Do not write below this line)

REVIEWING ACTION

Remarks: _____
Soil Type (SCS): Wymore Silty Clay Loam
Date: May 12, 1978
Confirmed 9/28/78

Approved Percolation Rate (a)
A. 51 min./inch
B. _____ min./inch
C. _____ min./inch

Jerrold C. Hood
Signature of Reviewing Official

FORM 20104-0477
PLANS & SPECIFICATIONS FOR SEWAGE DISPOSAL SYSTEM (Annex to Application)
City Ordinance No. 9150 ☐
County Resolution No. 2832 ☐

LINCOLN-LANCASTER COUNTY HEALTH DEPARTMENT
Division of Environmental Health
2200 St. Marys Avenue
Lincoln, Nebraska 68502
Phone: 474-1541

D

DATE: _____

FILE NO. 1316-C

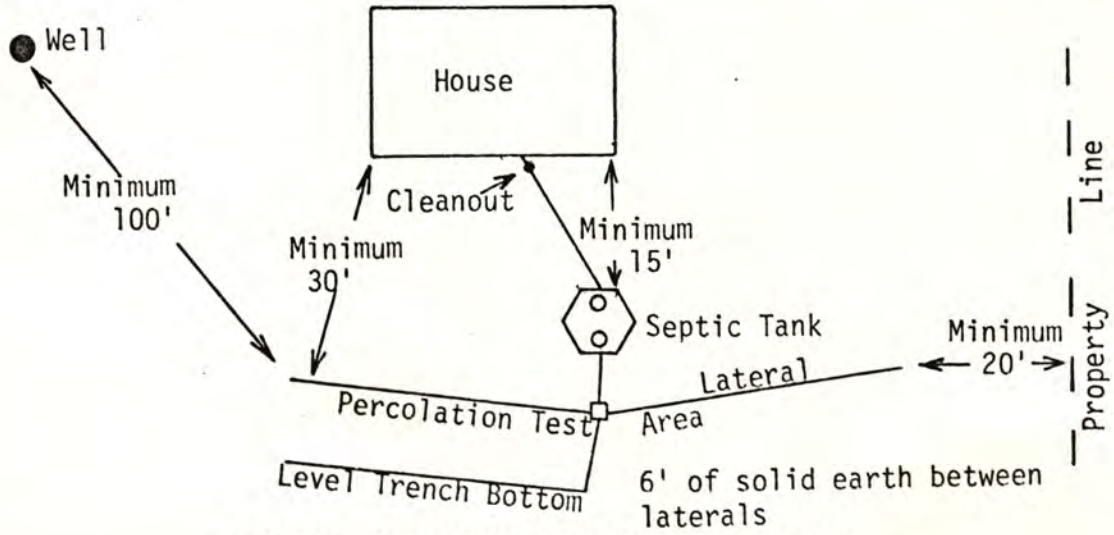
SPECIFICATIONS AS BUILT

A. BUILDING SEWER:
1. Material Pla ; Diameter 4 in.
2. Distance above basement floor _____ in., or below basement floor 14 in.
3. Distance between dwelling and septic tank _____ ft.
4. Number of clean-outs 0 .
5. Distances to:
Well or Suction Line 100 ft.; Stream _____ ft.; Pressure Line _____ ft.; Property Line _____ ft.

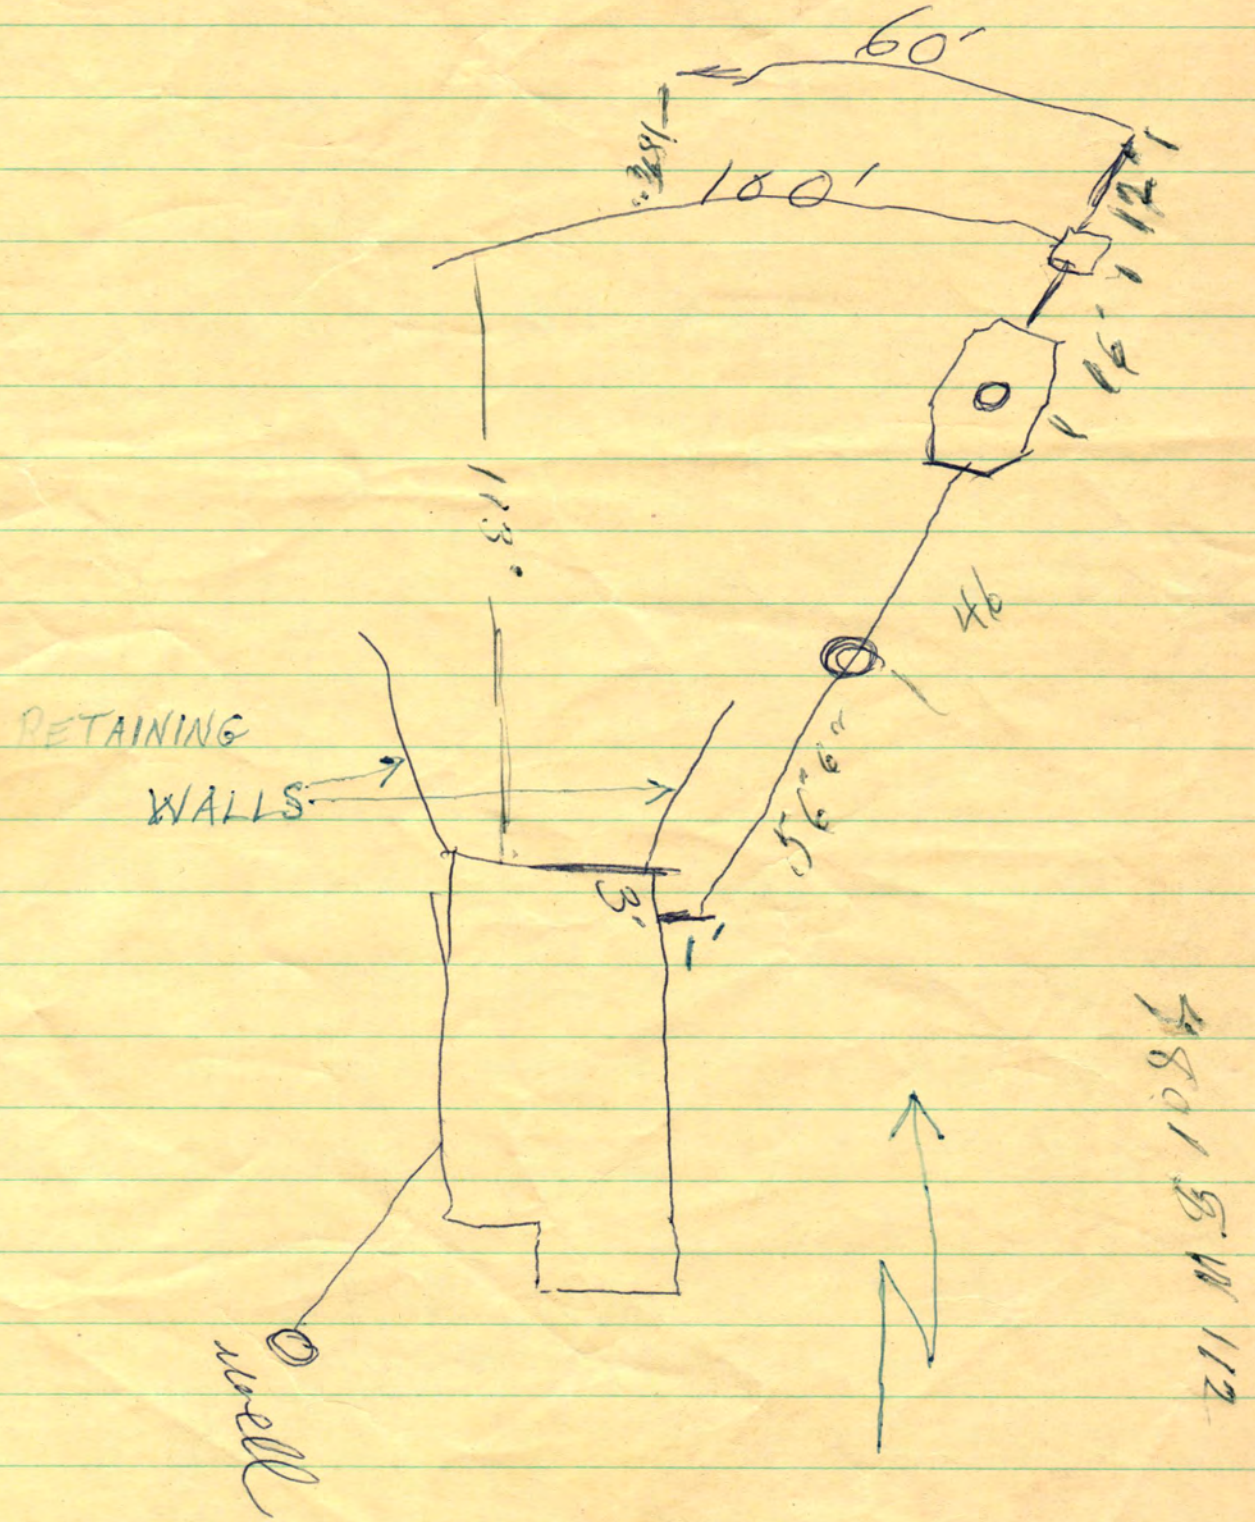
B. SEPTIC TANK:
1. Material Conc ; No. of compartments 1 .
2. Capacity 1000 gals.;
3. Factory Built: Yes ☒ No ☐
(Company Pre Cast)
4. Manholes: Over Inlet; diam. 22 in.
Over Outlet; diam. _____ in.
Riser Above ☐ Below ☐ Grade ___ in.
5. Inlet: Baffle ☐ ; or Tee ☐
6. Outlet: Baffle ☐ ; or Tee ☐
7. Depth of top of tank below finished grade 8 in.
8. Distances to:
Well or Suction Line 70 ft.; Stream _____ ft.; Pressure Line _____ ft.; Property Line _____ ft.

C. DISTRIBUTION BOX:
1. Material Pla ; Number - available outlets 7 .
2. Factory Built: Yes ☒ No ☐
(Company Hand Cave)
3. Distance from Septic Tank 10 ft.

D. ABSORPTION FIELD: (Provide as built drawings on back of this form)
1. Type: Half Rounds ☐ Perforated Pipe ☒
Diameter of Half Round _____ or Perforated Pipe 4 .
Material: fiberglass ☐ ; plastic ☒ ; concrete ☐ ; other _____ .
2. Lateral Lines:
Number ___ ; Length of each line 100, 100, 100, 10, _____ ft.;
Total length of laterals 310 ft.;
Distance between lateral lines _____ ft.
3. Trench dimensions: Width 36 ft.;
Slope 2 in/100 ft.; Average Depth 22 in.
4. Filter Material: Road Gravel
Depth of Material 12 in.
5. Distances to:
Well or Suction Line _____ ft.; Stream _____ ft.; Pressure Line _____ ft.; Property Line _____ ft.



TYPICAL INDIVIDUAL SEWAGE SYSTEM DESIGN


60'
100'
133'
RETAINING
WALLS
3'
well
N

LINCOLN-LANCASTER COUNTY HEALTH DEPARTMENT

ENVIRONMENTAL HEALTH DIVISION

2200 St. Marys Ave. Lincoln, NE 68502-3785 (402) 471-8000

NON TRANSFERABLE

PERMIT

Permit
SEWAGE SYSTEM REPAIR

No. 93390031801

Issued 03/03/93
Expires 09/03/93
Revenue Code 18754

Establishment
DONALD BRUNKEN
T9N R5E SEC 8
LOT 45

FEES: $50.00

TOTAL $50.00

Permittee
DONALD BRUNKEN
6710 N 7 ST
LINCOLN NE 68531-8935

Issued By M. Jane Ford
Health Director

THIS LICENSE OR PERMIT IS ISSUED SUBJECT TO REVOCATION AS PROVIDED BY LAW
"POST IN A PROMINENT PLACE"

FORM HD-41(73) APPLICATION FOR PERMIT TO ALTER, EXTEND OR REPAIR INDIVIDUAL SEWAGE DISPOSAL SYSTEM

City Ordinance No. 9150 ☐
County Resolution No. 2832 ☒

LINCOLN-LANCASTER COUNTY HEALTH DEPARTMENT
Division of Environmental Health
2200 St. Marys Ave.
Lincoln, Nebraska 68502 (Phone: 471-7800)

FILE NO. _____

TO: Division of Environmental Health
Lincoln-Lancaster County Health Dept.

DATE: March 1, 1993

The undersigned hereby applies for a permit to ALTER ☐, EXTEND ☐, or REPAIR ☐ an existing Individual Sewage Disposal System, in conformance with appropriate Ordinance or Resolution, as described in this application and drawings attached hereto.

1. Legal description of property: Twp. 9N ; Range 5E ; Section 8 ;
Block _____ ; Lot 45 I.T. ; Addition _____
Street Address _____

2. Property Use: Residential X ☐; Commercial _____ ☐
No. Bedrooms _____ Describe _____
Other Use ☐
Describe _____

3. Type of existing Individual Sewage Disposal System: Septic Tank ☐; Other ☐

4. Description of proposed alteration, extension or repair: Add 100 FT LATERAL
18" wide trench, 18" of gravel below perf pipe

5. Work to be done by: Owner ☐ ; or Contractor ☒, SINTEK SERVICE
Contractor's Name

6. Estimated cost of project:

a. Materials	$
b. Labor	$
c. Other	$
TOTAL over contract	$ 400.

OWNER
DONALD BRUNKEN

CONTRACT - SINTEK SERVICE

Signature of Applicant (owner or lessee)

6710 NORTH 7TH STREET.
Address LINCOLN, NEBRASKA 68531

(Do not write below this line)

REVIEWING ACTION

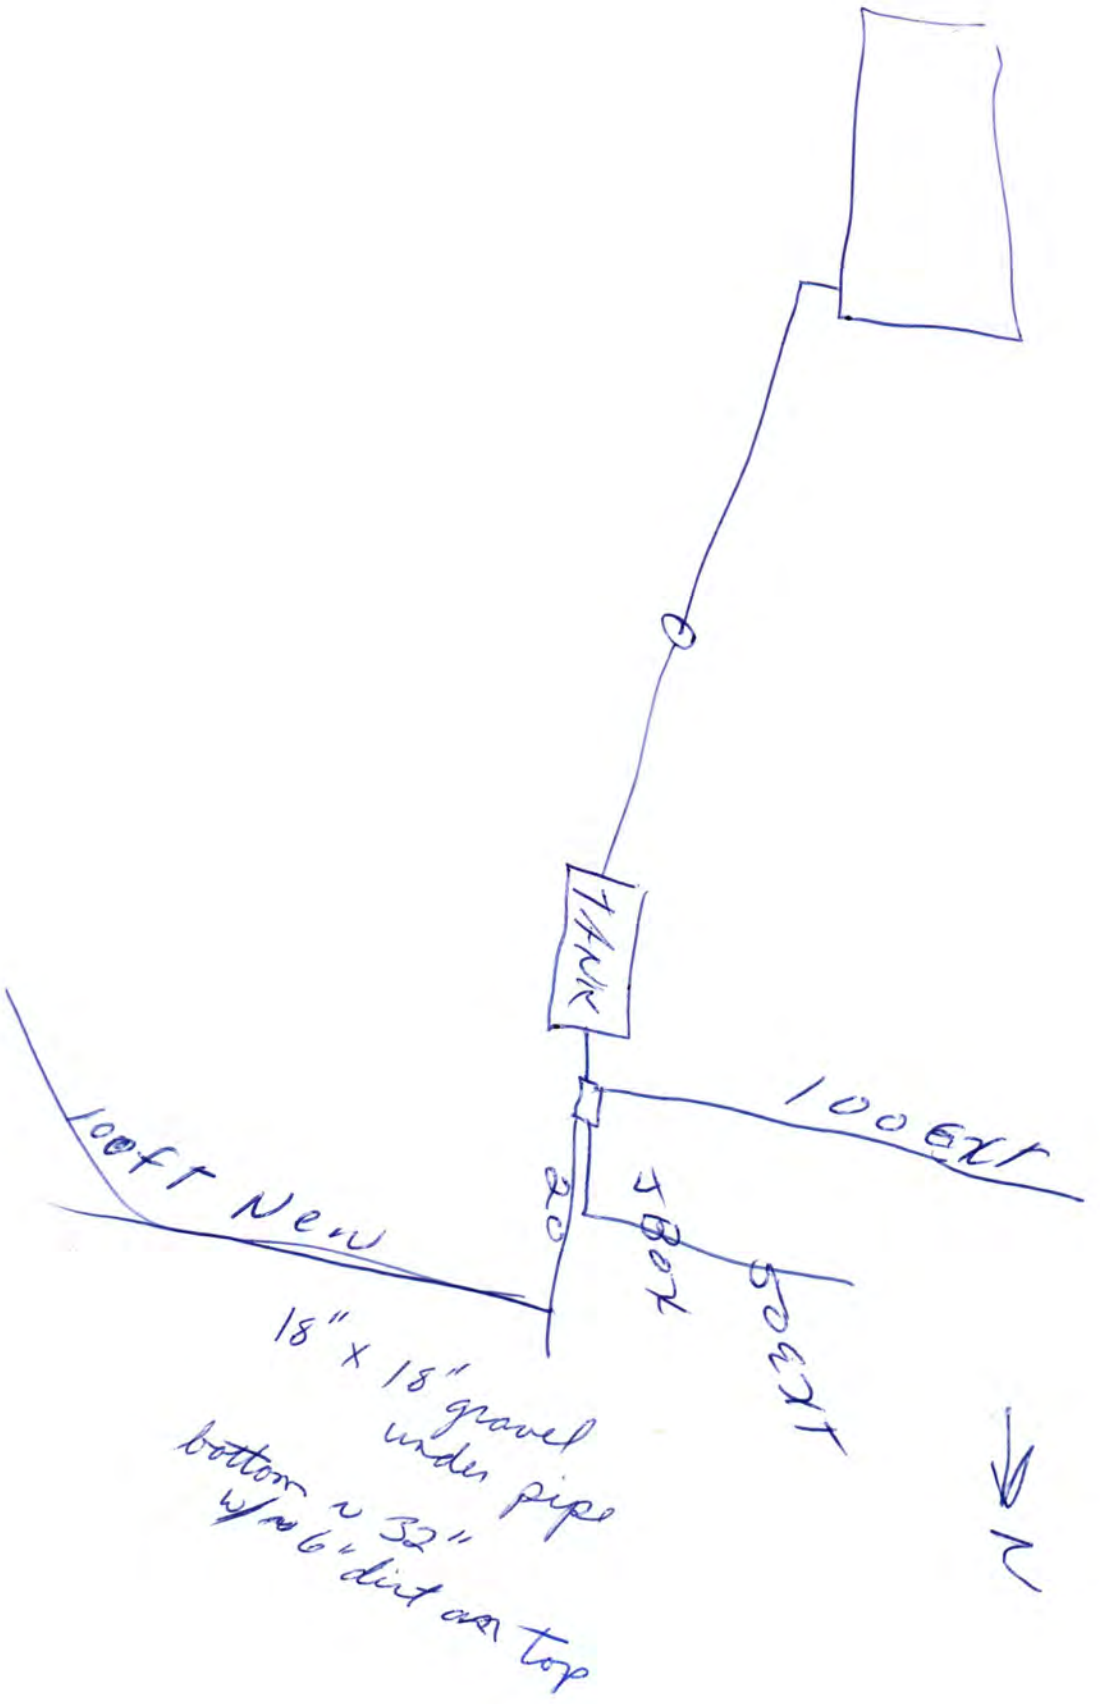
1. Date Rec'd: 3/1/93
Filing Fee: $ 50.00

2. Site Visits:
Date: 3/1/93 by: Joyce Jensen
Date: _____ by: _____
Date: _____ by: _____

3. Date: Approved ☒ ; Disapproved ☐
by: Jerrold C. Hood

4. INSTALLATION FINAL WRITTEN APPROVAL
Date: 3/1/93 by: JH

provisional - pipe covered as installed - not observed


TANK
100 ft
100 ft New
20
40 ft
40 ft
18" x 18" gravel under pipe
bottom ~ 32"
w/ ~ 6" dirt on top
N
Alteration 1992/1993