LINCOLN-LANCASTER COUNTY HEALTH DEPARTMENT

Division of Environmental Health
2200 St. Marys Ave Lincoln, NE 68502 (402) 471-8000

NON TRANSFERABLE

PERMIT

SEWAGE INSTALLATION

No. 92380081901

Issued 04/09/92
Expires 10/09/92

ESTABLISHMENT

MICHAEL BRANTING
T9N R6E SEC 16
PESTER RIDGE ESTATES BLK 3 LOT 1

FEES: Permit 018754 $150.00

Total $150.00

Issued By COUNTY HEALTH

PERMITTEE

MICHAEL BRANTING
4001 HOLLY RD
LINCOLN NE 68502

VALID RECEIPT ONLY IF RECEIPTED IN THIS SPACE	
DATE	AMOUNT
4/10/92	PAID

THIS LICENSE OR PERMIT IS ISSUED SUBJECT TO REVOCATION AS PROVIDED BY LAW

FORM 20103-0477
REQUEST FOR SITE CLEARANCE AND PERMIT
FOR INDIVIDUAL SEWAGE DISPOSAL SYSTEM
City Ordinance No. 9150 ☒
County Resolution No. 2832 ☐

LINCOLN-LANCASTER COUNTY HEALTH DEPARTMENT
Division of Environmental Health
2200 St. Marys Avenue
Lincoln, Nebraska 68502
Phone: 471-7800

A

FILING FEE: $_____

FILE NO._____

DATE: 4-8-92

The undersigned hereby requests SITE CLEARANCE and PERMIT to construct an Individual Sewage Disposal System in conformance with appropriate resolution or ordinance, as described herein:

1. Legal description of property: Twp. 9N ; Range 6E ; Section 16 ;
   Block 3 : Lot 1 : Addition Pester Ridge Estates
   Street Address 6700 SW 25th

2. Property Use: Residential ☒ ; Commercial ☐ Other Use ☐
   No. of Bedrooms 3 . Describe_____

3. Type of Individual Sewage Disposal System: Septic Tank ☒ ; Other ☐

4. Distance to public sewer: _____ft. WILL INSTALL WHAT SOIL PERCOLATION TEST INDICATES

Michael B Brantner
Signature of Applicant (Owner or Lessee)

4001 Holly Rd Lincoln NE 68502
Address

(Do not write below this double line)

1. Health Department: Date Rec'd. 4/8/92. Date Frwd. 4/9/92. ACTION: Approved ☒ Disapproved ☐ Signature: Jerrold C. Hood

2. Supt. Bldg. Insp.: or Village Clerk Date Rec'd. 4/9/92. Date Frwd. 4/9/92. ACTION: Approved ☐ Disapproved ☐ Signature:_____

3. City or County Engineer: Date Rec'd._____. Date Frwd._____. ACTION: Approved ☒ Disapproved ☐ Signature:_____

REMARKS OR REASONS FOR DISAPPROVAL need drawings

Site Visits:
Date: 9-15-92 by: JR
Date: 9-17-92 by: JR
Date:_____ by:_____

White: Health Dept. Copy
Yellow: Engineers Copy
Pink: Bldg. Inspector's Copy

INSTALLATION FINAL WRITTEN APPROVAL
Date: 9/28/92 By: JR

Drawings rec

FORM 23-43

FORM 20104-0477
PLANS & SPECIFICATIONS FOR SEWAGE DISPOSAL SYSTEM (Annex to Application)
City Ordinance No. 9150 ☐
County Resolution No. 2832 ☐

LINCOLN-LANCASTER COUNTY HEALTH DEPARTMENT
Division of Environmental Health
2200 St. Marys Avenue
Lincoln, Nebraska 68502
Phone: 471-7800

D

DATE: 9-24-92

FILE NO: _____


SPECIFICATIONS AS BUILT

A. BUILDING SEWER:
1. Material PVC ; Diameter 4 in.
2. Distance above basement floor _____ in., or below basement floor 18 in.
3. Distance between dwelling and septic tank 70 ft.
4. Number of clean-outs None .
5. Distances to:
Well or Suction Line 100+ ft.; Stream 100+ ft.; Pressure Line 100+ ft.; Property Line 100+ ft.

B. SEPTIC TANK:
1. Material Concrete ; No. of compartments 1 .
2. Capacity 1000 gals.;
3. Factory Built: Yes ☒ No ☐
(Company American Concrete)
4. Manholes: Over Inlet; diam. 16 in.
Over Outlet; diam. 6 in.
Riser Above ☐ Below ☒ Grade 16 in.
5. Inlet: Baffle ☒ ; or Tee ☐
6. Outlet: Baffle ☒ ; or Tee ☐
7. Depth of top of tank below finished grade 16 in.
8. Distances to:
Well or Suction Line 100+ ft.; Stream 100+ ft.; Pressure Line 100+ ft.; Property Line 100+ ft.

C. DISTRIBUTION BOX:
1. Material Concrete ; Number available outlets 5 .
2. Factory Built: Yes ☒ No ☐
(Company American Concrete)
3. Distance from Septic Tank 11 ft.

D. ABSORPTION FIELD: (Provide as built drawings on back of this form)
1. Type: Half Rounds ☐ Perforated Pipe ☒
Diameter of Half Round _____ or Perforated Pipe 4" .
Material: fiberglass ☐ ; plastic ☒ ; concrete ☐ ; other _____ .
2. Lateral Lines:
Number 2 ; Length of each line 100 , 100 , _____ , _____ , _____ ft.;
Total length of laterals 200 ft.;
Distance between lateral lines _____ ft.
3. Trench dimensions: Width 8 ft.;
Slope 6 in/100 ft.; Average Depth 36 in.
4. Filter Material: Gravel
Depth of Material 30 in.
5. Distances to:
Well or Suction Line 100+ ft.; Stream 100+ ft.; Pressure Line 100+ ft.; Property Line 100+ ft.

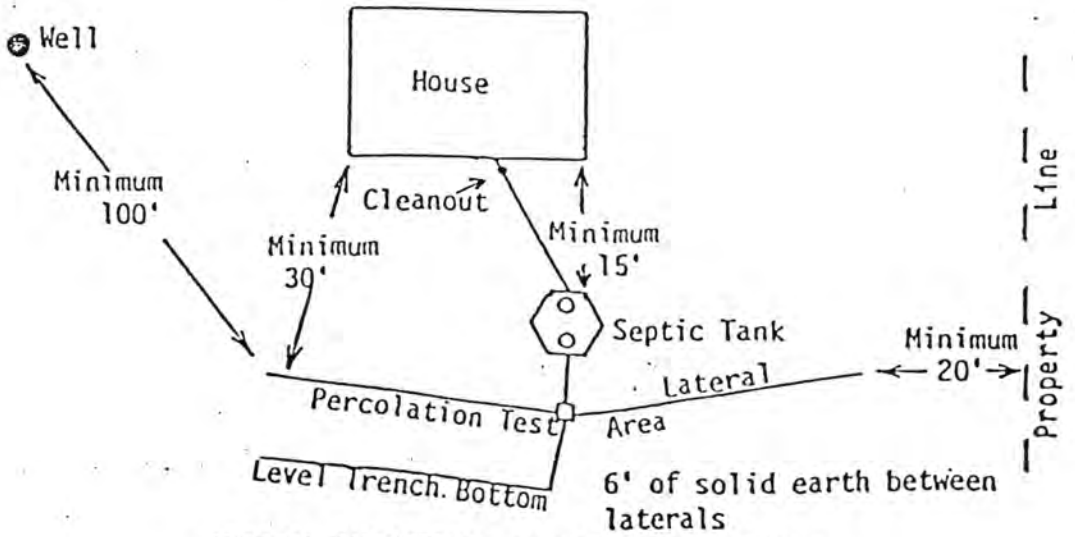


TYPICAL INDIVIDUAL SEWAGE SYSTEM DESIGN

Installed By Vogt TAT Excavating

Perez Const.

SW 25th

Pester Estates

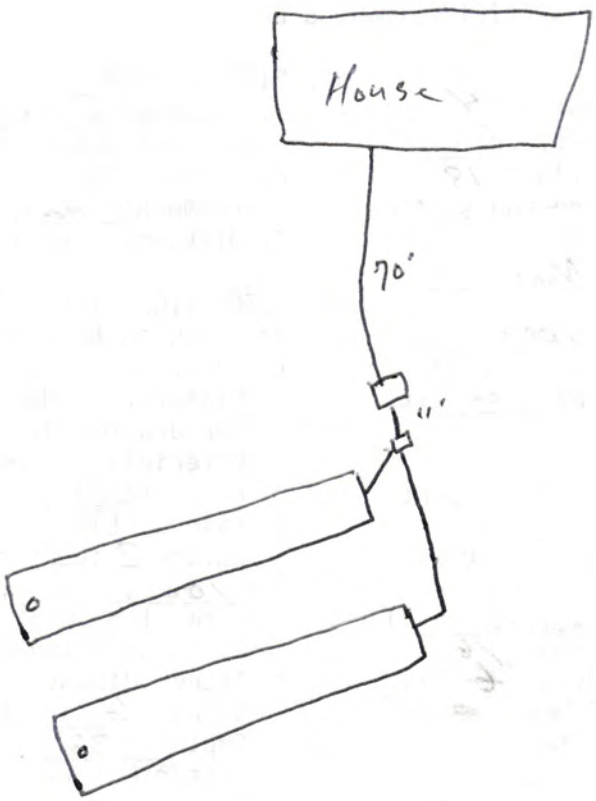

N →

4-6 14 BL GP