FILE NO. 280

CITY OF LINCOLN NEBRASKA

DEPARTMENT OF LICENSES AND PERMITS

INDIVIDUAL SEWAGE SYSTEM CONSTRUCTION — TYPE OF LICENSE OR PERMIT

December 29, 1972 — THIS LICENSE OR PERMIT EXPIRES

Douglas Kirchhoff — LICENSEE OR PERMITTEE

4045 South 52nd — ADDRESS

T9N; R7E; Section 24 NW 1/4-NW 1/4 — NAME OF ESTABLISHMENT, IF ANY

LEGAL DESCRIPTION — ADDRESS

REMARKS: Non-Transferable

PERMIT	INSPECTION FEE	OCCUPATION TAX	LICENSE	TOTAL
$ 30.00	$	$	$	$ 30.00

ACCOUNTING NO.	ACCOUNTING NO.	ACCOUNTING NO.	CODE
110.15 624-1535	110.16	148.14	6-2

SERIAL NO.	DATE	AMOUNT

VALID RECEIPT ONLY IF MACHINE RECEIPTED IN THIS SPACE

APPLICATION

THIS LICENSE OR PERMIT IS ISSUED SUBJECT TO REVOCATION AS PROVIDED BY LAW

FORM HD-30(67) REQUEST FOR SITE CLEARANCE FOR INDIVIDUAL SEWAGE DISPOSAL SYSTEM
City Ordinance No. 9150

LINCOLN-LANCASTER COUNTY HEALTH DEPARTMENT
Division of Environmental Health
2200 St. Marys Avenue
Lincoln, Nebraska 68502 (Phone: 432-7611)

FILE NO. 280

TO: Division of Environmental Health
Lincoln-Lancaster County Health Dept.

The undersigned hereby requests SITE CLEARANCE to construct an Individual Sewage Disposal System in conformance with Lincoln City Ordinance No. 9150, as described herein:

1. Legal description of property: Twp. 9N; Range 7E; Section 24 NW¼-NW¼
Block ____; Lot ____; Addition ____;
Street Address ____.

2. Property Use: Residential ____ ☑; Commercial ____ ☐
No. of Bedrooms 3. Describe: ____
Other Use ____ ☐
Describe: ____

3. Type of Individual Sewage Disposal System: Septic Tank ☑; Other ☐

4. Distance to public sewer: NONE ft.

Douglas H. Kirchhoff
Signature of Applicant (owner or lessee)

4045 So. 52
Address

(Do not write below this double line)

REVIEWING ACTION

1. Health Department: Date Rec'd. 6/28/72. Date Frwd. 6/29/72. ACTION: Approved ☐ Disapproved ☒ Signature: Jerrold C. Hood


2. Supt. Bldg. Insp.: Date Rec'd. 6/29/72. Date Frwd. 6/29/72. ACTION: Approved ☐ Disapproved ☒ Signature: Charles Seals By BS.

3. City Engineer: Date Rec'd. 6-29-72. Date Frwd. " . ACTION: Approved ☐ Disapproved ☒ Signature: J. L. Blessing

REMARKS OR REASONS FOR DISAPPROVAL ____

FINAL ACTION ON SITE CLEARANCE: Approved ☐ Disapproved ☐

Date Applicant Notified: ____ Signature ____

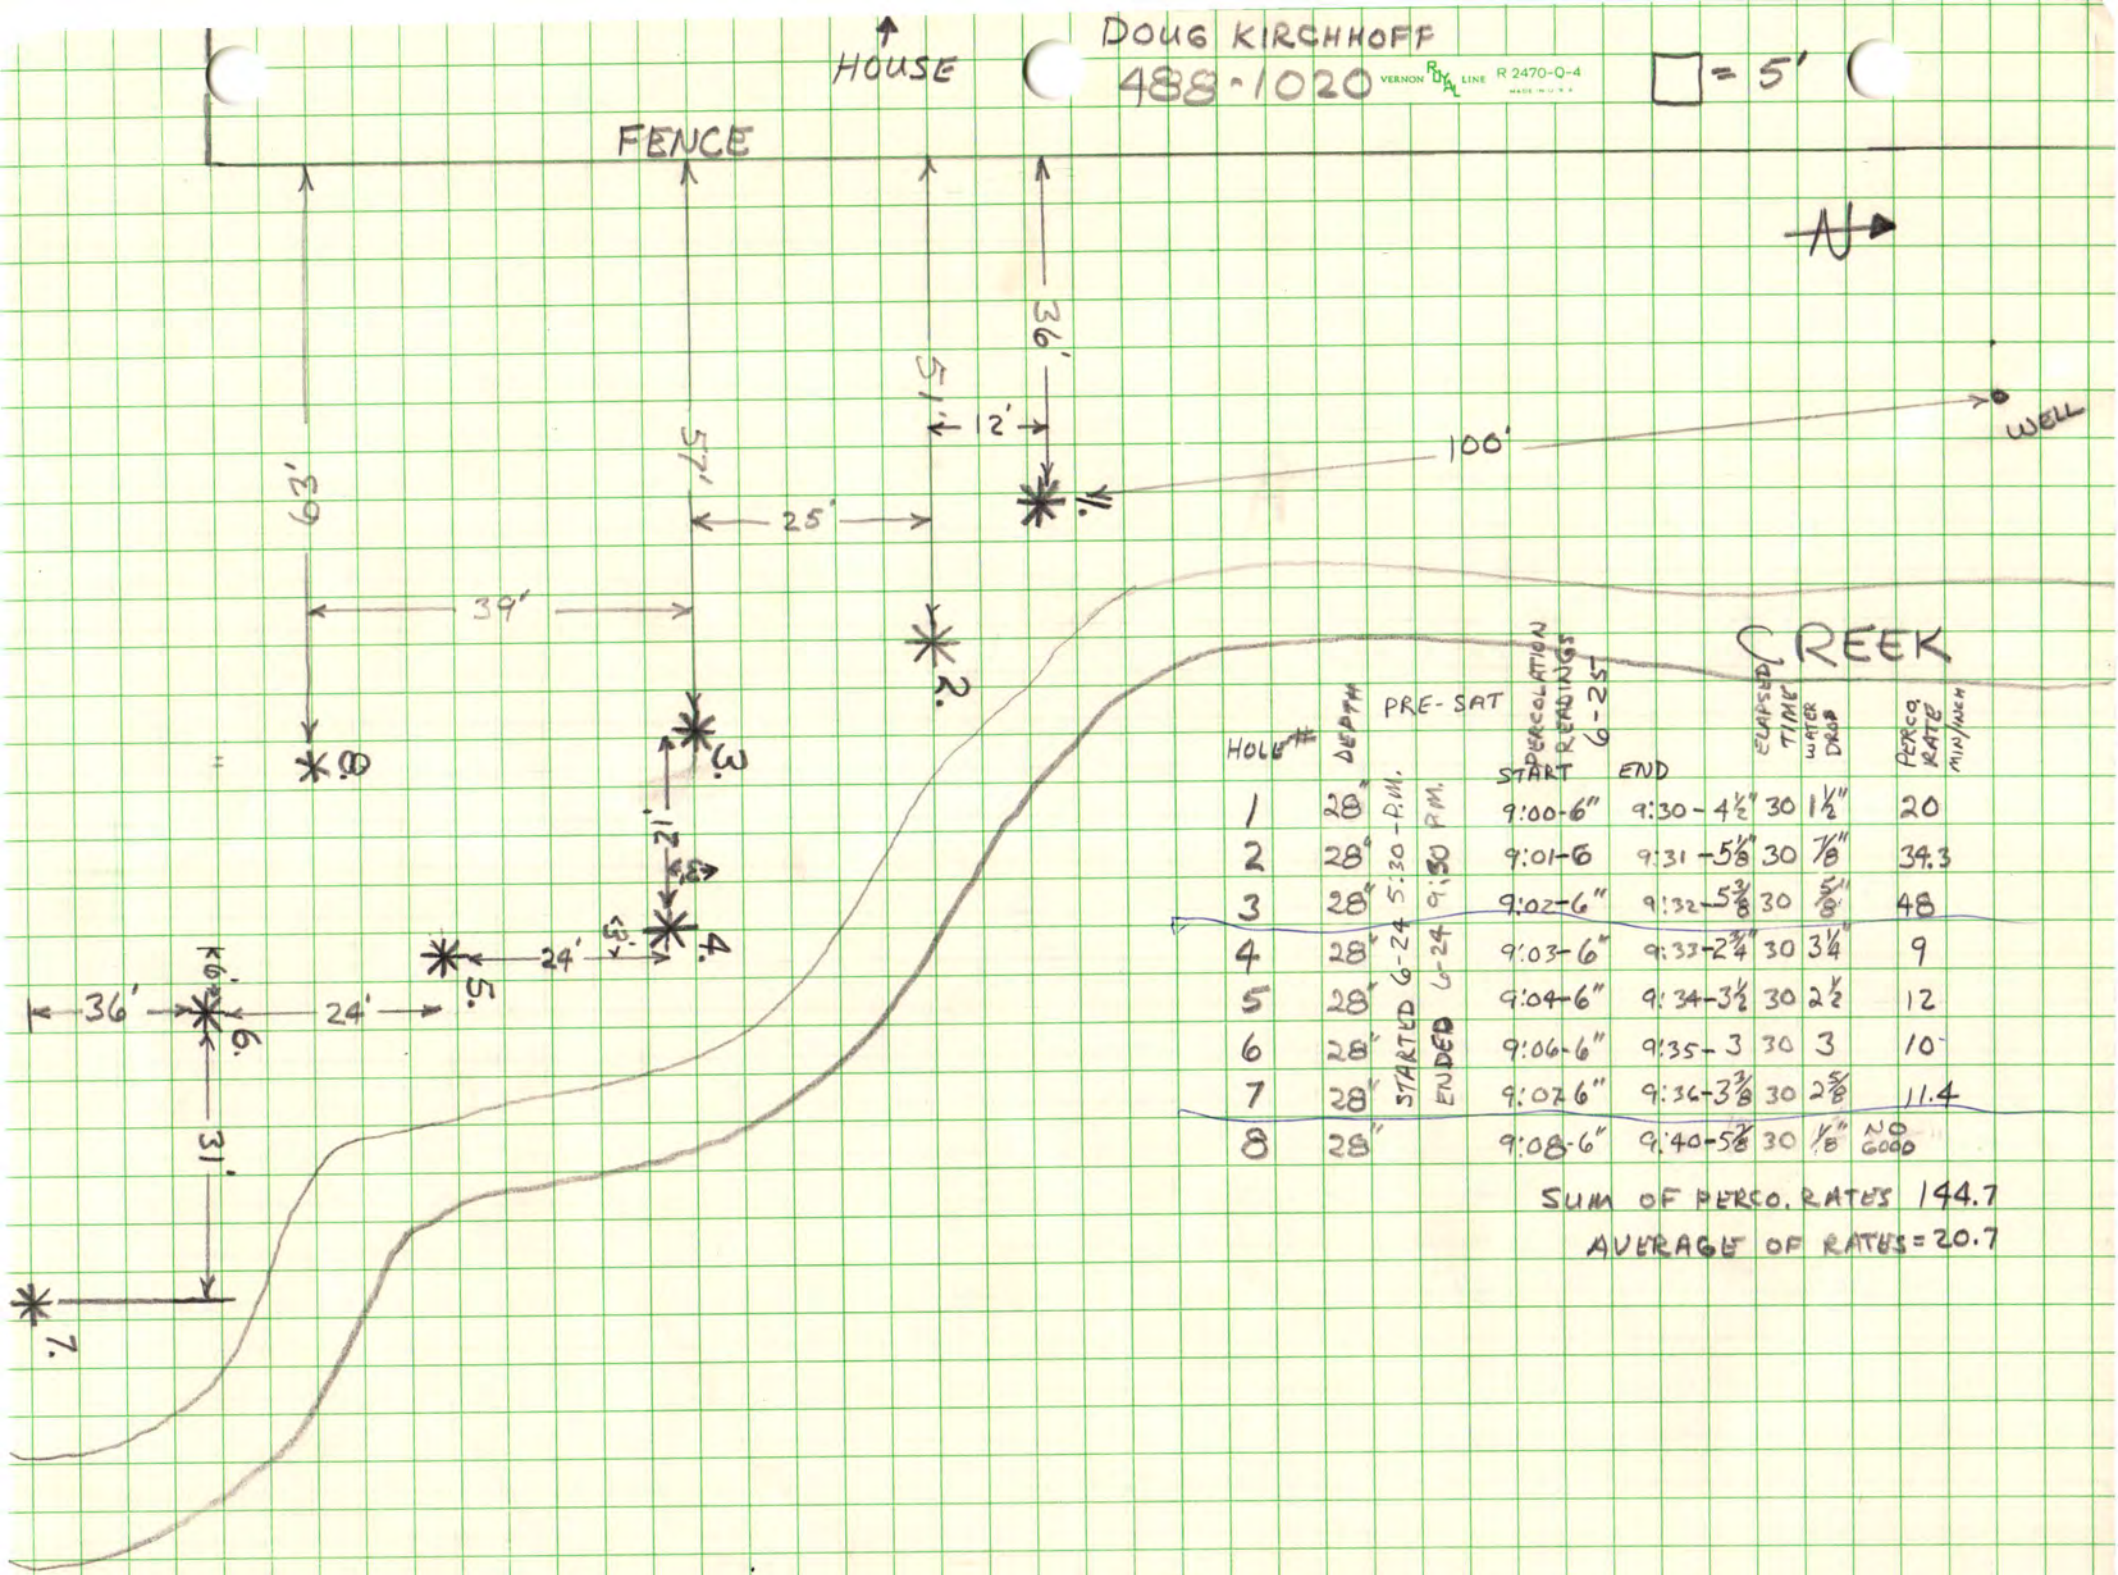


HOLE #	DEPTH	PRE-SAT	PERCOLATION READINGS 6-25 START	END	ELAPSED TIME	WATER DROP	PERCO RATE MIN/INCH
1	28"	5:30 P.M.	9:00-6"	9:30 - 4½"	30	1½"	20
2	28"		9:01-6	9:31 -5⅛"	30	⅞"	34.3
3	28"	9:30 P.M.	9:02-6"	9:32-5⅜"	30	⅝"	48
4	28"	STARTED 6-24	9:03-6"	9:33-2¾"	30	3¼"	9
5	28"		9:04-6"	9:34-3½	30	2½	12
6	28"	ENDED 6-24	9:06-6"	9:35-3	30	3	10
7	28"		9:07 6"	9:36-3⅜	30	2⅝	11.4
8	28"		9:08-6"	9:40-5⅞	30	⅛"	NO GOOD

SUM OF PERCO. RATES 144.7

AVERAGE OF RATES = 20.7

DOUG KIRCHHOFF
1/8" = 10'

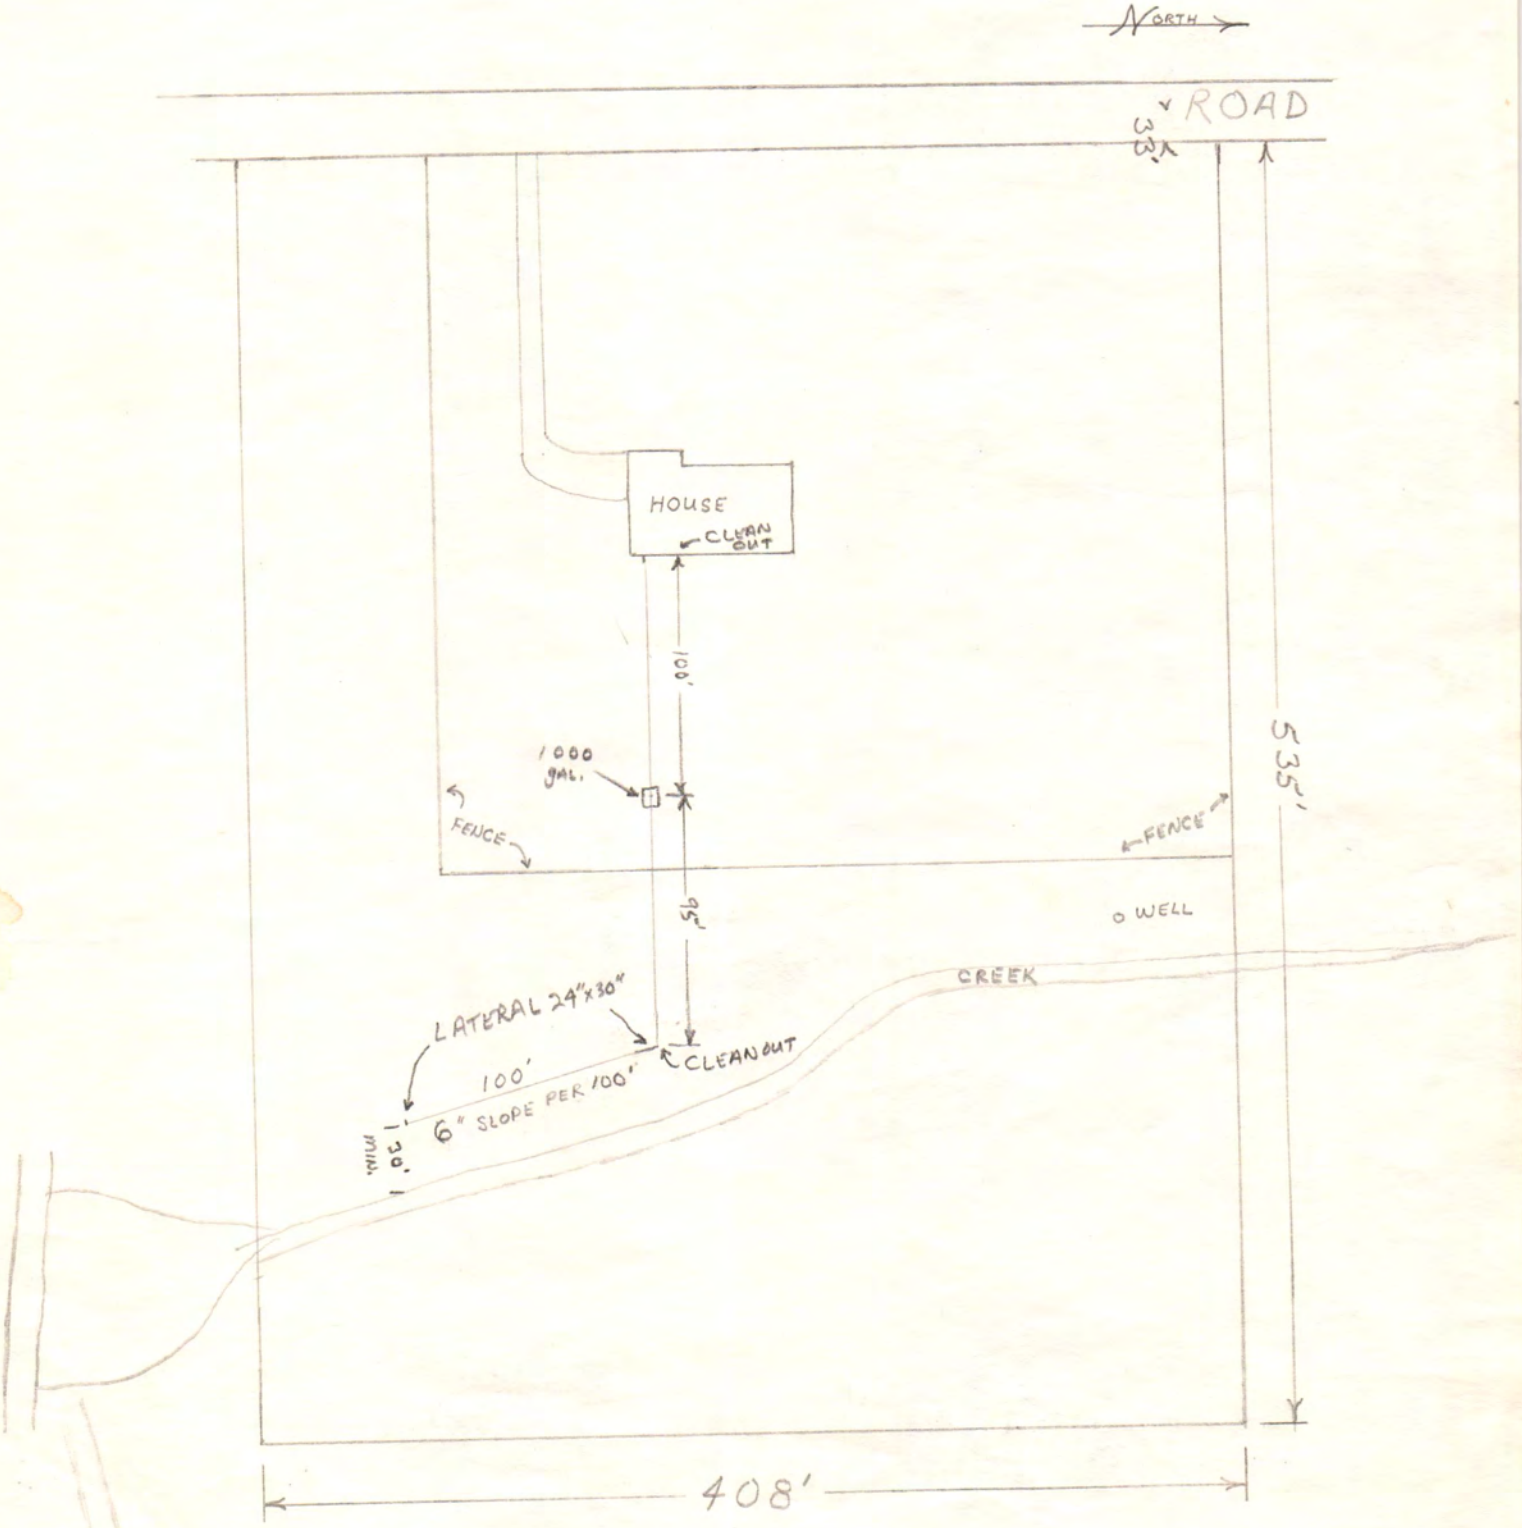

FORM HD-32a(67) PLANS & SPECIFICATIONS
SEWAGE DISPOSAL SYSTEM
(Annex to Application)
Ordinance No. 9150

LINCOLN-LANCASTER COUNTY HEALTH DEPARTMENT
Division of Environmental Health
2200 St. Marys Avenue
Lincoln, Nebraska 68502 (Phone: 432-7611)

FILE NO. 280

SPECIFICATIONS

DATE: _____


A. BUILDING SEWER:
1. Material PLASTIC; Diameter 4 in.
2. Distance above basement floor 12 in.; or below basement floor ___ in.
3. Distance between dwelling and septic tank 98 ft.
4. Number of clean-outs ONE.
5. Distances To:
Well or Suction Line 50 ft.;
Stream 40 ft.; Pressure Line 50 ft.;
Property Line 160 ft.

B. SEPTIC TANK (Provide construction drawings.)
1. Material FIBERGLASS; No. of compartments ONE.
2. Capacity 100 gals.; Liquid depth 48 in.
3. Factory Built: Yes ☑ (Company CORR-A-)GLASS
No ☐
4. Manholes: Over Inlet; diam. 16 in.
Over Outlet; diam. ___ in.
Below Grade 16 in.
5. Inlet: Baffle ☑; or Tee ☐
6. Outlet: Baffle ☑; or Tee ☐
Depth of outlet below inlet 4 in.
7. Depth of top of tank below finished grade 12 in.
8. Distances To:
Well or Suction Line 100+ ft.;
Stream 30 ft.; Pressure Line 200 ft.;
Property Line 170 ft.

C. DISTRIBUTION BOX
1. Material CON; No. available outlets 5.
2. Factory Built: Yes ☒, (Company PRE-CAST STEP No ☐
3. Dimension: Length ___ in.; Width ___ in. Depth ___ in.
4. Distance from Septic Tank 78.3 ft.
5. Serial Distribution: Yes ☐, No ☒
(If yes, show detailed plans.)

D. ABSORPTION FIELD: (Provide drawings.)
1. Type: HALF MOON
2. Lateral Lines: Depth below grade 30 in.
Number 3; Length of each line 100 ft
Total length of Laterals 137½ ft.;
Slope 6 in/100 ft. Diameter of pipe 16 in.; Shape HALF-MOON
Material: concrete ☐; fiber asbestos ☐; clay ☐; other FIBERGLASS
Distance between lateral lines 10 ft.
3. Trench Dimensions: Depth 30 in.; Width 48 in.
4. Filter Material: GRAVEL.
Depth of material from trench bottom 16 in.
5. Distances To:
Well or Suction Line 100+ ft.;
Stream 30 ft.; Pressure Line 200 ft.
Property Line 60 ft.
6. Percolation Rate: 10.6 minutes/inch

TYPICAL SKETCHES

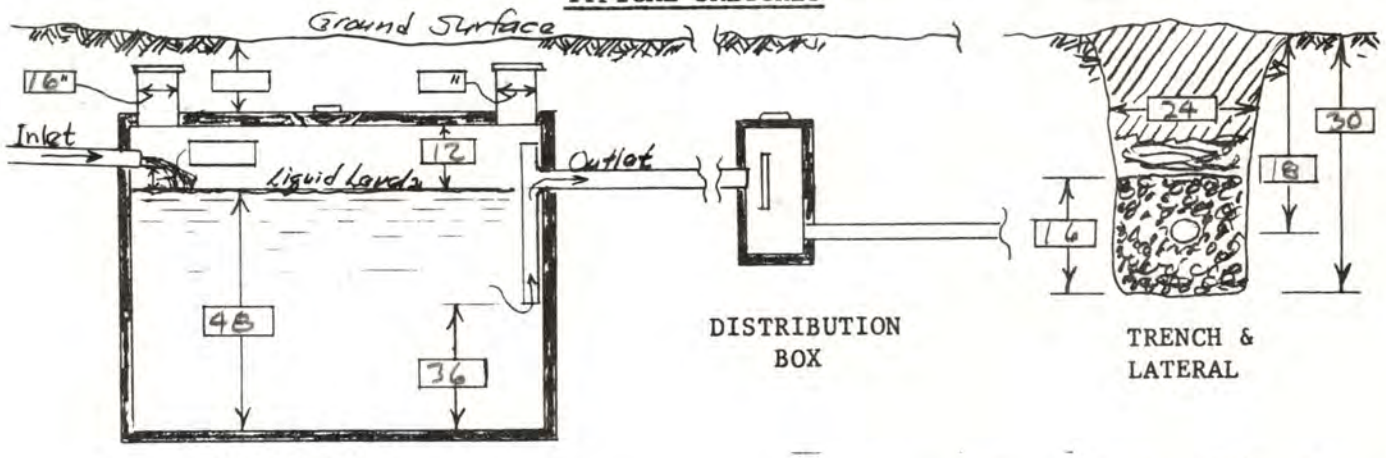


SEPTIC TANK

DISTRIBUTION BOX

TRENCH & LATERAL

Douglas Kirchhoff
Signature of Applicant

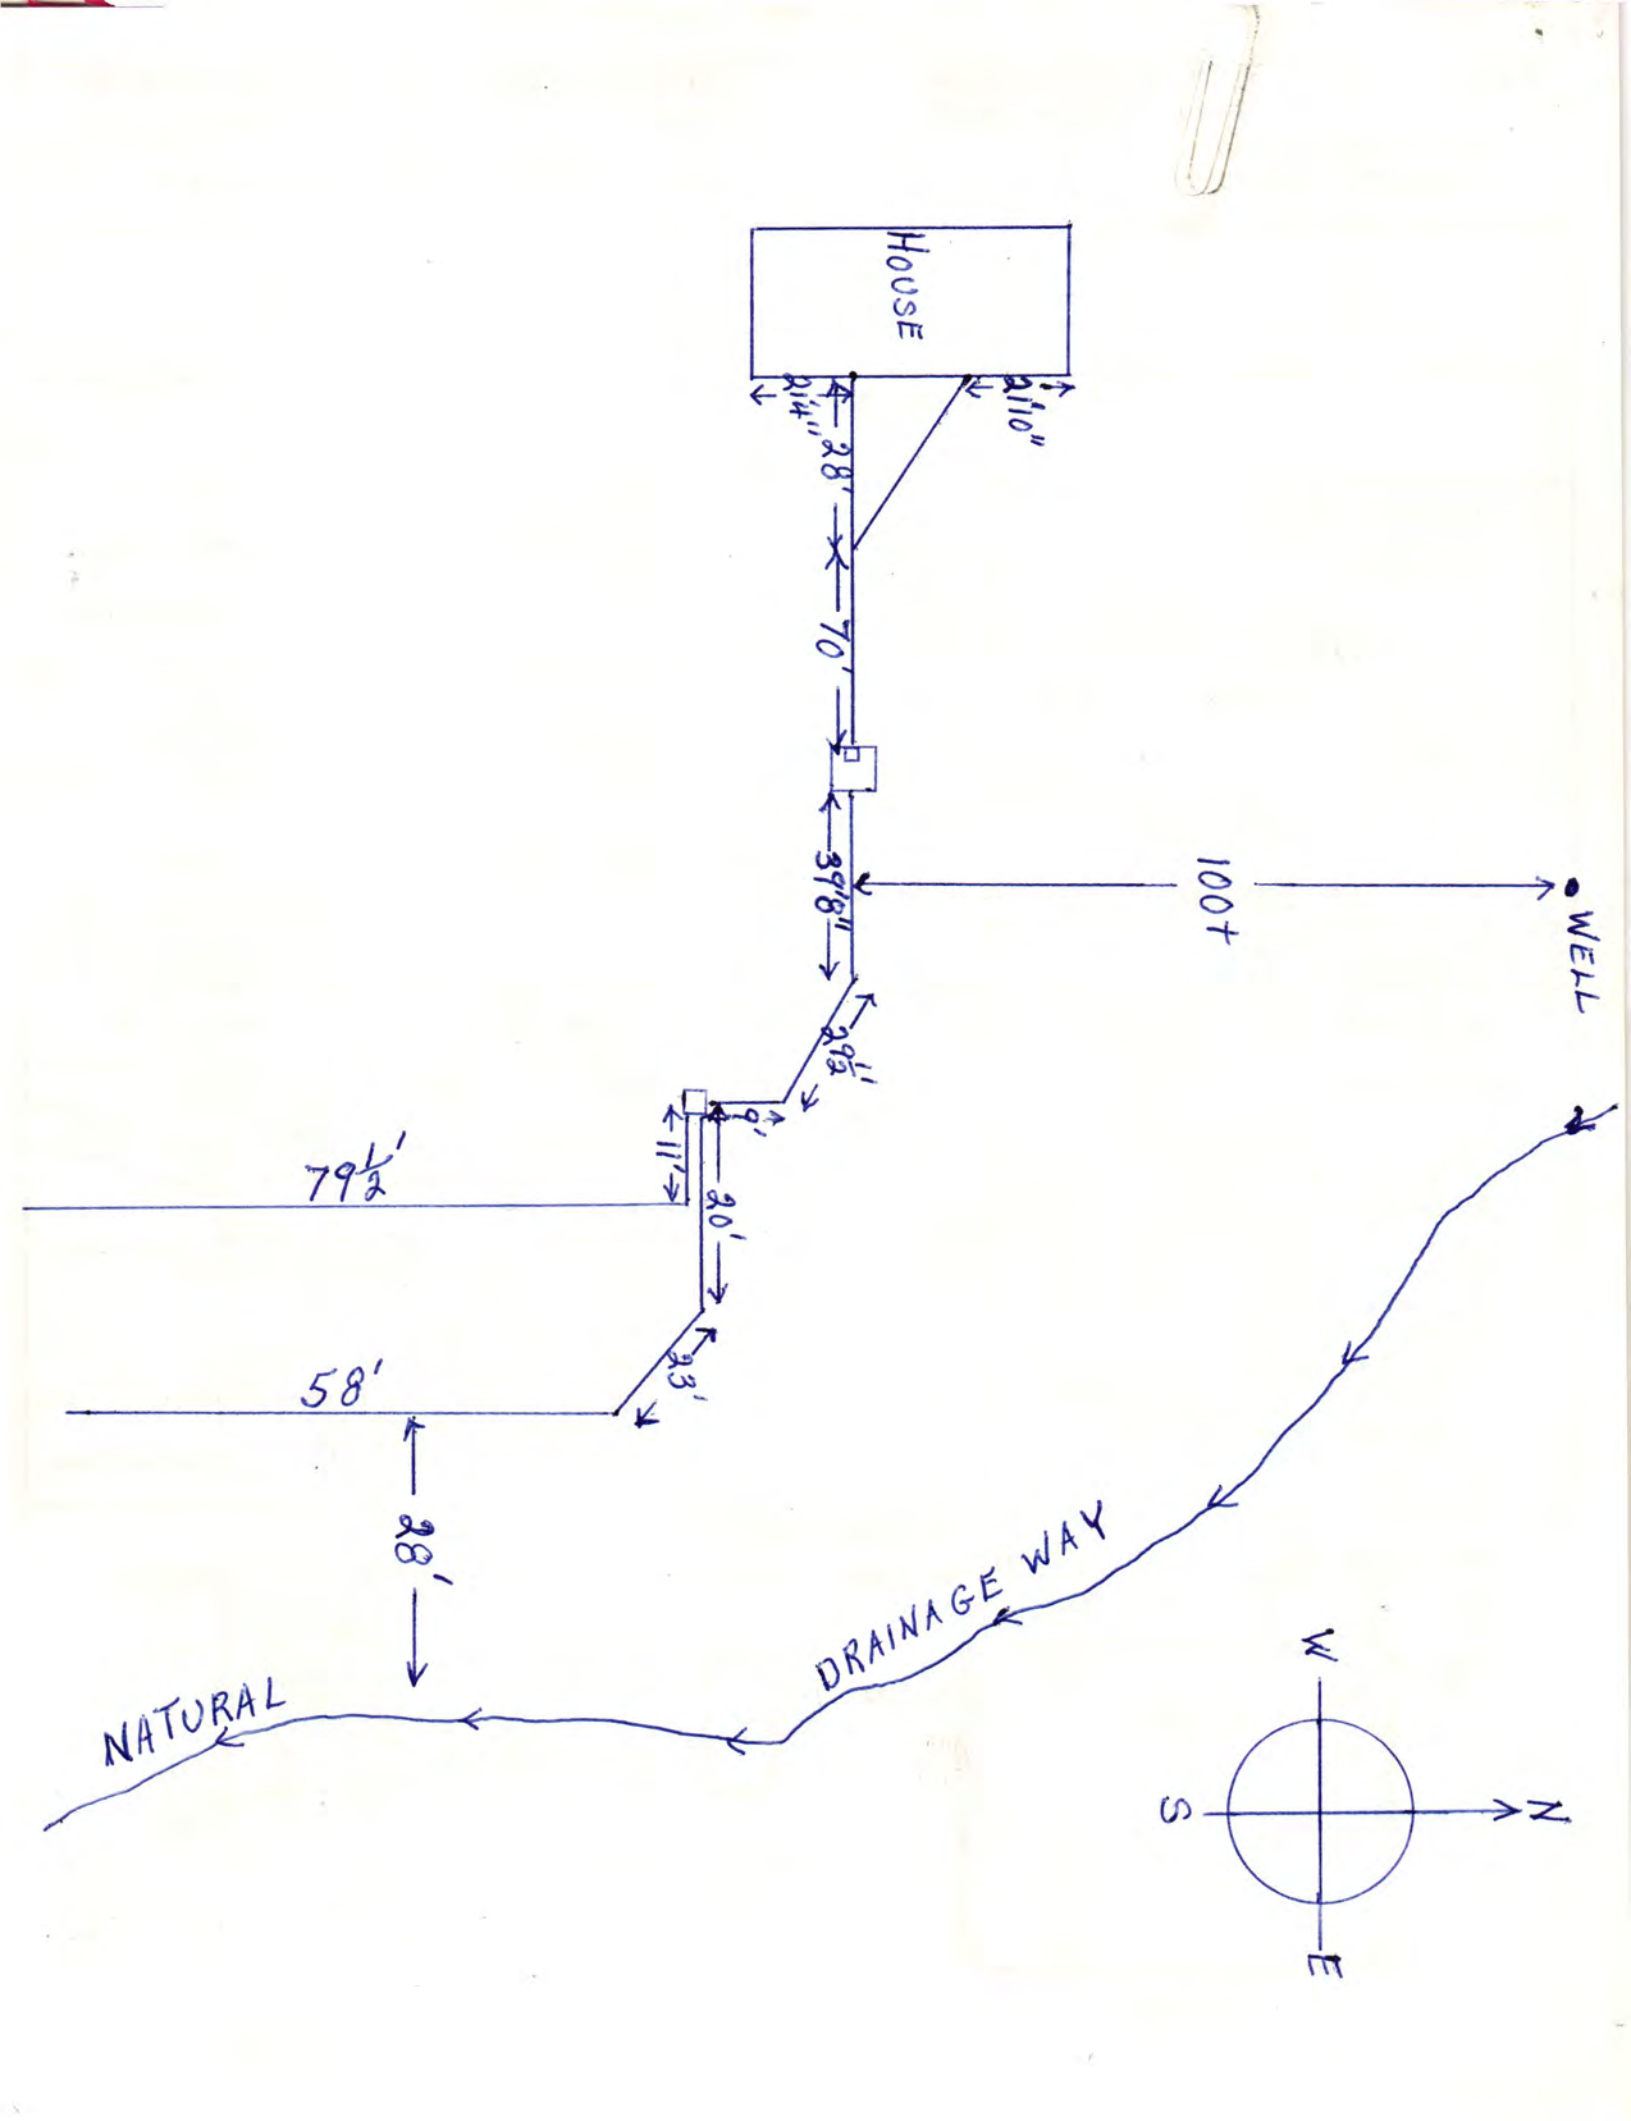
HOUSE
2'10"
2'4"
28'
70'
39'8"
100+
WELL
29½'
9'
11'
79½'
20'
23'
58'
28'
NATURAL
DRAINAGE WAY
W
S
N
E