LINCOLN-LANCASTER COUNTY HEALTH DEPARTMENT

2200 ST. MARYS
LINCOLN, NEBRASKA 68502

FILE NO. 2507-C

INDIVIDUAL SEWAGE SYSTEM CONSTRUCTION — TYPE OF PERMIT

DECEMBER 1, 1987 — THIS PERMIT EXPIRES

DAVID C. GLANTZ — ISSUED TO

600 SO. 52 STREET LINCOLN, NE 68510 — ADDRESS

T10N: R5E: Sec 17: Bk 2: Lot 1: Workman's Subdivision: 1220 Wendy Lane
LEGAL DESCRIPTION

REMARKS: NON-TRANSFERABLE NEW CONSTRUCTION

PERMIT	INSPECTION FEE	OCCUPATION TAX	TOTAL
$ 60.00	$	$	$ 60.00
ACCOUNTING NO.	ACCOUNTING NO.	ACCOUNTING NO.	CODE
	110.16	148.14	6-2

RECEIPTED BY	DATE	AMOUNT
MG	6-2-87	

VALID RECEIPT ONLY IF RECEIPTED IN THIS SPACE

HEALTH
ISSUING OFFICER

THIS PERMIT IS ISSUED AS PROVIDED BY COUNTY RESOLUTION NO. 2832

20109-0977

FORM 20103-0477
REQUEST FOR SITE CLEARANCE AND PERMIT
FOR INDIVIDUAL SEWAGE DISPOSAL SYSTEM
City Ordinance No. 9150 ☐
County Resolution No. 2832 ☒

LINCOLN-LANCASTER COUNTY HEALTH DEPARTMENT
Division of Environmental Health
2200 St. Marys Avenue
Lincoln, Nebraska 68502
Phone: 471-7800

A

FILING FEE: $ 60.00

FILE NO. 2507-C

DATE: 1 JUNE 1987

The undersigned hereby requests SITE CLEARANCE and PERMIT to construct an Individual Sewage Disposal System in conformance with appropriate resolution or ordinance, as described herein:

1. Legal description of property: Twp. 10N ; Range 5E ; Section 17 ;
   Block 2 : Lot 1 : Addition WORKMAN'S SUBDIVISION
   Street Address 12200 WENDY LANE

2. Property Use: Residential ☒ ; Commercial ☐ Other Use ☐
   No. of Bedrooms 3 . Describe

3. Type of Individual Sewage Disposal System: Septic Tank ☒ ; Other ☐

4. Distance to public sewer: _____ ft.

David C. Glantz
Signature of Applicant (Owner or Lessee)

600 S. 52nd St. LINCOLN, NE
Address

(Do not write below this double line)

1. Health Department: Date Rec'd. 6/1/87. Date Frwd. 6/2/87. ACTION: Approved ☒ Disapproved ☐ Signature: Jerrold C. Wood

2. Supt. Bldg. Insp.: or Village Clerk: Date Rec'd. 6/2/87. Date Frwd. 6/2/87. ACTION: Approved ☒ Disapproved ☐ Signature: Gary Stewart

3. City or County Engineer: Date Rec'd. 6-2-87. Date Frwd. 6-2-87. ACTION: Approved ☒ Disapproved ☐ Signature: Harold E. Lothan

REMARKS OR REASONS FOR DISAPPROVAL

Site Visits:
Date: 8/4/88 by: J. C. H.
Date: 8/4/88 by: J. C. H.
Date: / / by:

White: Health Dept. Copy
Yellow: Engineers Copy
Pink: Bldg. Inspector's Copy

INSTALLATION FINAL WRITTEN APPROVAL
Date: 8/5/88 By: J. C. Wood

FORM 20105-0477
SOIL ABSORPTION TEST DATA REPORT
(Annex to Application)
(Reference: City Ordinance No. 9150 and County Resolution No. 2832)

LINCOLN-LANCASTER COUNTY HEALTH DEPARTMENT
Division of Environmental Health
2200 St. Marys Avenue
Lincoln, Nebraska 68502
Phone: 471-7800

B

FILE NO. 2507-C

PROPERTY WHERE SOIL TESTED:

Location: Township_____; Range_____; Section & ¼ Section_____.
Property Dimensions: _____ft. x _____ft. Area:_____acres. (Attach Sheet C with sketch of property).
Soil Type: Silty Clay ☐ ; Silty Clay Loam ☐ ; Sandy Loam ☐ ; Silt Loam ☐ ; Clay Loam ■ .
Dates of Tests: 3-15-86 to 3-16-86. Weather: Precip. 03 Temp. 37°.

126th + W Holdrege ¼ mi No. East Side Wendy Lane Lot 1 Bl. 2
Holes 3-4 had water in From Pre. test

OWNER: Dave Glantz
Address: 600 So. 52 St. Lincoln 68510
483-1814

PERCOLATION TEST DATA TABLE

a.	b.	c.	d.	e.	f.	g.	h.	i.	j.	k.	l.	m.	n.
		Pre-Saturation Period				Percolation Readings						Results	
		Start		End		Start			End				
Hold No.	Hole Depth (in.)	Date (Mo./ Day)	Time (Hr./ Min.)	Date (Mo./ Day)	Time (Hr./ Min.)	Date (Mo./ Day)	Time (Hr./ Min.)	Water Level (in.)	Time (Hr./ Day)	Water Level (in.)	Elapsed Time (Min.)	Water Level Drop (in.)	Percolation Rates (Min./in.)
1	36"	3-15	8:00 Am	3-16	6:00 Am	3-16	6:00 Am	6"	10:00 Am	5"	30m	1"	1.0
2	36"	3-15	"	3-16	"	3-16	6:00 Am	6"	10:00 Am	5½"	30m	½"	.5
3	36"	3-15	"	3-16	"	3-16	6:00 Am	6"	10:00 Am	5⅞"	30m	⅛"	.125
4	36"	3-15	"	3-16	"	3-16	6:00 Am	6"	10:00 Am	5⅞"	30m	⅛"	.125
5	36"	3-15	"	3-16	"	3-16	6:00 Am	6"	10:00 Am	5¾"	30m	¼"	.25
6	36"	3-15	"	3-16	"	3-16	6:00 Am	6"	10:00 Am	5"	30m	1"	1.0

William Hoogland
Signature of Person Conducting Test

Sum of Percolation Rates: _____
Average of Rates: _____
Mean of Rates: _____

Address 2701 N 27th Phone 464-0638

(Do not write below this line)

REVIEWING ACTION

Remarks: _____
Soil Type (SCS): 5hD Sharpsburg silty clay loam
Date: 3-21-86

Approved Percolation Rate (a)
A. 60 min./inch
B. _____ min./inch
C. _____ min./inch

Ron Yanney
Signature of Reviewing Official

FORM 20102-0477
PRELIMINARY PLANS & SPECIFICATIONS FOR SEWAGE DISPOSAL SYSTEM (Annex to Application)
City Ordinance No. 9150 ☐
County Resolution No. 2832 ☐


LINCOLN-LANCASTER COUNTY HEALTH DEPARTMENT
Division of Environmental Health
2200 St. Marys Avenue
Lincoln, Nebraska 68502
Phone: 471-7800

C

Sketch of property showing Percolation Test hole locations, well, residence, direction and property line.

FILE NO. 2507-C

Indicate on sketch if residence and well are exisiting or proposed.

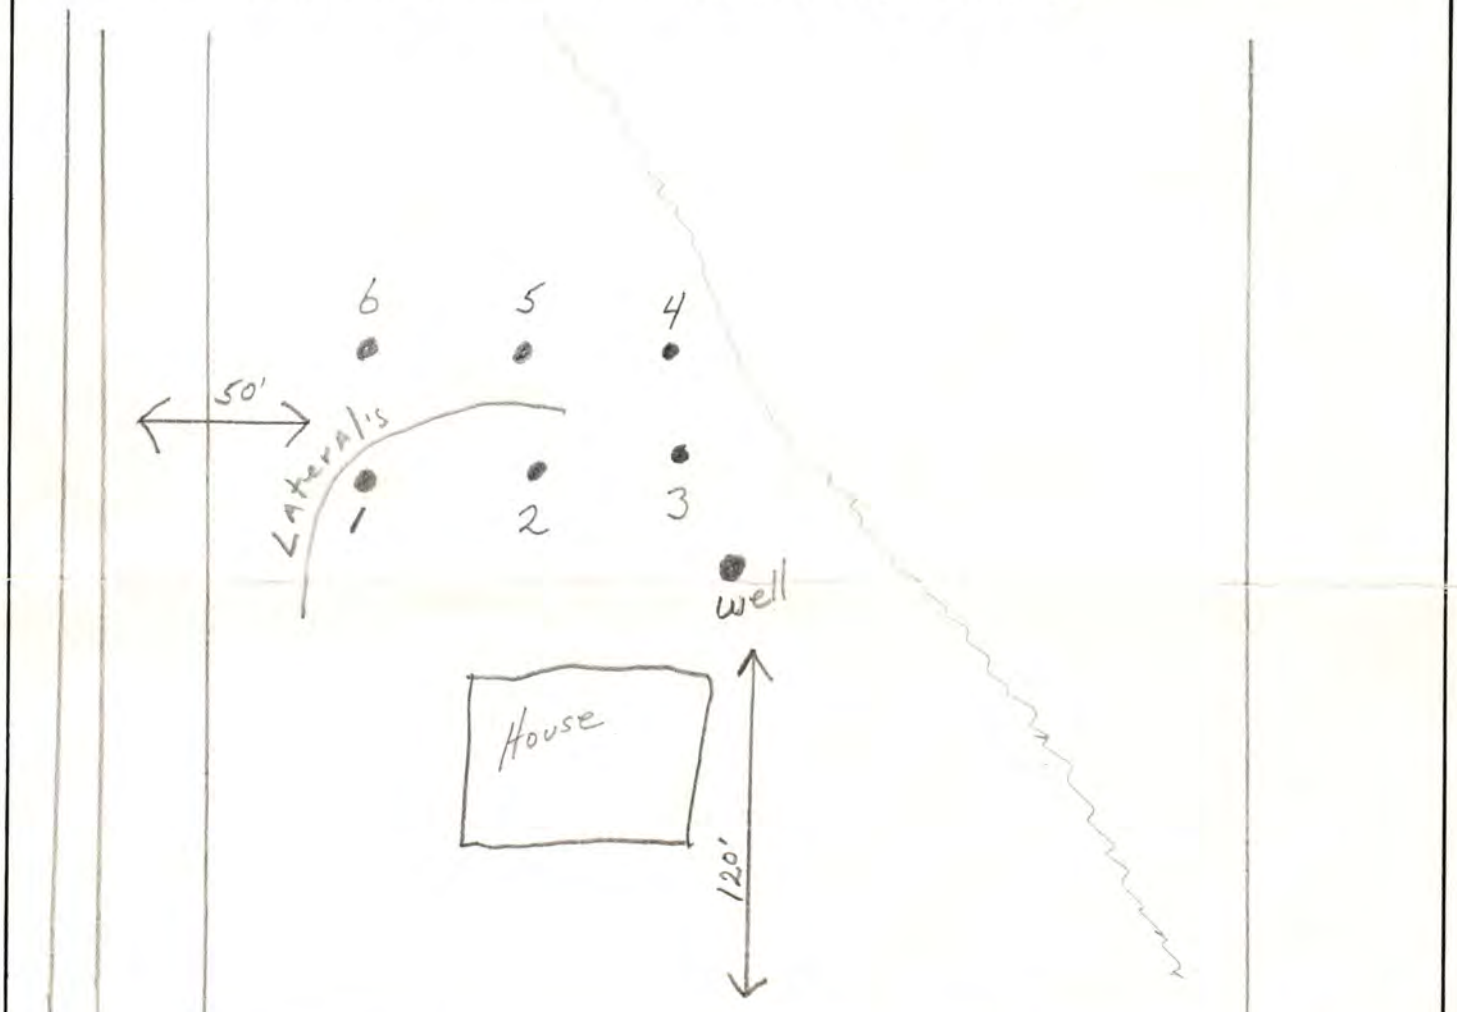

REVIEWING ACTION

Remarks: _____

Date: JUNE 1, 1987

Minimum Design Requirement
1. Capacity of Septic Tank 1000 gals.
2. Total Length of Laterals _____ ft.
3. With a Trench Width of _____ in.
4. Total Area of Lateral needed 990 sq.ft.

Gerrold C. Hood
Signature of Reviewing Official

FORM 20104-0477
PLANS & SPECIFICATIONS FOR SEWAGE DISPOSAL SYSTEM (Annex to Application)
City Ordinance No. 9150 ☐
County Resolution No. 2832 ☐

LINCOLN-LANCASTER COUNTY HEALTH DEPARTMENT
Division of Environmental Health
2200 St. Marys Avenue
Lincoln, Nebraska 68502
Phone: 471-7800

D

DATE: 8-4-86

FILE NO. _____


SPECIFICATIONS AS BUILT

A. BUILDING SEWER:
1. Material Pla 160; Diameter 4 in.
2. Distance above basement floor ____ in., or below basement floor 18 in.
3. Distance between dwelling and septic tank 70.6" ft.
4. Number of clean-outs one.
5. Distances to:
Well or Suction Line 20 ft.;
Stream ____ ft.; Pressure Line ____ ft.; Property Line ____ ft.

B. SEPTIC TANK:
1. Material Concr; No. of compartments 1.
2. Capacity 1000 gals.;
3. Factory Built: Yes ☒ No ☐
(Company Pre Cast)
4. Manholes: Over Inlet; diam. 4 in.
Over Outlet; diam. 4 in.
Riser Above ☒ Below ☐ Grade 12 in above
5. Inlet: Baffle ☐ ; or Tee ☐
6. Outlet: Baffle ☒ ; or Tee ☐
7. Depth of top of tank below finished grade 8 in.
8. Distances to:
Well or Suction Line 58 ft.;
Stream ____ ft.; Pressure Line ____ ft.; Property Line ____ ft.

C. DISTRIBUTION BOX:
1. Material Pla; Number - available outlets 7.
2. Factory Built: Yes ☒ No ☐
(Company Hamil Conc)
3. Distance from Septic Tank 132 ft.

D. ABSORPTION FIELD: (Provide as built drawings on back of this form)
1. Type: Half Rounds ☐ Perforated Pipe ☐
Diameter of Half Round ____ or
Perforated Pipe 4".
Material: fiberglass ☐ ; plastic ☒ ;
concrete ☐ ; other ____.
2. Lateral Lines:
Number ____ ; Length of each line 30, 100, 100, 100, ____ ft.;
Total length of laterals 330 ft.;
Distance between lateral lines 7 0 ft.
3. Trench dimensions: Width 36" ft.;
Slope 2" in/100 ft.; Average Depth 22 in.
4. Filter Material: Road Gravel
Depth of Material 12 in.
5. Distances to:
Well or Suction Line 102 ft.;
Stream ____ ft.; Pressure Line ____ ft.; Property Line ____ ft.

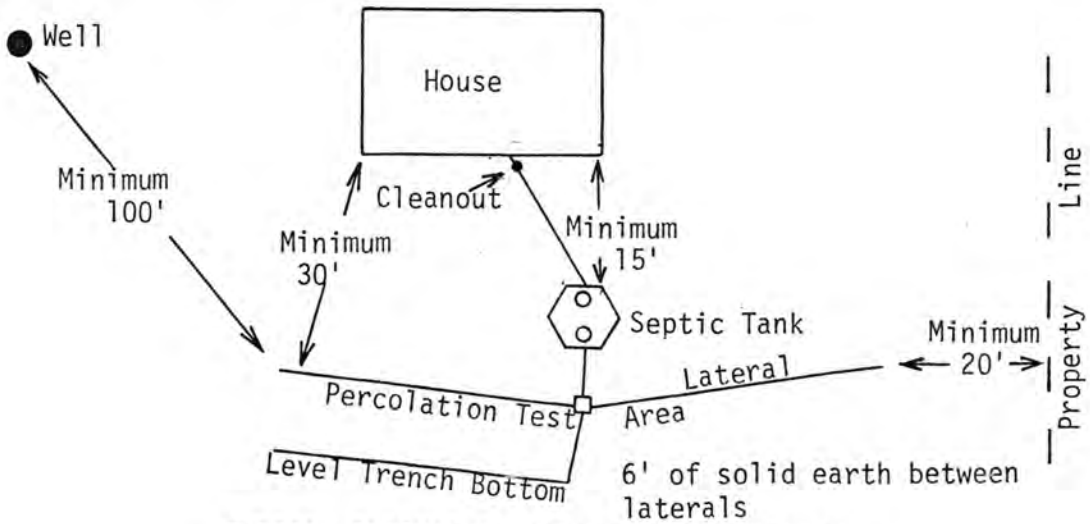

TYPICAL INDIVIDUAL SEWAGE SYSTEM DESIGN

AS BUILT DRAWING OF SYSTEM

DATE 8-4-88 INSTALLER Linlek Ag. Co

