LINCOLN-LANCASTER COUNTY HEALTH DEPARTMENT

ENVIRONMENTAL HEALTH DIVISION

2200 St. Marys Ave Lincoln, NE 68502-3785 (402) 441-8000

NON TRANSFERABLE

P E R M I T

Permit
SEWAGE INSTALLATION

No. 93380105801

Issued 08/30/93
Expires 02/01/94
Revenue Code 18754

Establishment
STEVE HALL
T10N R8E SEC 31
WIND HOECK LOT 1
112 & ALLEYSHEBA ROAD

FEES: $150.00

TOTAL $150.00

Permittee
STEVE HALL
RR0001
BOX 00598
BENNET NE 68317

Issued By M. Jane Ford
Health Director

THIS LICENSE OR PERMIT IS ISSUED SUBJECT TO REVOCATION AS PROVIDED BY LAW
"POST IN A PROMINENT PLACE"

FORM 20103-0477
REQUEST FOR SITE CLEARANCE AND PERMIT
FOR INDIVIDUAL SEWAGE DISPOSAL SYSTEM
City Ordinance No. 9150 ☐
County Resolution No. 2832 ☒

LINCOLN-LANCASTER COUNTY HEALTH DEPARTMENT
Division of Environmental Health
2200 St. Marys Avenue
Lincoln, Nebraska 68502
Phone: 471-7800

A

FILING FEE: $ 150.00

FILE NO. _____

DATE: 8-30-93

The undersigned hereby requests SITE CLEARANCE and PERMIT to construct an Individual Sewage Disposal System in conformance with appropriate resolution or ordinance, as described herein:

1. Legal description of property: Twp. 10N ; Range 8E ; Section 31 ;
   Block _____ : Lot 1 : Addition Wind Haeckel
   Street Address Alleysheba Rd & 112th

2. Property Use: Residential ☒ ; Commercial ☐ Other Use ☐
   No. of Bedrooms 4 . Describe _____

3. Type of Individual Sewage Disposal System: Septic Tank ☐ ; Other ☒

4. Distance to public sewer: _____ ft. EXPERIMENTAL SYSTEM

Steve Hall Hall Const.
Signature of Applicant (Owner or Lessee)

Rt 1 Bx 59B Bennet, Ne 68317
Address

(Do not write below this double line)

1. Health Department: Date Rec'd. 8/30/93. Date Frwd. 8/30/93. ACTION: Approved ☒ Disapproved ☐ Signature: Jerrold C. Nodd

2. Supt. Bldg. Insp.: or Village Clerk: Date Rec'd. 8/30/93. Date Frwd. 8/30/93. ACTION: Approved ☒ Disapproved ☐ Signature: Mary Spier

3. City or County Engineer: Date Rec'd. 8-30-93. Date Frwd. 8-30-93. ACTION: Approved ☒ Disapproved ☐ Signature: RD Hunt

REMARKS OR REASONS FOR DISAPPROVAL _____

Site Visits:
Date: 3/18/94 by: J.C.H. Sewer, tank & 2 laterals
Date: 3/21/94 by: P.D. 50' lateral added
Date: _____ by: _____

INSTALLATION FINAL WRITTEN APPROVAL
Date: 3-21-94 By: Paul Hunt

White: Health Dept. Copy
Yellow: Engineers Copy
Pink: Bldg. Inspector's Copy

* Experimental System provisional approval only

FORM 23-43

FORM 20104-0477
PLANS & SPECIFICATIONS FOR SEWAGE DISPOSAL SYSTEM (Annex to Application)
City Ordinance No. 9150 ☐
County Resolution No. 2832 ☒

LINCOLN-LANCASTER COUNTY HEALTH DEPARTMENT
Division of Environmental Health
2200 St. Marys Avenue
Lincoln, Nebraska 68502
Phone: 471-7800

D

DATE: 3-21-94

FILE NO. _____


SPECIFICATIONS AS BUILT

A. BUILDING SEWER:
1. Material Cast ; Diameter 4 in.
2. Distance above basement floor ____ in., or below basement floor 24 in.
3. Distance between dwelling and septic tank 67' ft.
4. Number of clean-outs 3 .
5. Distances to:
Well or Suction Line 45' ft.; Stream No ft.; Pressure Line ____ ft.; Property Line 150 ft.


B. SEPTIC TANK:
1. Material Concrete ; No. of compartments 1 .
2. Capacity 1500 gals.;
3. Factory Built: Yes ☑ No ☐
(Company _____)
4. Manholes: Over Inlet; diam. 10 in.
Over Outlet; diam. ____ in.
Riser Above ☐ Below ☑ Grade 4 in.
5. Inlet: Baffle ☑ ; or Tee ☐
6. Outlet: Baffle ☑ ; or Tee ☐
7. Depth of top of tank below finished grade 4 in.
8. Distances to:
Well or Suction Line 100 ft.; Stream No ft.; Pressure Line ____ ft.; Property Line 150 ft.

C. DISTRIBUTION BOX:
1. Material Concrete ; Number - available outlets 5 .
2. Factory Built: Yes ☑ No ☐
(Company _____)
3. Distance from Septic Tank 16 ft.

D. ABSORPTION FIELD: (Provide as built drawings on back of this form)
1. Type: Half Rounds ☐ Perforated Pipe ☑
Diameter of Half Round _____ or Perforated Pipe 4" .
Material: fiberglass ☐ ; plastic ☑ , concrete ☐ ; other _____ .
2. Lateral Lines:
Number 6 ; Length of each line 100 , 100 , 100 , 100 , 50+50 ft.;
Total length of laterals 500 ft.;
Distance between lateral lines 16 ft.
3. Trench dimensions: Width 1'6" ft.; Slope 0 in/100 ft.; Average Depth 18" in.
4. Filter Material: Gravel
Depth of Material 24 in.
5. Distances to:
Well or Suction Line 175 ft.; Stream No ft.; Pressure Line ____ ft.; Property Line 100 ft.

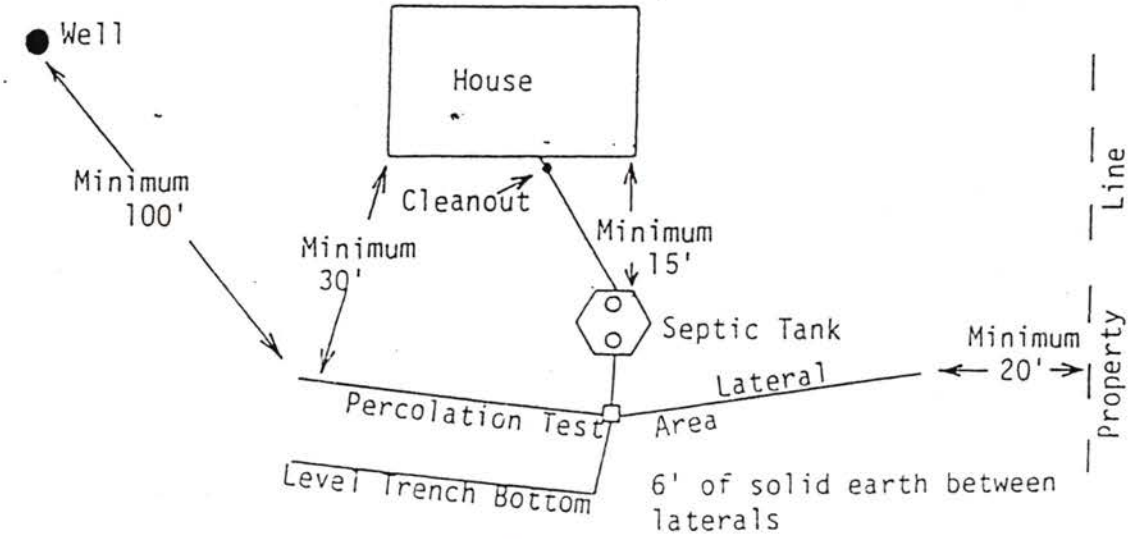

TYPICAL INDIVIDUAL SEWAGE SYSTEM DESIGN

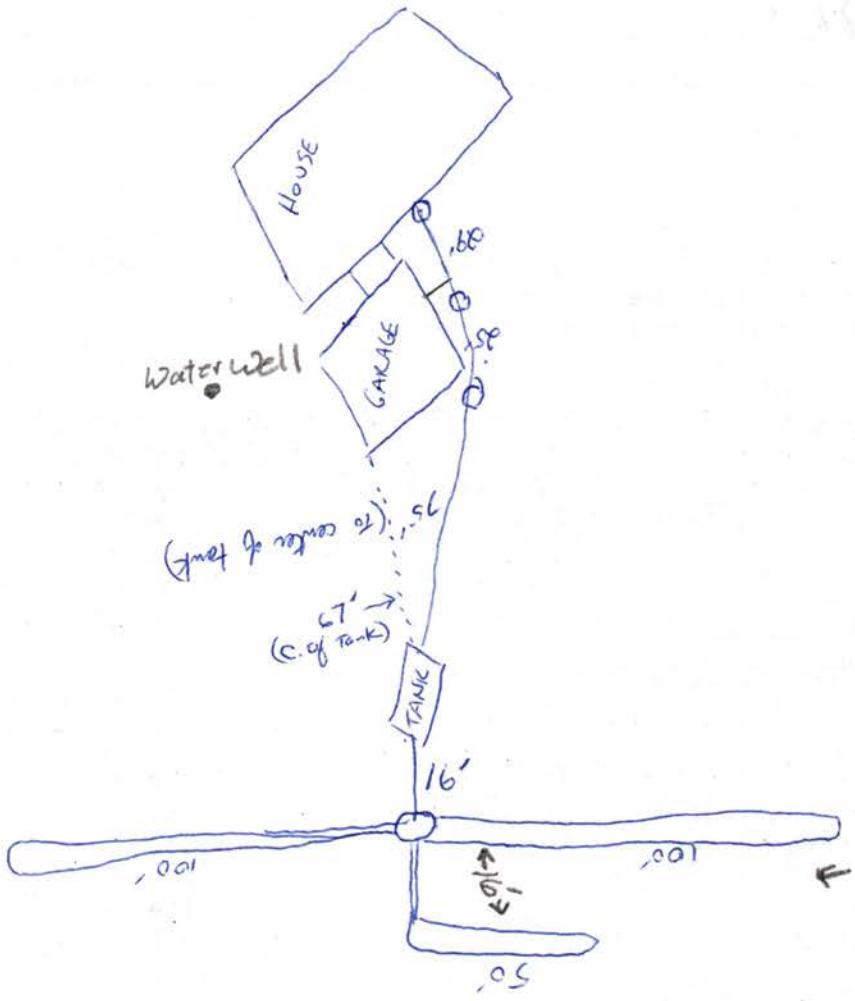

3-22-94 Wellmen Plumbing