Lincoln-Lancaster County Health Department
Environmental Public Health Division (402) 441-8027
3140 N Street Lincoln, NE 68510-1514

ON-SITE WASTE WATER SYSTEM
REPAIR PERMIT

No. HS000673

System Type: STANDARD

Situs: 300 W MILL RD

Legal Description: T11N-R06E-S03-Lot 6

Owner: MUNDERLOH, DWIGHT & KRISTINE
300 W MILL RD
RAYMOND NE
68428

Permit Fee:	$190.00
Total Fees:	$190.00
Issued:	10/22/2012
Expires	10/22/2013

Judith A Halstead

Judith A. Halstead, MS, Health Director

Dear Applicant:

The above document is your permit to repair an existing On-site Waste Water System at the location listed. Please contact this office once repairs are complete to obtain final approval before use.

Judith A Halstead

Judith A. Halstead, MS
Health Director

LLOYD JAKOUBEK

Overhead Wires
New Pool
House
Pool Pump
Pavement
145°
Total 75'
97'
Main Drain
Pool
Pool Deck
N

LLCHD HS000673

OCT 16 2012

Application to Alter, Extend or Repair an Onsite Wastewater Treatment System

HS000673

☐ Municipal Code 24.38 ☐ County Resolution Number 02-30

The undersigned hereby applies for a permit to: ☒ **ALTER** ☐ **EXTEND** ☐ **REPAIR** an existing wastewater treatment system, complying with appropriate Ordinance or Resolution, as marked above with drawings attached.

1. **Legal description of property:**
   Township 11 Range 6 1/4 ____ 1/4 SE Section 3
   Block ____ Lot 6 Addition ____
   Parcel ID 12 - 03 - 460 - 007 - 000 (i.e. 99-99-999-999-999)
   Street Address (no rural route) 360 W Mill Rd, Raymond, NE 68428

2. **Property use:** ☒ residential ☐ commercial ☐ other use
   Number of bedrooms 5 Describe ____

3. **Type of Present Individual Disposal System** ☐ septic system ☐ lagoon ☐ other

4. **Description of proposed alteration, extension or repair** Abandon 1 of the existing 1,000 Gallon septic tanks & install a new one in a different location to make room for a swimming pool. System will have 2-1,000 Gallon + tanks. See Attached Sheet

5. **Work to be done by:** ☐ owner ☒ contractor's name Lloyd Jurkovek, Raymond Contracting

6. **Estimated project:**
   a. Repair, replace, or minor extension with a cost less than $400 (no fee required).
   b. Total cost is greater than $400 (Return fee with this application)
   c. A permit is required if the use, operation, location, or type of system is changed.

Print Name Dwight Mundertoh Address Same Phone: 402-650-2330

Applicant Signature (owner or lessee) Kevin L. Jurkovek for Dwight Mundertoh

Please contact LLCHD for the permit fee for this application
Fee must be included before the application will be processed. Incomplete information will delay processing

HEALTH DEPARTMENT USE ONLY

Date received 10/22/12 REVIEW: ☒ Approved ☐ Disapproved By: ____

Site visits
Date ____/____/____ By ____
Date ____/____/____ By ____
Date ____/____/____ By ____

Installation final written approval
Date 10/22/12 By Doug Rule

Return application to:
Lincoln-Lancaster County Health Department
Environmental Public Health Division
3140 "N" Street, Lincoln, NE 68510
Phone: 441-8643


Business Office Use Only

Received: Date: 10/22/12 Amount $140.00 Check No. 7988 Initials BH

Revised 3-09

10-23-2012 10:31:59

As Built Drawing

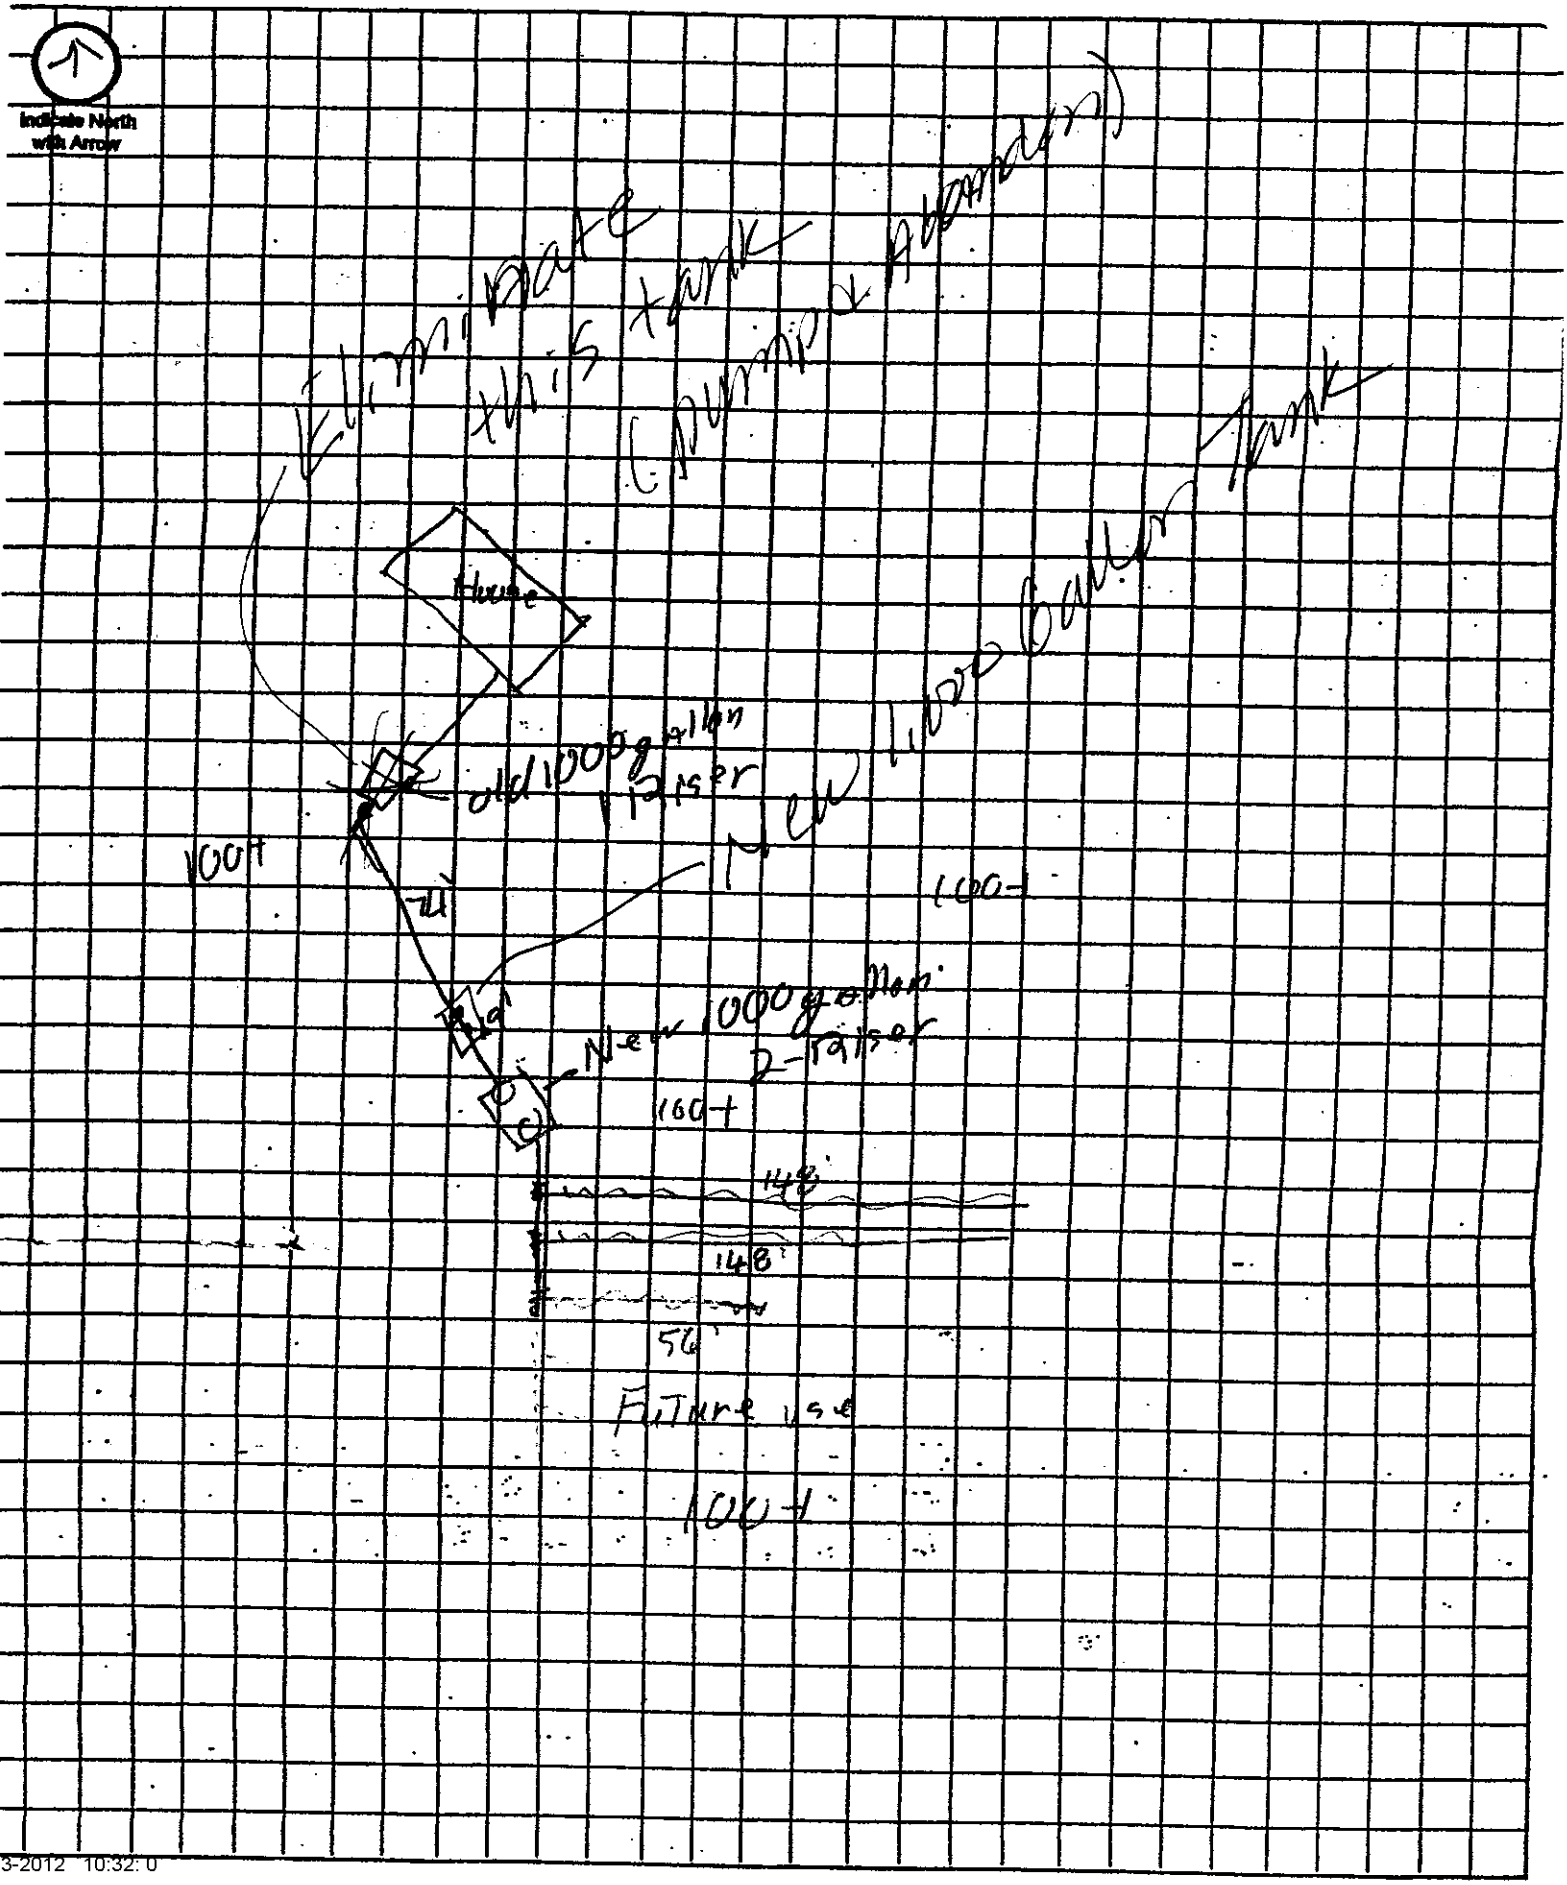

LLCHD HS000673

OCT 22 2012

D

Lincoln-Lancaster County Health Department
Environmental Public Health Division
3140 "N" Street • Lincoln, NE 68510-1514
Phone: 402-441-8022

Permit Number:

Onsite Wastewater Treatment System

As Built Plans & Specifications

Date 10-16-12 Legal Description SE (1/4) 1/4 53-T11-R6 Section Township Range

Onsite System Location

Address (no rural route) 300 W Mill Rd City Raymond NE, Zip 68428

Owner Dwight Munderloh Address same

A. Sewer Pipe

1. Material: SDR26
   Diameter: 4 in.
2. Distance above basement floor: _____ in.
   or distance below basement floor: _____ in.
3. Distance between dwelling and septic tank: 131 ft.
4. Number of clean-outs: 2
5. Distances to: well or suction line 100 ft.
   stream 100 ft.
   pressure line 100 ft.
   property line 100 ft.

B. Septic Tank

☐ Label with Manufacturer, address and gallon capacity

1. Material: Concrete
   Number of compartments: one
2. Capacity: 1000 gal.
3. Factory built: ☑ Yes ☐ No
4. Manholes: Over inlet, diameter 24 in.
   Over outlet, diameter _____ in.
   Riser: ☐ above ☐ below grade _____ in.
5. Inlet: ☑ baffle ☐ tee ☐ 6" dia. inspection pipe
6. Outlet: ☑ baffle ☐ tee ☐ 6" dia. inspection pipe
7. Depth to top of tank, below unfinished grade: 12 in.
8. Distances to: Well or suction line 100 ft.
   Stream 100 ft.
   Pressure line 100 ft.
   Property line 100 ft.

C. ☐ Distribution Box ☐ Drop Boxes

(≥ 12" inspection opening) (removable lid to inspect)

1. Material: _____
   Number available outlets: _____
2. Factory built: ☐ Yes ☐ No
3. Distance from septic tank: _____ ft.

D. Drainfield Absorption


☐ Trench ☐ Bed ☐ Level Bottom

1. Type: ☐ Half rounds ☐ Perforated pipe ☐ Chambers
   Diameter or width: _____
   Number of distribution lines in bed _____
   Material: ☐ fiberglass ☐ plastic ☐ concrete
   ☐ other _____
2. Drainfield Laterals: Number _____
   Length of each line: _____ ft. _____ ft.
   _____ ft. _____ ft., _____ ft.
3. Drainfield dimensions: Width _____ ft.
   Distribution Pipe Slope _____ in/100 ft.
   Average depth _____ in
4. Filter material: _____
   Depth of material _____ in.
5. Distances to: Well or suction line _____ ft.
   Pressure line _____ ft.
   Property line _____ ft.
   House or building _____ ft.
   Lake or Stream _____ ft.

Complete As-Built drawing on the back fo this form.

Onsite Wastewater System Design (Example)

Indicate North with Arrow.

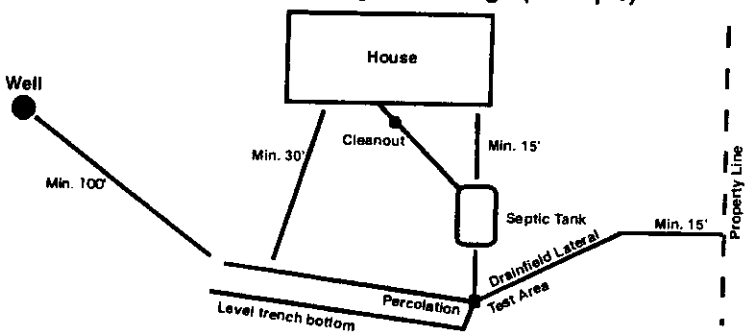

Lincoln-Lancaster County Health Department

ENVIRONMENTAL PUBLIC HEALTH DIVISION

3140 N STREET · LINCOLN, NE 68510-1514

009028

(402) 441-8000

Permit

SEWAGE SYSTEM REPAIR
SEWAGE REPAIR

Permit # 06390085401

Issued 06/02/06
Expires 06/02/07
Revenue Code 3157

Establishment

DWIGHT W MUNDERLOH
T11N R6E SEC 3 QTR SE
LOT 6IT
300 W MILL RD-RAYMOND

FEES: $150.00

Permittee

DWIGHT W MUNDERLOH
300 W MILL RD
RAYMOND NE 68428

TOTAL: $150.00

Bruce D. Dart

Bruce D. Dart, Health Director

EPH COPY

06390085401

Application to Alter, Extend or Repair an Individual Sewage Disposal System

☐ Municipal Code 24.38 ☒ County Resolution Number 2832

The undersigned hereby applies for a permit to: ☒ **ALTER** ☐ **EXTEND** ☐ **REPAIR** an existing Individual Sewage Disposal System, in conformance with appropriate Ordinance or Resolution, as described in this application and drawings attached hereto.

1. **Legal description of property:**
   Township 11 N Range 6E Section 3 1/4 Section SE
   Block ____ Lot 6 I.T. Addition ____
   Parcel ID 12 - 03 - 400 - 007 - 000 (i.e. 99-99-999-999-999)
   Street Address 300 W Mill Rd

2. **Property use:** ☒ residential ☐ commercial ☐ other use
   Number of bedrooms 5 Describe ____

3. **Type of Present Individual Disposal System** ☒ septic tank ☐ lagoon ☐ other

4. **Description of proposed alteration, extension or repair** add additional 1,000 Gallon concrete Septic tank with risers, install new drop box, install 344' of new laterals (Infiltrator Quick 4 chambers)

5. **Work to be done by:** ☐ owner ☒ contractor's name Lloyd Jakoubek, Raymond Contracting, Inc

6. **Estimated project:**
   a. Repair, replace or minor extension with a cost less than $400 (no fee required).
   b. Total cost is greater than $400 (Return fee with this application)
   c. A "construction permit" is required if the use, operation, location, or type of the system is being change.

Print Name Dwight Munderloh Address 300 W Mill Rd Raymond NE 68428 Phone 402-476-6238
Applicant Signature (owner or lessee) Dwight Munderloh

Please include the permit fee (~~$100~~ $150) with this application
Fee must be included before the application will be processed. Incomplete information will delay processing

---

HEALTH DEPARTMENT USE ONLY

Date received 6/2/06 REVIEW: ☒ Approved ☐ Disapproved By: Jerrold C. Hood

Site visits
Date 6/2/06 By Jerrold Hood
Date ____/____/____ By ____
Date ____/____/____ By ____

Installation final written approval
Date 6/6/06 By Jerrold Hood

Return application to: Lincoln-Lancaster County Health Department - Environmental Health Division
3140 "N" Street, Lincoln, NE 68510
Phone: 441-8022

Business Office Use Only
Received: Date: 6/5/06 Amount 150.00 Check No. 6164 Initials CW

White - Division Copy Pink - Business Office Revised 9/00

Lincoln-Lancaster County Health Department
Environmental Health Division
3140 "N" Street • Lincoln, NE 68510-1514
Phone: 402-441-8022

B

Permit Number: 0639008 54

Sewage Disposal System

Soil Absorption Test Data Report
Annex to Application

PLEASE PRINT OR TYPE

System Location (Indicate correct number and street)

Address 300 W Mill Rd (no rural route) City Raymond NE, Zip 68428

Owner Dwight + Chris Munderloh Addresss same

Soil Type (SCS): Mayberry (MEC2) Percolation Rate: 39 min./inch

Date of Tests 5/2/06 to 5/3/06 Weather: Precipitation 0 Temperature 64°

Percolation Test Data Table

A.	B.	C. D. E. F. Pre-Saturation Period				G. H. I. J. K. Percolation Readings					L. M. N. Results		
		Start		End		Start			End				
Hole No.	Hole Depth (in)	Date (Mo/Da)	Time (Hr/Min)	Date (Mo/Da)	Time (Hr/Min)	Date (Mo/Da)	Time (Hr/Min)	Water Lev (in.)	Date (Mo/Da)	Time (Hr/Min)	Elapsed Time (Min)	Water Level Drop (in)	Percolation Rates (Min/in)
1		5/2	4:00p	5/2	4:00p	5/3	12:00p	6	5/3	4:00p	30	1 1/16	30/1.06 = 28
2		"	"	"	"	"	"	"	"	"	"	13/16	30/0.81 = 37
3		"	"	"	"	"	"	"	"	"	"	11/16	30/0.69 = 43
4		"	"	"	"	"	"	"	"	"	"	3/4	30/0.75 = 40
5		"	"	"	"	"	"	"	"	"	"	3/4	30/0.75 = 40
6		"	"	"	"	"	"	"	"	"	"	5/8	30/0.63 = 48

Person Conducting Percolation Tests

Name: Terri Jirkovich, Raymond Contracting, Inc

Phone: 402-783-2663 or 402-890-3870

Address 13800 NW 70th St

Raymond, NE 68428

Sum of Percolation Rates: 236

Average of Rates: 39

Rate Used for Calculation: 39

DO NOT WRITE BELOW THIS LINE

Reviewing Action

Remarks

Signature of Reviewing Official: Jerrold C. Hood Date

FORM 23-101 10-96

Lincoln-Lancaster County Health Department
Environmental Health Division
3140 "N" Street • Lincoln, NE 68510-1514
Phone: 402-441-8022

D

Permit Number: 06390085 4

Sewage Disposal System

As Built Plans & Specifications

Date 6-2-06 Munderloh

System Location (Indicate correct number and street)

Address 300 W Mill Rd (no rural route) City Raymond NE, Zip 68428

A. Building Sewer

1. Material: class 160
   Diameter: 4 in.
2. Distance above basement floor: _____ in.
   or distance below basement floor: _____ in.
3. Distance between dwelling and septic tank _____ ft.
4. Number of clean-outs: _____
5. Distances to: well or suction line _____ ft.
   stream _____ ft.
   pressure line _____ ft.
   property line _____ ft.

B. Septic Tank

1. Material: 1-old Tank 1000g 1 New Tank 1000g.
   Number of compartments: one
2. Capacity: 2-1000g gal.
3. Factory built: ☒ Yes ☐ No
4. Manholes: Over inlet, diameter New 24 in.
   Over outlet, diameter 24 in.
   Riser: ☐ above ☐ below grade AT grade in.
5. Inlet: ☐ baffle ☐ tee
6. Outlet: ☐ baffle ☐ tee
7. Depth to top of tank, below unfinished grade: 12 in.
8. Distances to: Well or suction line 100+ ft.
   Stream 100+ ft.
   Pressure line 100+ ft.
   Property line 100+ ft.

C. Distribution Box

1. Material: Plastic
   Number available outlets: 6
2. Factory built: ☒ Yes ☐ No
3. Distance from septic tank: 8' - 19' - 31' ft.

D. Absorption Field


(Provide as-built drawings on back of this form)

1. Type: ☒ Half rounds ☐ Perforated pipe
   Diameter of half round: 34" wide x 12" Tall (Quick4)
   or perforated pipe: _____
   Material: ☒ fiberglass ☒ plastic ☐ concrete
   ☐ other New
2. Lateral lines: Number 3
   Length of each line: 148 ft. 148 ft.
   56 ft. _____ ft., _____ ft.
3. Trench dimensions: Width 4' ft.
   Slope 1-1AT in/100 ft.
   Average depth 24 in
4. Filter material: Dirt
   Depth of material 24 in.
5. Distances to: Well or suction line 100+ ft.
   Stream 100+ ft.
   Pressure line 100+ ft.
   Property line 100+ ft.

Indicate North with Arrow


Complete "As Built" drawing on back of this form.

Individual Sewage System Design (Example)

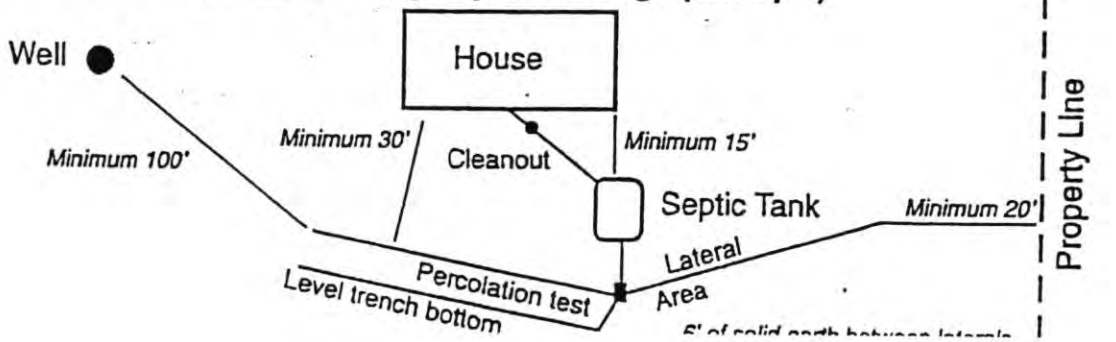

FORM 23-103 10-96

As Built Drawing

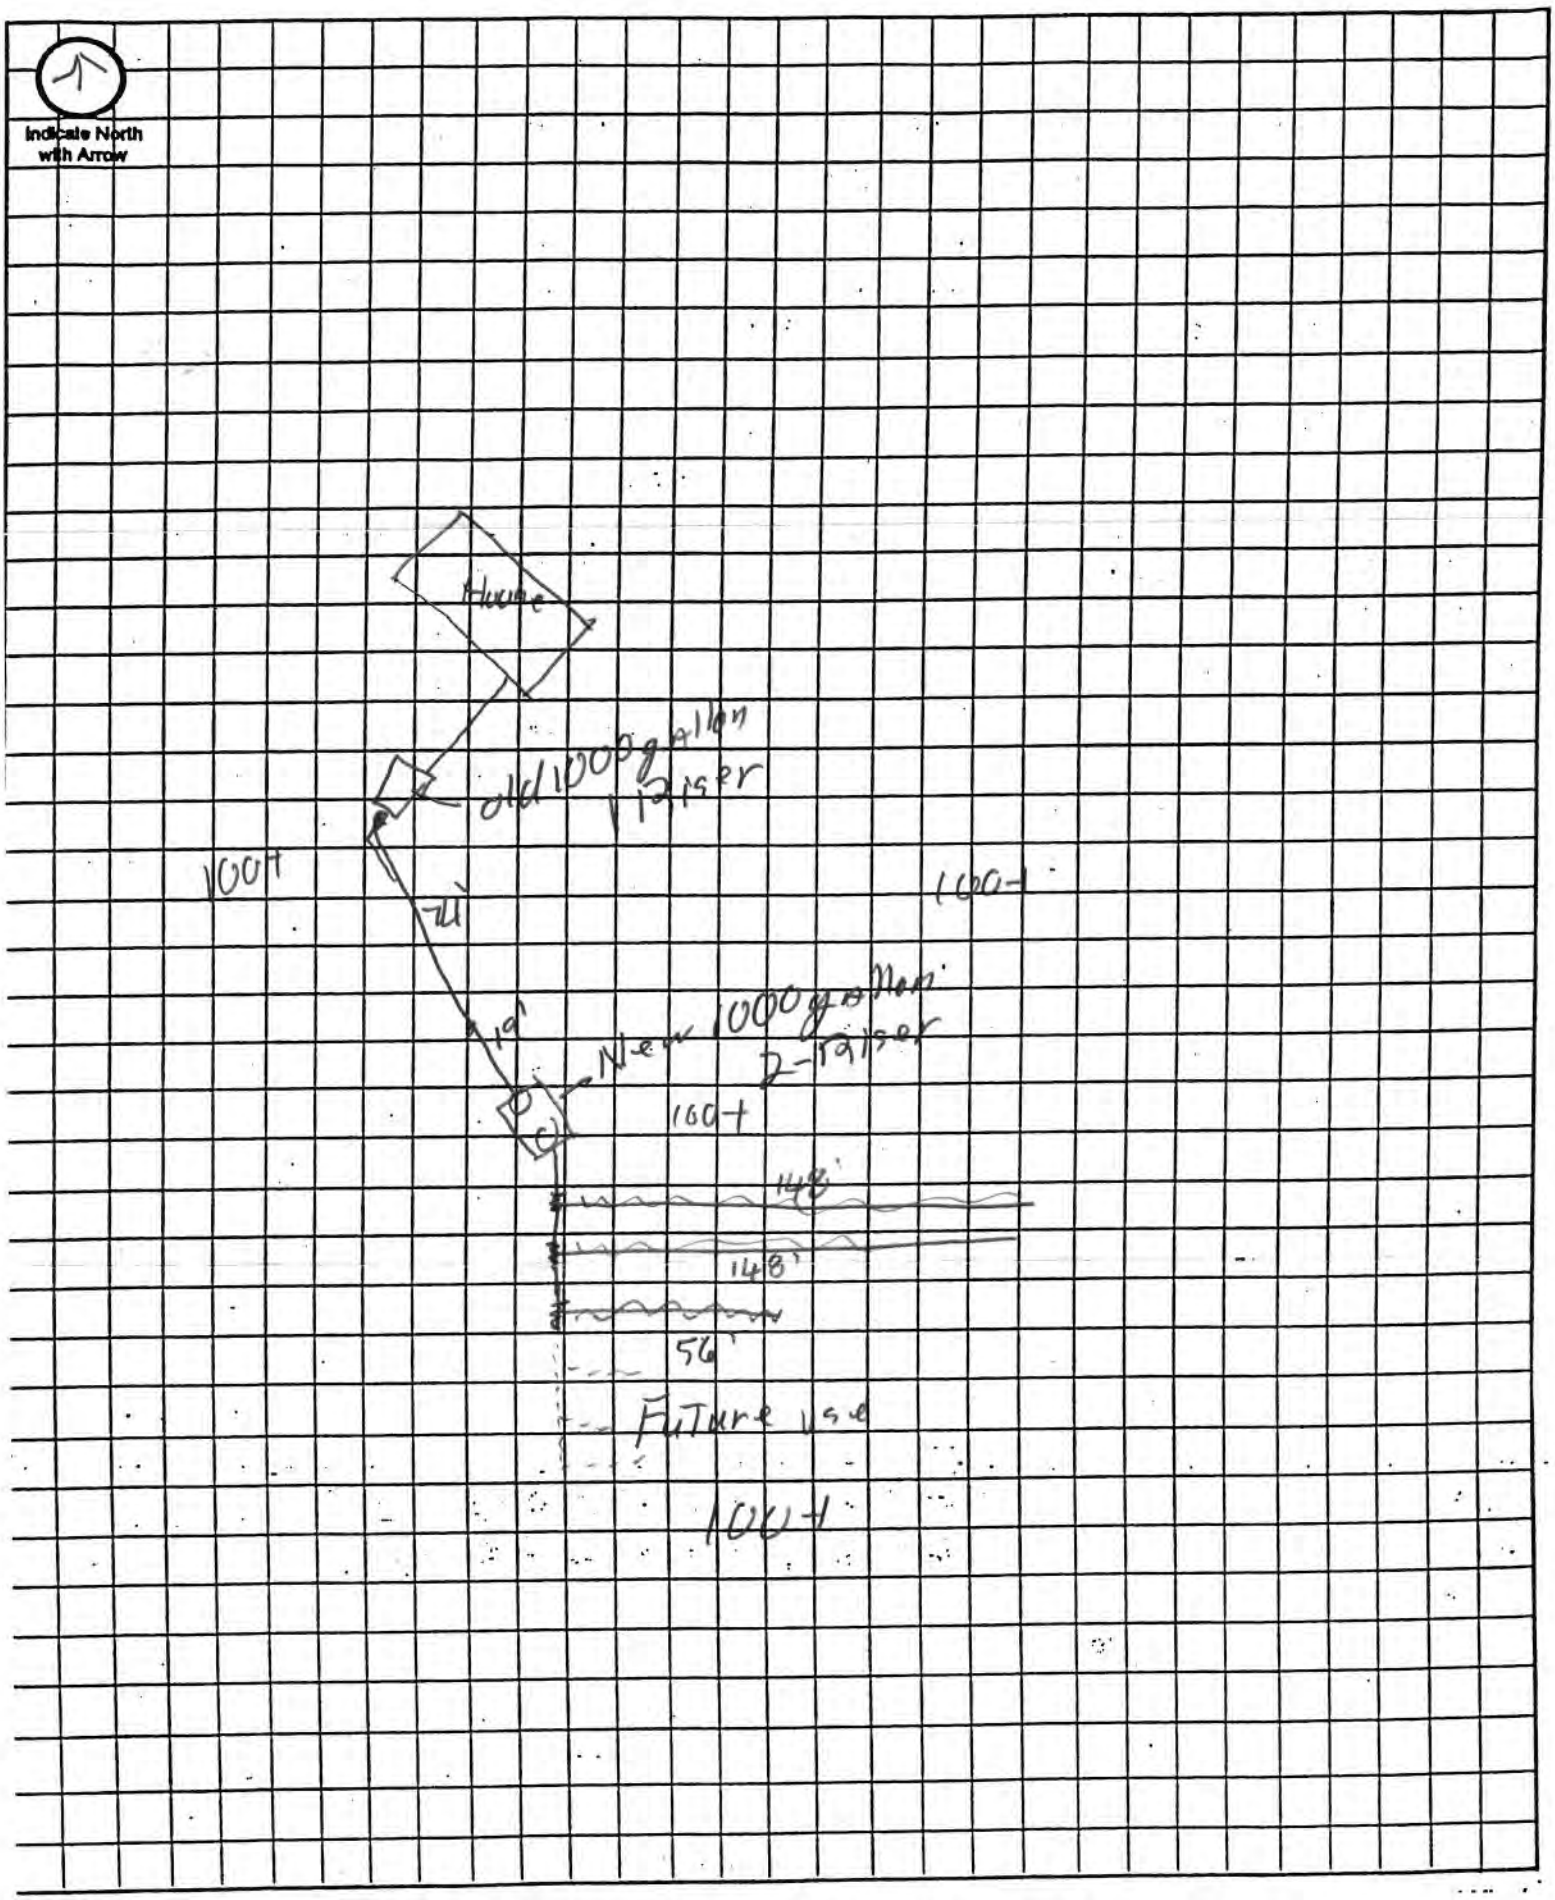

Lincoln-Lancaster County Health Department

ENVIRONMENTAL HEALTH DIVISION
3140 N STREET · LINCOLN, NE 68510-1514 (402) 441-8000

Permit

SEWAGE INSTALLATION
SEPTIC SYSTEM

Permit # 99380201801

Issued 06/18/99
Expires 12/18/99
Revenue Code 3157

FEES: $150.00

Establishment

DWIGHT W MUNDERLOH
T11N R6E SEC 3 QTR SE
LOT 6IT
300 W MILL RD--RAYMOND

Permitee

DWIGHT W MUNDERLOH
300 W MILL RD
RAYMOND NE 68428

TOTAL: $150.00

Leon F. Vinci, MPH, Health Director

• POST IN A PROMINENT PLACE • NOT TRANSFERABLE

010602

Lincoln-Lancaster County Health Department
Environmental Health Division
3140 "N" Street • Lincoln, NE 68510-1514
Phone: 402-441-8022

A

Permit Number: 993802018

Sewage Disposal System

Request for Site Clearance and Permit

Include Form B, Form C and Applicable Fees with this Application.

☑ Septic System ☐ Lagoon ☐ Other (Refer to Form C)

The undersigned hereby requests site clearance and permit to construct a Sewage Disposal System in conformance with appropriate resolution or ordinance, as described herein:

PLEASE PRINT OR TYPE

A. System Location (Indicate correct number and street) RAYMOND

Address 300 W. Mill Rd (no rural route) City Lincoln NE, Zip

Legal Description SE (1/4) 3 (1/4) 11N (Section) 6E (Township) (Range) Subdivision Addition Block G.I. Lot

Geographical Location (if known): Longitude Latitude

☐ Check if system mail address is not the same as the owner's address

B. Owner

Name Dwight W. Munderloh Signature Dwight W. Munderloh

Address 300 W. Mill Rd City/State/Zip Raymond, Nebr. 68428

☐ Check if owner designed system Home Phone 402-476-6238 Work Phone 402-464-2444

C. Contractor

Name Kent Apthorpe Company Name Apthorpe Const.

Address City/State/Zip

☐ Check if contractor designed system Work Phone 430 6817

D. Engineer/Installer ☐ Check and complete if engineer designed system

Designer Name Clint Presnell Firm Wellmann Work Phone 4306817

E. This System Will Serve a

☑ Residential Dwelling Number of Bedrooms 3 Is there a Whirlpool Bathtub (YES) NO

☐ Commercial Establishment/Other Facility Specify

Design flow in gallons per day Type of Wastewater: ☑ Domestic ☐ Non-Domestic.

DO NOT WRITE BELOW THIS LINE

Approval Process

☐ Municipal Code 24.38 ☒ County Resolution No. 2832

1. **Health Department** Date rec'd 6/17/99 Date frwd 6/18/99 ACTION ☒ Approved ☐ Disapproved Signature Jerrold C. Hood
2. **Supt. Bldg. Insp. or Village Clerk** Date rec'd 6/18/99 Date frwd 6/18/99 ACTION ☒ Approved ☐ Disapproved Signature
3. **City or County Engineer** Date rec'd 06/21/99 Date frwd ACTION ☒ Approved ☐ Disapproved Signature

Installation Final Written Approval

By Paul

Date 7-14-00

Business Office Use Only

Date Rec'd 06/17/99

Amt Paid 150.00

Rec'd By

Cash/Check No. 3886

FORM 23-100 10-96 White - Health Dept. Yellow - Engineer Pink - Bldg. Inspector

B

Lincoln-Lancaster County Health Department
Environmental Health Division
3140 "N" Street • Lincoln, NE 68510-1514
Phone: 402-441-8022

Permit Number: 993802018

Sewage Disposal System
Soil Absorption Test Data Report
Annex to Application

PLEASE PRINT OR TYPE

System Location (Indicate correct number and street)

Address W. 1/2 of SE 1/4 11N; RGE; E. 1/2 of Sec. 3 City Lancaster NE, Zip
(no rural route)

Owner Dwight Munderloh Address 300 West Mill Rd; Lincoln NE

Soil Type (SCS): ~~Sandy loam~~ MALCOLM SILT LOAM WITH SAND SPOT Percolation Rate: 21.5 min./inch

Date of Tests 6-9-99 to 6-10-99 Weather: Precipitation 1/2" Rain Temperature 80

Percolation Test Data Table

A.	B.	C. D. E. F. Pre-Saturation Period				G. H. I. J. K. Percolation Readings					L. M. N. Results		
		Start		End		Start			End				
Hole No.	Hole Depth (in)	Date (Mo/Da)	Time (Hr/Min)	Date (Mo/Da)	Time (Hr/Min)	Date (Mo/Da)	Time (Hr/Min)	Water Lev (in.)	Date (Mo/Da)	Time (Hr/Min)	Elapsed Time (Min)	Water Level Drop (in)	Percolation Rates (Min/in)
~~1~~	~~24~~	~~6-9~~	~~8:00~~	~~6-10~~	~~9:00~~	6-10	9:50	~~1.37~~	6-10	10:00	~~10~~	~~.125~~	~~80~~
2	28	6-9	8:00	6-10	9:00	6-10	9:50	6.37	6-10	10:00	10	.625	16.0
3	32	6-9	8:00	6-10	9:00	6-10	9:50	7	6-10	10:00	10	1.25	8.0
4	33	6-9	8:00	6-10	9:00	6-10	9:50	6.5	6-10	10:00	10	2	5.0
5	32	6-9	8:00	6-10	9:00	6-10	9:50	8	6-10	10:00	10	1.5	6.67
6	35	6-9	8:00	6-10	9:00	6-10	9:50	3.75	6-10	10:00	10	.75	13.33

Sum of Percolation Rates: 129
Average of Rates: 21.5
Rate Used for Calculation: 9.6

Person Conducting Percolation Tests

Name: Jacob Robison (Geotechnical Serv. Inc
Phone: (402) 466-8154
Address 4817 N. 56th St.
Lincoln NE 68504

DO NOT WRITE BELOW THIS LINE

Reviewing Action

Remarks

Signature of Reviewing Official Date

FORM 23-101 10-96


Lincoln-Lancaster County Health Department
Environmental Health Division
3140 "N" Street • Lincoln, NE 68510-1514
Phone: 402-441-8022

C

Permit Number: 99 380 2018

Sewage Disposal System
Preliminary Plan Specifications

Draw a plot plan showing system location, lines, distribution box, tank and laterals, percolation test hole locations, well, residence, compass direction and property lines. Indicate on drawing if residence and well are existing or proposed.

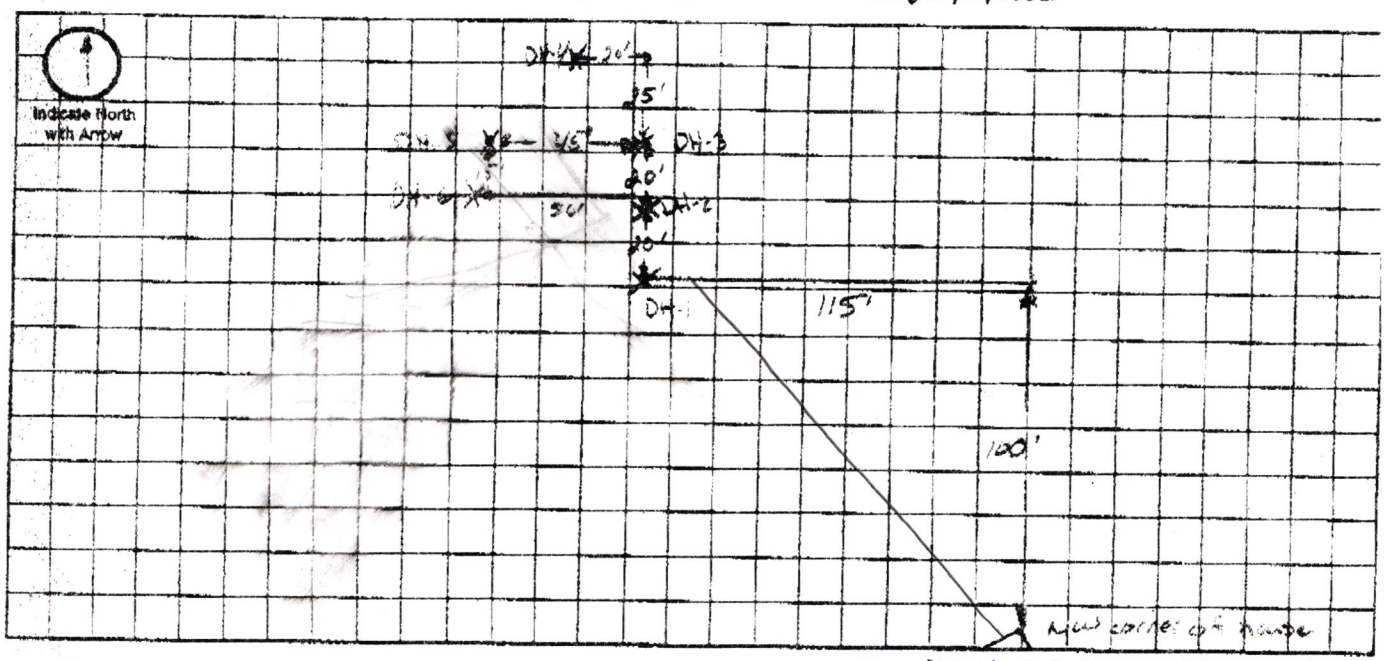

Approximate Scale: _____ ft. = _____ grid line/s

A. System Location (Indicate correct number and street)

Address (no rural route) 300 W Mill Rd City Lincoln NE, Zip _____

B. Proposed Septic Tank/s

Tank Material: ☑ Concrete ☐ Plastic ☐ Other _____

C. Proposed Absorption System (See Form B for Percolation Information)

Percolation Rate 21.5 (min. per inch) Soil Type: MALGOLM SILT LOAM WITH SAND SPOT Sandy Loam Land Slope: 2 %

Type of Absorption System: ☑ Trench ☐ Bed ☐ Other _____

Total Square Feet of Field Required: 762 sq. ft.

Type of Lateral: ☐ Half-Moon ☑ Perforated Pipe ☐ Other Lateral Material: _____

Capacity of Septic Tank 1000 gals Number of Absorption Beds: 3 Number of Distribution Laterals per Bed 1

Total Length of Laterals 300 ft. Number of Trenches 3 Trench Width 36"

D. Setbacks Check the Boxes Below if the Required Setback has been Satisfied

Distance From	Private Well	Public Well	Surface Water	Gound Water	Pressure Water Lines	Property Lines	Foundations Yours	Foundations Neighbors	All Other Setbacks
Tank (ft)	50 ☑	500 ☑	50 ☑	NA ☑	25 ☑	20 ☑	15 ☑	25 ☑	☑
Field (ft)	100 ☑	500 ☑	50 ☑	4 ☑	30 ☑	20 ☑	30 ☑	40 ☑	☑
Lagoon (ft)	100 ☐	500 ☐	50 ☐	N/A ☐	30 ☐	50 ☐	100 ☐	200 ☐	☐

E. Required Signatures

Home Building Contractor Kent Apthorpe Date _____

Installer Wellmann Plumbing Date 6-15-99

Attn. Paul

D

Lincoln-Lancaster County Health Department
Environmental Health Division
3140 "N" Street • Lincoln, NE 68510-1514
Phone: 402-441-8022

Permit Number: 993802018

Sewage Disposal System

As Built Plans & Specifications

Date 7/29/99

System Location (Indicate correct number and street)

Address 300 W Mill Rd (no rural route) City _____ NE, Zip _____

A. Building Sewer

1. Material: Sch. 40 PVC
   Diameter: 4" in.
2. Distance above basement floor: _____ in.
   or distance below basement floor: 12 in.
3. Distance between dwelling and septic tank: 40 ft.
4. Number of clean-outs: 1
5. Distances to: well or suction line cover 150 ft.
   stream NO ft.
   pressure line NO ft.
   property line Over 100 ft.

B. Septic Tank

1. Material: Concrete
   Number of compartments: 3
2. Capacity: 1000 gal.
3. Factory built: ☒ Yes ☐ No
4. Manholes: Over inlet, diameter — in.
   Over outlet, diameter — in.
   Riser: ☒ above ☐ below grade 6 in.
5. Inlet: ☒ baffle ☐ tee
6. Outlet: ☒ baffle ☐ tee
7. Depth to top of tank, below unfinished grade: 6 in.
8. Distances to: Well or suction line 100+ ft.
   Stream — ft.
   Pressure line — ft.
   Property line 100+ ft.

C. Distribution Box

1. Material: Plastic
   Number available outlets: 5
2. Factory built: ☒ Yes ☐ No
3. Distance from septic tank: 20 ft ft.

D. Absorption Field


(Provide as-built drawings on back of this form)

1. Type: ☐ Half rounds ☒ Perforated pipe
   Diameter of half round: _____
   or perforated pipe: 4"
   Material: ☐ fiberglass ☒ plastic ☐ concrete
   ☐ other _____
2. Lateral lines: Number 4
   Length of each line: 90 ft. 90 ft.
   90 ft. 30 ft., _____ ft.
3. Trench dimensions: Width 2 ft ft.
   Slope 1 in/100 ft.
   Average depth 2 ft in
4. Filter material: Gravel
   Depth of material 12 in.
5. Distances to: Well or suction line cover 150 ft.
   Stream NO ft.
   Pressure line NO ft.
   Property line over 100 ft.

Complete "As Built" drawing on back of this form.

Indicate North with Arrow

Individual Sewage System Design (Example)

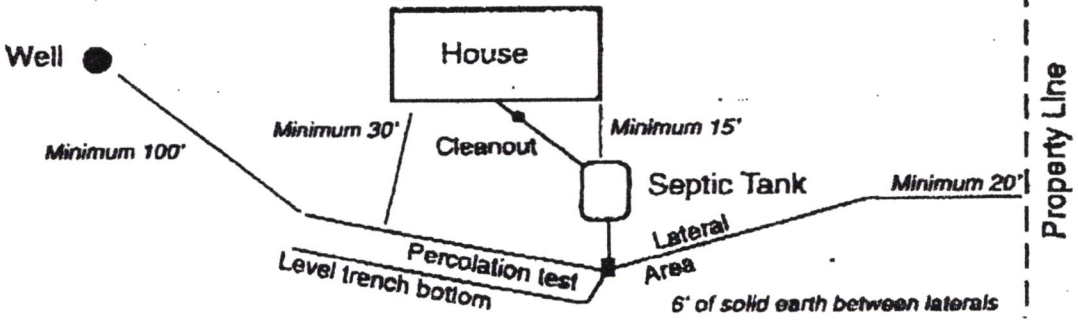



FORM 23-103 10-96

Attn. Paul

300 W Mill Rd.

As Built Drawing

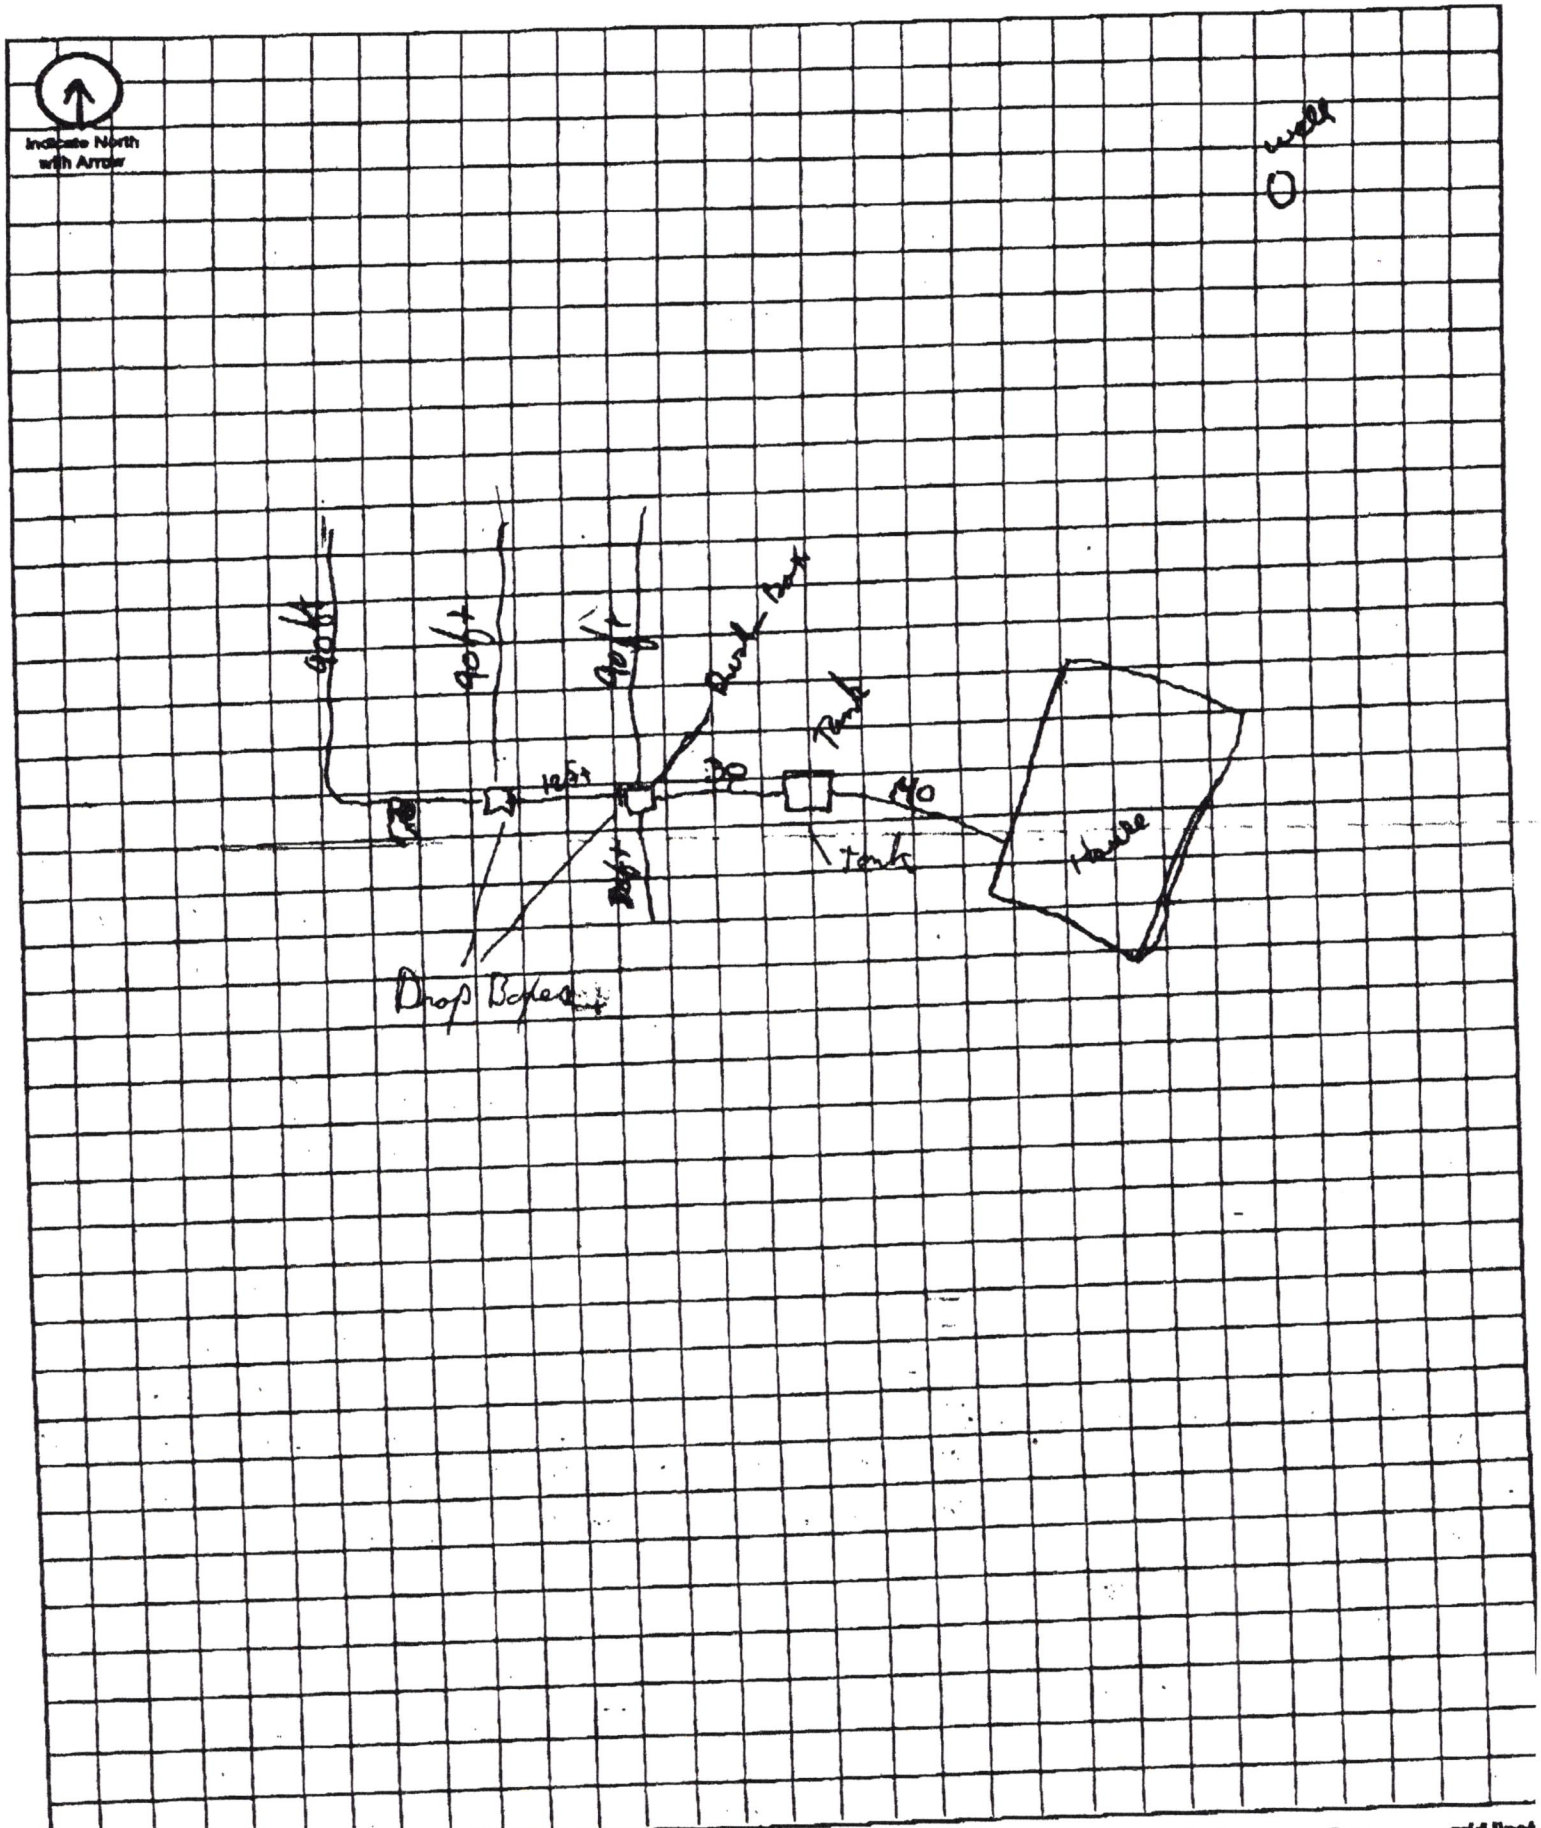

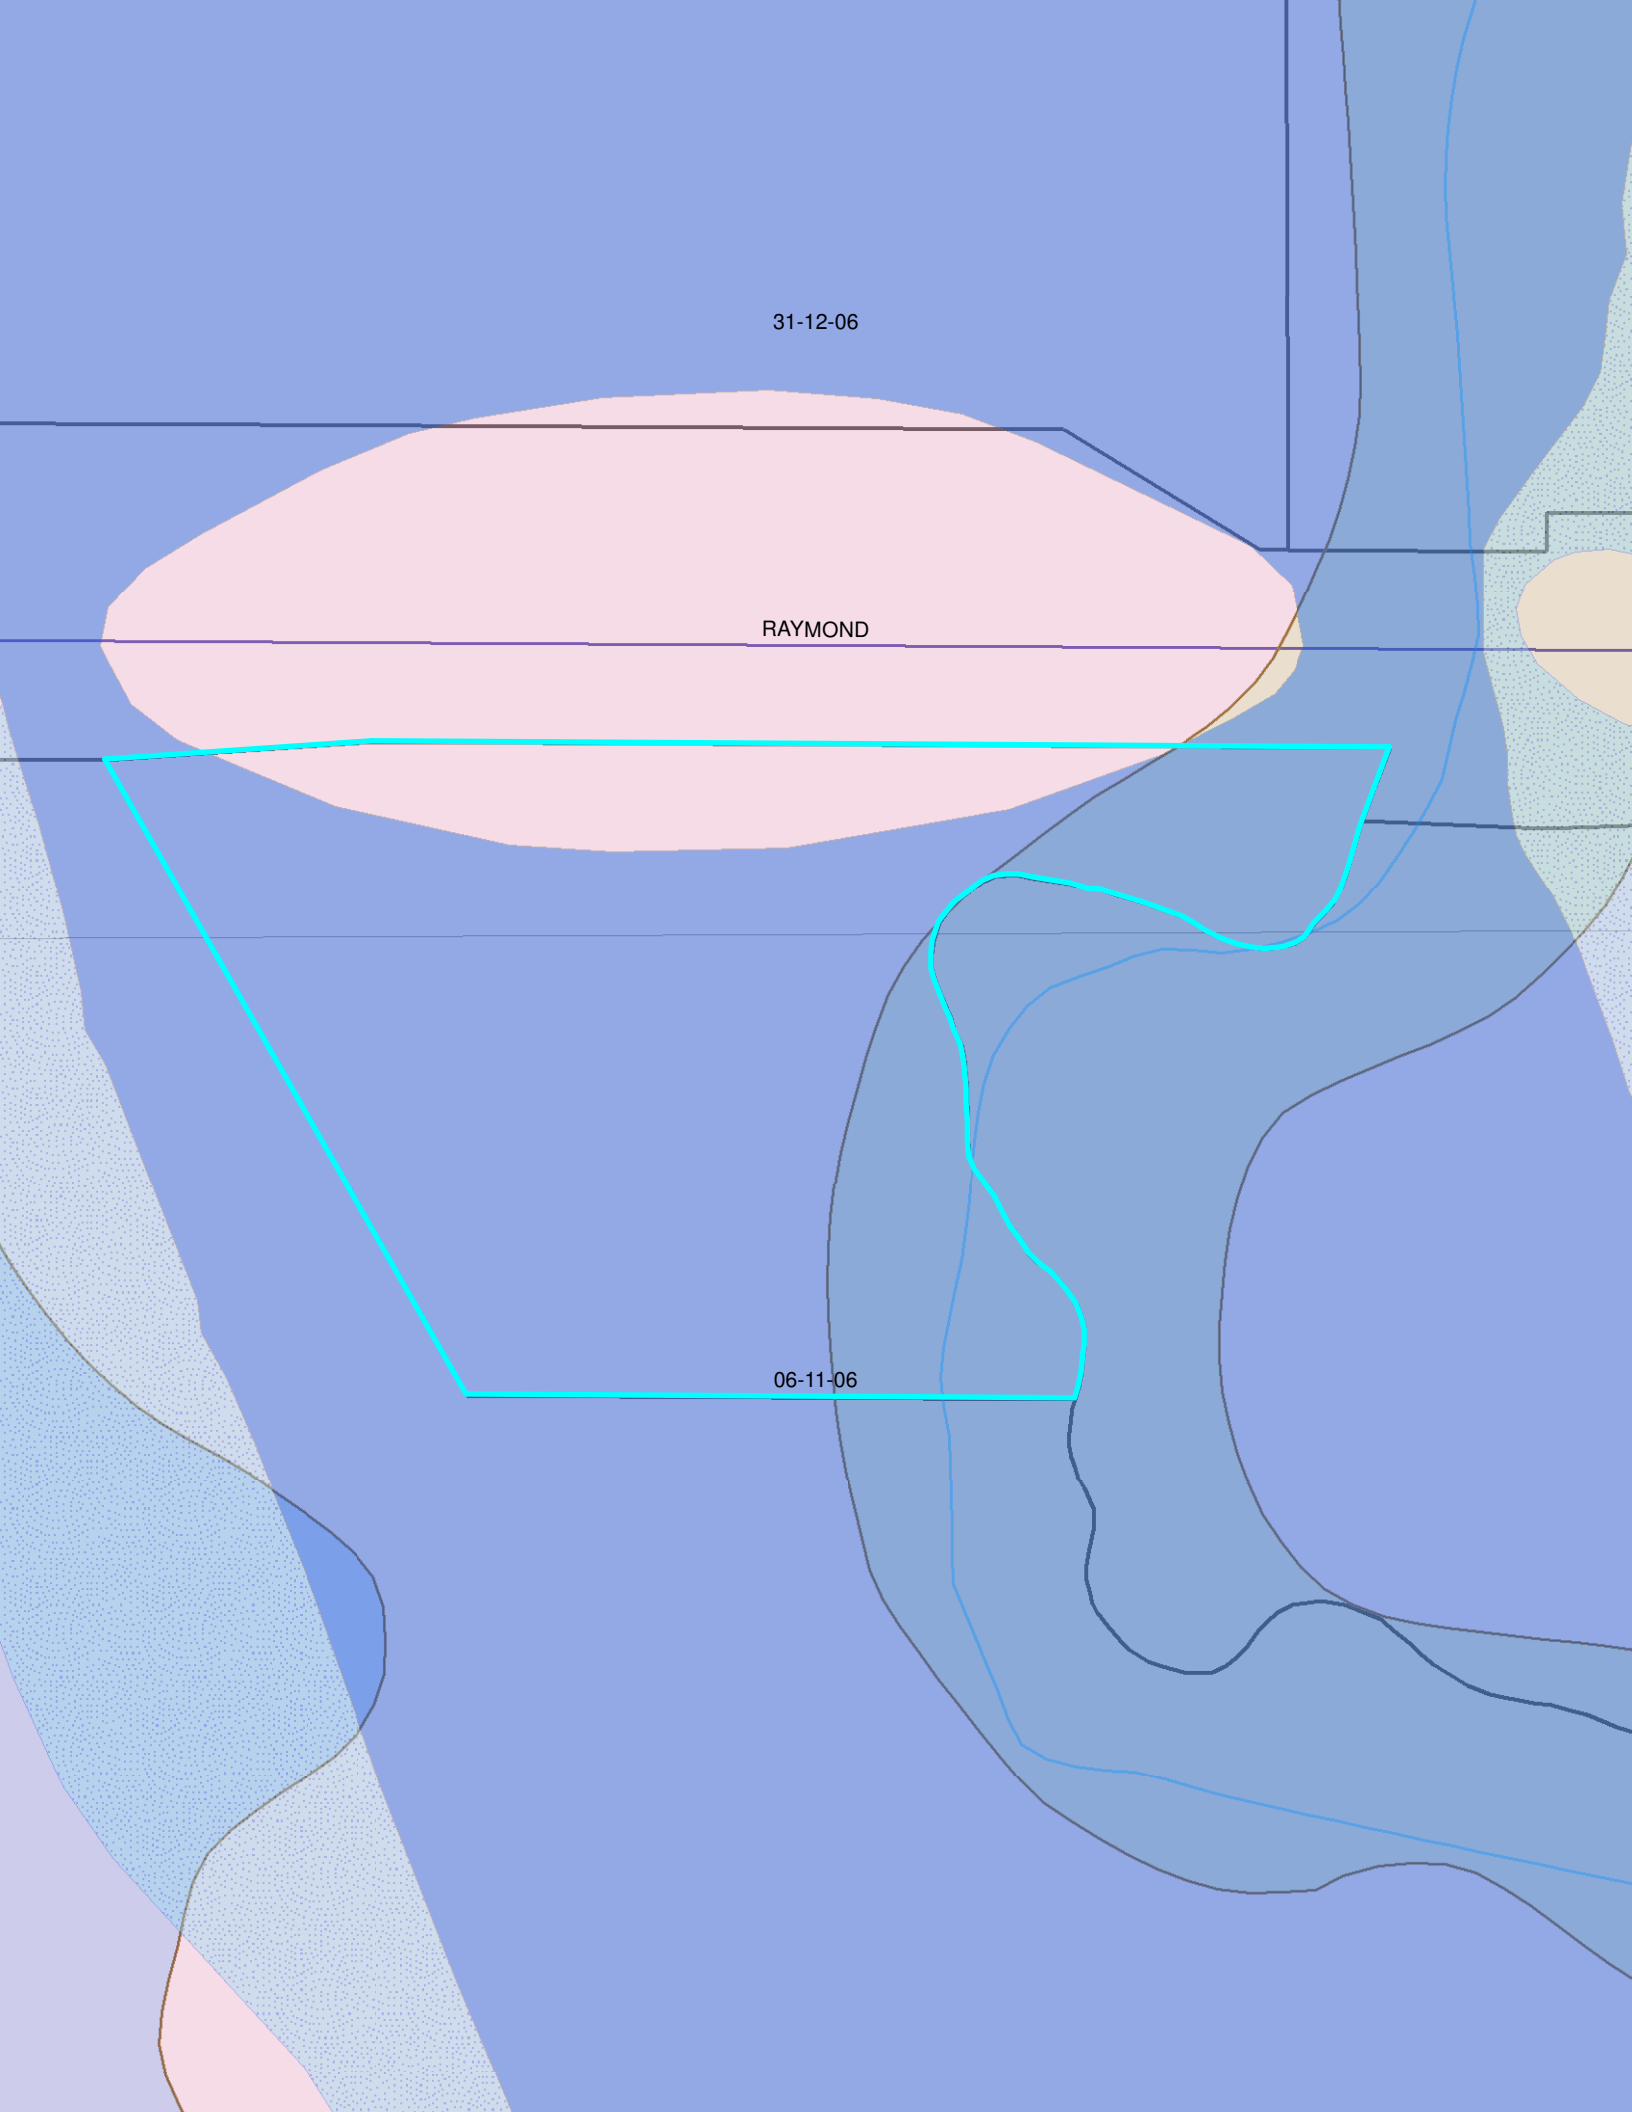
31-12-06
RAYMOND
06-11-06