JAN 29 2015

Application to Alter, Extend or Repair an Onsite Wastewater Treatment System

☐ Municipal Code 24.38 ☐ County Resolution Number 02-30

The undersigned hereby applies for a permit to: ☑ ALTER ☐ EXTEND ☐ REPAIR an existing wastewater treatment system, complying with appropriate Ordinance or Resolution, as marked above with drawings attached.

1. **Legal description of property:**
   Township 8N Range 7E 1/4 ____ 1/4 NE Section 19
   Block ____ Lot 20 & 21 Addition ____
   Parcel ID 15 - 19 - 200 - 064 - 000 (i.e. 99-99-999-999-999)
   Street Address (no rural route) 16531 S. 33rd St Roca, NE 68430

2. **Property use:** ☐ residential ☑ commercial ☐ other use
   Number of bedrooms ____ Describe Domestic Restrooms, 900 GPD, Rola Berry Farm previous permit # HS000349

3. **Type of Present Individual Disposal System** ☑ septic system ☐ lagoon ☐ other

4. **Description of proposed alteration, extension or repair** Add additional 2,000 Gallon tank with Sanitary 'T' in front of existing 1,500 Gallon tank.

5. **Work to be done by:** ☐ owner ☑ contractor's name Lloyd Jakoubek Raymond Contracting, Inc

6. **Estimated project:** a. Repair, replace, or minor extension with a cost less than $400 (no fee required).
   b. Total cost is greater than $400 (Return fee with this application)
   c. A permit is required if the use, operation, location, or type of system is changed.

Print Name Ben Schaefer Address 16531 S. 33rd St, Roca Phone: 402-890-2900

Applicant Signature (owner or lessee) Benjamin Schaefer

Please contact LLCHD for the permit fee for this application
Fee must be included before the application will be processed. Incomplete information will delay processing

---

HEALTH DEPARTMENT USE ONLY

Date received ____/____/____ REVIEW: ☐ Approved ☐ Disapproved By: ____

Site visits
Date ____/____/____ By ____
Date ____/____/____ By ____
Date ____/____/____ By ____

Installation final written approval
Date ____/____/____ By ____

Return application to:

Lincoln-Lancaster County Health Department
Environmental Public Health Division
3140 "N" Street, Lincoln, NE 68510
Phone: 441-8643

Business Office Use Only

Received: Date: 1/29/15 Amount $205.00 Check No. 8572 Initials SB

Revised 3-09

HS001021

Lincoln-Lancaster County Health Department
Environmental Public Health Division (402) 441-8027
3140 N Street Lincoln, Nebraska 68510-1514

ON-SITE WASTE WATER SYSTEM
ALTERATION PERMIT
No. HS001021

System Type: Standard

Situs: 16531 S 38 ST, RURAL, NE

Issued: 1/30/2015

Expires: 1/30/2016

Description: S19, T8, R7, 6th Principal Meridian, LOTS 20 & 21 NE

Owner:

Judith A Halstead

Judith A. Halstead, MS, Health Director

Dear Applicant:

The above document is your permit to alter an existing On-site Waste Water System at the location listed. Please contact this office once the alteration is complete to obtain final approval before use.

Judith A Halstead

Judith A. Halstead, MS
Health Director

RAYMOND CONTRACTING
13800 NW 70TH ST
RAYMOND, NE 68428

SCANNED JAN 29 2015

Application to Alter, Extend or Repair an Onsite Wastewater Treatment System

☐ Municipal Code 24.38 ☐ County Resolution Number 02-30

The undersigned hereby applies for a permit to: ☑ ALTER ☐ EXTEND ☐ REPAIR an existing wastewater treatment system, complying with appropriate Ordinance or Resolution, as marked above with drawings attached.

1. **Legal description of property:**
   Township 8N Range 7E 1/4 ____ 1/4 NE Section 19
   Block ____ Lot 20 & 21 Addition ____
   Parcel ID 15 - 19 - 200 - 004 - 000 (i.e. 99-99-999-999-999)
   Street Address (no rural route) 16531 S. 33rd St Roca, NE 68430

2. **Property use:** ☐ residential ☑ commercial ☐ other use
   Number of bedrooms ____ Describe Domestic Restrooms, 900 GPD, Rockberry Farm previous permit # HS000349

3. **Type of Present Individual Disposal System** ☑ septic system ☐ lagoon ☐ other

4. **Description of proposed alteration, extension or repair** Add additional 2,000 gallon tank with sanitary 'T' in front of existing 1,500 Gallon tank.

5. **Work to be done by:** ☐ owner ☑ contractor's name Lloyd Jakoubek, Raymond Contracting Inc

6. **Estimated project:**
   a. Repair, replace, or minor extension with a cost less than $400 (no fee required).
   b. Total cost is greater than $400 (Return fee with this application)
   c. A permit is required if the use, operation, location, or type of system is changed.

Print Name Ben Schaefer Address 16531 S. 33rd St, Roca Phone: 402-890-2500

Applicant Signature (owner or lessee) Benjamin Schaefer

Please contact LLCHD for the permit fee for this application
Fee must be included before the application will be processed. Incomplete information will delay processing.

HEALTH DEPARTMENT USE ONLY

Date received 1/29/15 REVIEW: ☑ Approved ☐ Disapproved By: ____

Site visits
Date ____/____/____ By ____
Date ____/____/____ By ____
Date ____/____/____ By ____

Installation final written approval
Date 1/30/15 By ____

Return application to:

Lincoln-Lancaster County Health Department
Environmental Public Health Division
3140 "N" Street, Lincoln, NE 68510
Phone: 441-8643

Business Office Use Only

Received: Date: 1/29/15 Amount $205.00 Check No. 8572 Initials SB

Revised 3-09

HS001021

FEB 0 2 2015

D

Lincoln-Lancaster County Health Department
Environmental Public Health Division
3140 "N" Street • Lincoln, NE 68510-1514
Phone: 402-441-8022

Permit Number: HS 000349
HS 01021

Onsite Wastewater Treatment System

As Built Plans & Specifications

Date January 28, 2015 Legal Description NE 1/4 NE 1/4 S19-T8N-R7E Lots 20 & 21
Section Township Range

Onsite System Location

Address (no rural route) 16531 S. 38th St City Roca NE, Zip 68430
Owner Beverly Schaefer Address Same

A. Sewer Pipe

1. Material: SDR 26
   Diameter: 4 in.
2. Distance above basement floor: _____ in.
   or distance below [redacted] floor: 16 in.
3. Distance between dwelling and septic tank: 12 ft.
4. Number of clean-outs: one
5. Distances to: well or suction line 100 ft.
   stream 100 ft.
   pressure line 100 ft.
   property line 100 ft.

B. Septic Tank

☑ Label with Manufacturer, address and gallon capacity
1. Material: 2000 New 1500 old
   Number of compartments: _____
2. Capacity: 3500 gal.
3. Factory built: ☑ Yes ☐ No
4. Manholes: Over inlet, diameter 24 in.
   Over outlet, diameter 24 in.
   Riser: ☐ above ☐ below grade _____ in.
5. Inlet: ☐ baffle ☑ tee ☐ 6" dia. inspection pipe
6. Outlet: ☑ baffle ☐ tee ☐ 6" dia. inspection pipe
7. Depth to top of tank, below unfinished grade: _____ in.
8. Distances to: Well or suction line _____ ft.
   Stream _____ ft.
   Pressure line _____ ft.
   Property line _____ ft.

C. ☐ Distribution Box ☑ Drop Boxes

(≥ 12" inspection opening) (removable lid to inspect)
1. Material: Plastic Endcap New
   Number available outlets: 2 per cap
2. Factory built: ☑ Yes ☐ No
3. Distance from septic tank: 14' ft.


D. Drainfield Absorption


☑ Trench ☐ Bed ☐ Level Bottom
1. Type: ☐ Half rounds ☐ Perforated pipe ☐ Chambers
   Diameter or width: _____
   Number of distribution lines in bed _____
   Material: ☐ fiberglass ☐ plastic ☐ concrete
   ☐ other _____
2. Drainfield Laterals: Number 4
   Length of each line: 20 New ft. old ft.
   old ft. old ft., _____ ft.
3. Drainfield dimensions: Width 40" ft.
   Distribution Pipe Slope Flat in/100 ft.
   Average depth 28" in
4. Filter material: Soil
   Depth of material 20" in.
5. Distances to: Well or suction line 100 ft.
   Pressure line 100 ft.
   Property line 100 ft.
   House or building 100 ft.
   Lake or Stream 100 ft.

Complete As-Built drawing on the back fo this form.

Onsite Wastewater System Design (Example)

Indicate North with Arrow

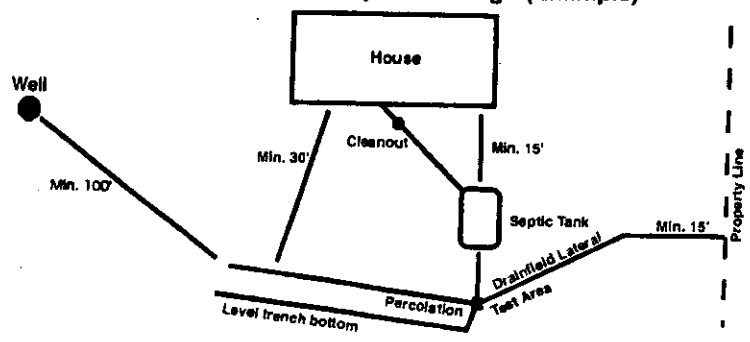

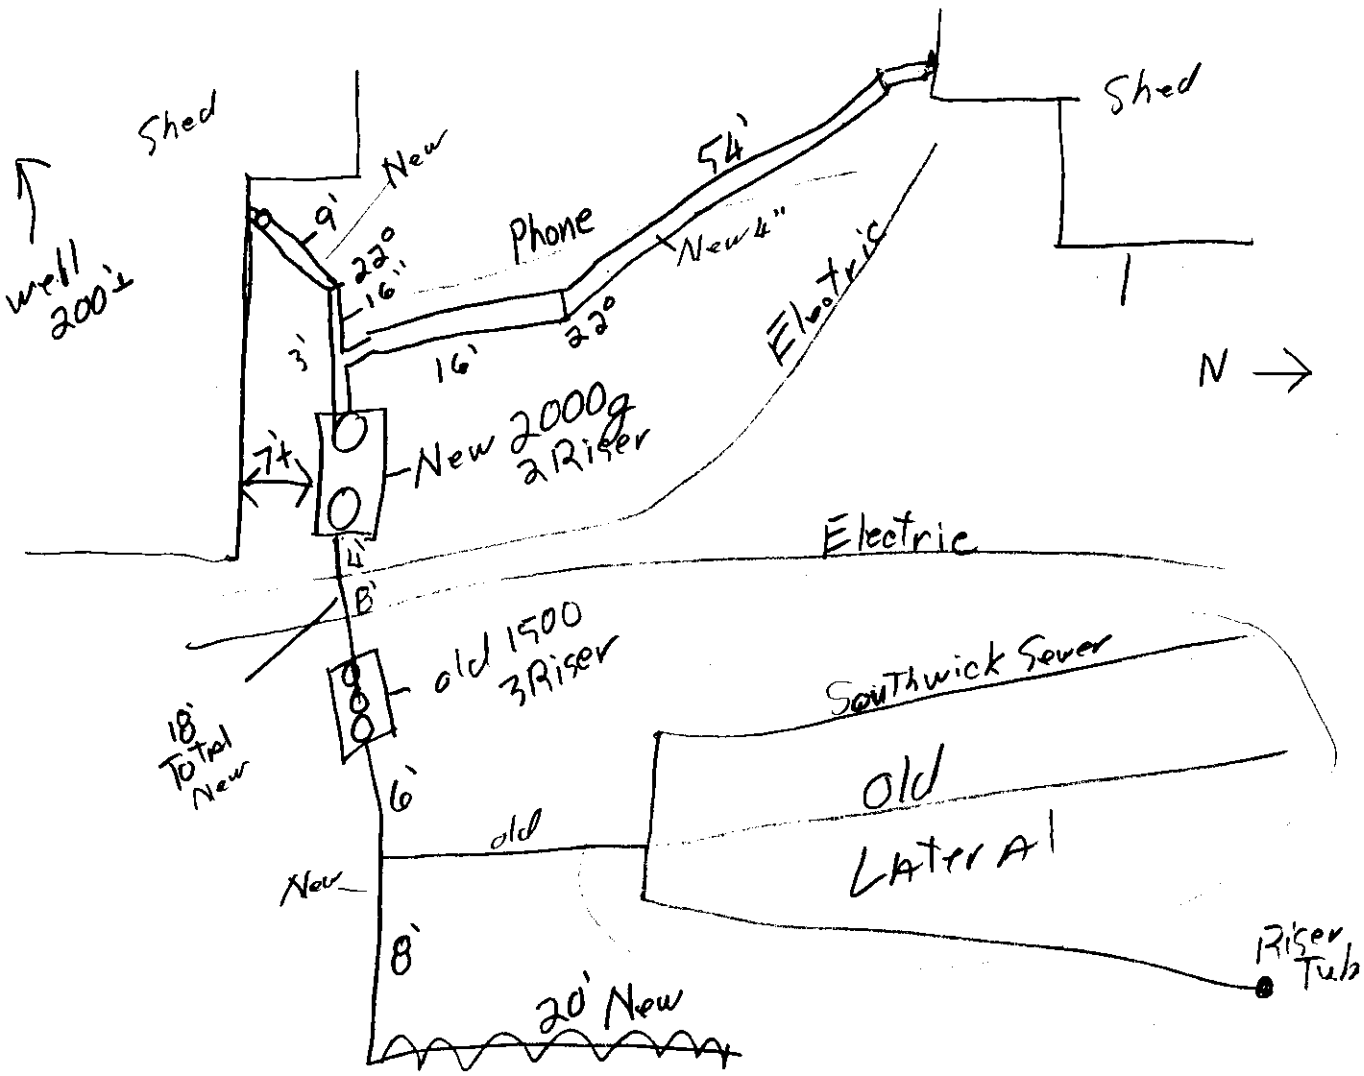

1/28/2015.

Raymond Contracting, Inc.
Lloyd J Jakoubek
13800 NW 70th St
Raymond, NE 68428
402-783-2663