MAR 04 2016

Lincoln-Lancaster County Health Department
Environmental Public Health Division
3140 N Street • Lincoln NE 68510-1514
Phone: 402-441-8643

A

Permit Number
HS001204

Onsite Wastewater Treatment System
Request for Site Clearance and Permit

Include Form B and C.
Submit correct fee
with this Application

3 acres or more required for: ☐ Septic System ☒ Lagoon ☐ Other (Refer to Form C)

The undersigned hereby requests site clearance and permit to construct a Wastewater Treatment System in conformance with appropriate regulations.

PLEASE PRINT OR TYPE

A. Onsite System Location

Address 13600 W Bluff Rd (no rural route) City Malcolm, NE Zip 68402

Legal Description: SW (1/4) 18 (1/4 Section) 11N (Township) 5E (Range) Elk Creek Estates (Subdivison) 3 (Lot)

PID 05-18-301-003-000

B. Owner

Name Synergy Homes, Maria Semerad Signature Maria A Semerad

Address 5410 Nw Fairway Dr. City/State/Zip Lincoln, NE 68521

Home Phone 402-499-3496 Work Phone

C. Certified Installer

Name: Lloyd Jakoubek, Raymond Contracting Inc Signature

Address 13800 NW 70th St City/State/Zip Raymond, NE 68428

Work Phone 402-890-6009 or 402-783-2663

D. Engineer

☐ Check and complete if engineer designed system P.E. License Number:

Designer Name Firm Work Phone

E. This system will serve a

☒ Residential Dwelling Number of Bedrooms 4 Whirlpool Bathtub? ☐ Yes ☒ No Total Acres 4.73

Garbage Grinder? ☒ Yes ☐ No

☐ Commercial Establishment/Other Facility Specify Design flow in gallons per day

Type of Wastewater ☐ Domestic ☐ Non-Domestic

DO NOT WRITE BELOW THIS LINE

Approval Process ☐ Municipal Code 24.38 ☐ County Resolution No. 02-30

1. Health Department
Site visits Date rec'd ACTION ☐ Approved ☐ Disapproved
Date frwd Signature
Comments

2. Supt. Bldg. Insp. or Village Clerk
Comments Date rec'd ACTION ☐ Approved ☐ Disapproved
Date frwd Signature

3. City or County Engineer
Comments Date rec'd ACTION ☐ Approved ☐ Disapproved
Date frwd Signature

Installation Final Written Approval
By
Date

Business Office Use Only
Date Received 3-4-16 Amount Paid $385.00
Received By SB Cash/Check No. 8841

White - Health Department Yellow - Engineer Pink - Building & Safety

Form A Updated 1/13

Lincoln-Lancaster County Health Department
Environmental Public Health Division
3140 "N" Street • Lincoln, NE 68510-1514
Phone: 402-441-8022


C

Permit Number: HS001204

Onsite Wastewater Treatment System

Preliminary Plan Specifications

Draw a plot plan showing onsite system sewer lines, drop of distribution boxes, tank, drainfields, percolation test holes, well, residence, direction of groundwater flow, property lines, and reserve area for replacement onsite system.

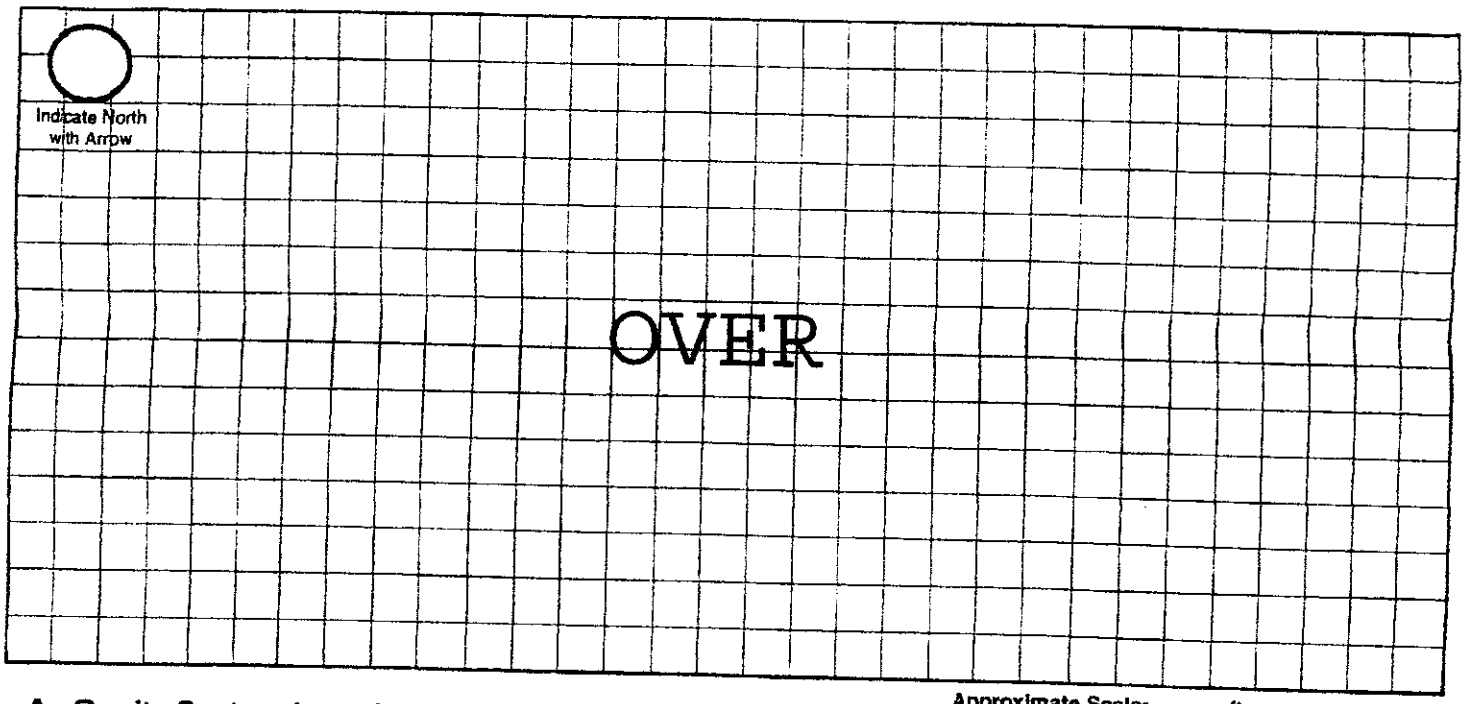

Approximate Scale: _____ft. = _____ grid line/s

A. Onsite System Location

Address (no rural route) 13600 W Bluff Rd City Malcolm NE, Zip 68402

B. Proposed Septic Tank/s

Septic Tank Cap._____ gals Tank Material: ☐ Concrete ☐ Plastic ☐ Other_____ ☒ Lagoon(Max. seepage 1/8" per day)

C. Reserve Area for Replacement Onsite System

☐ Drainfield Absorption Area (percolation test required) ☒ Lagoon

D. Drainfield Absorption System

Percolation Rate_____ (min/inch = mpi) No. of Bedrooms_____ Soil Type_____ Land Slope_____%

☐ Trench ☐ Bed ☐ Non-Standard (engineer designed and NDEQ approved Total Square feet of drainfield_____sq.ft.

Total length of laterals_____ Type of distribution: ☐ Perforated pipe ☐ Half-Round ☐ Chamber ☐ Other

No. of absorption trenches_____ Width_____ No. of drop boxes_____ Distrubtion Box_____

No. of absorption beds_____ Width_____ No of Distribution lines per bed_____

E. Setbacks Check the Boxes Below if the Required Setback has been Satisfied

Distance From	Private Well	Public Well	Surface Water	Gound Water	Pressure Water Lines	Property Lines	Foundations Yours	Foundations Neighbors	All Other Setbacks
Tank (ft)	50 ☐	500 ☐	50 ☐	NA ☐	25 ☐	20 ☐	15 ☐	25 ☐	☐
Field (ft)	100 ☐	500 ☐	50 ☐	4 ☐	30 ☐	20 ☐	30 ☐	40 ☐	☐
Lagoon (ft)	100 ☒	500 ☒	50 ☒	N/A ☒	30 ☒	50 ☒	100 ☒	200 ☒	☒

F. Required Signatures


Home Building Contractor Maria A Semerad Date 2-29-16

Installer Ronald L. Jaeger Date 3-1-16

North ↑

13600 W. Bluff, Malcolm 68402

Legal: Elk Creek Estates, Lot 3

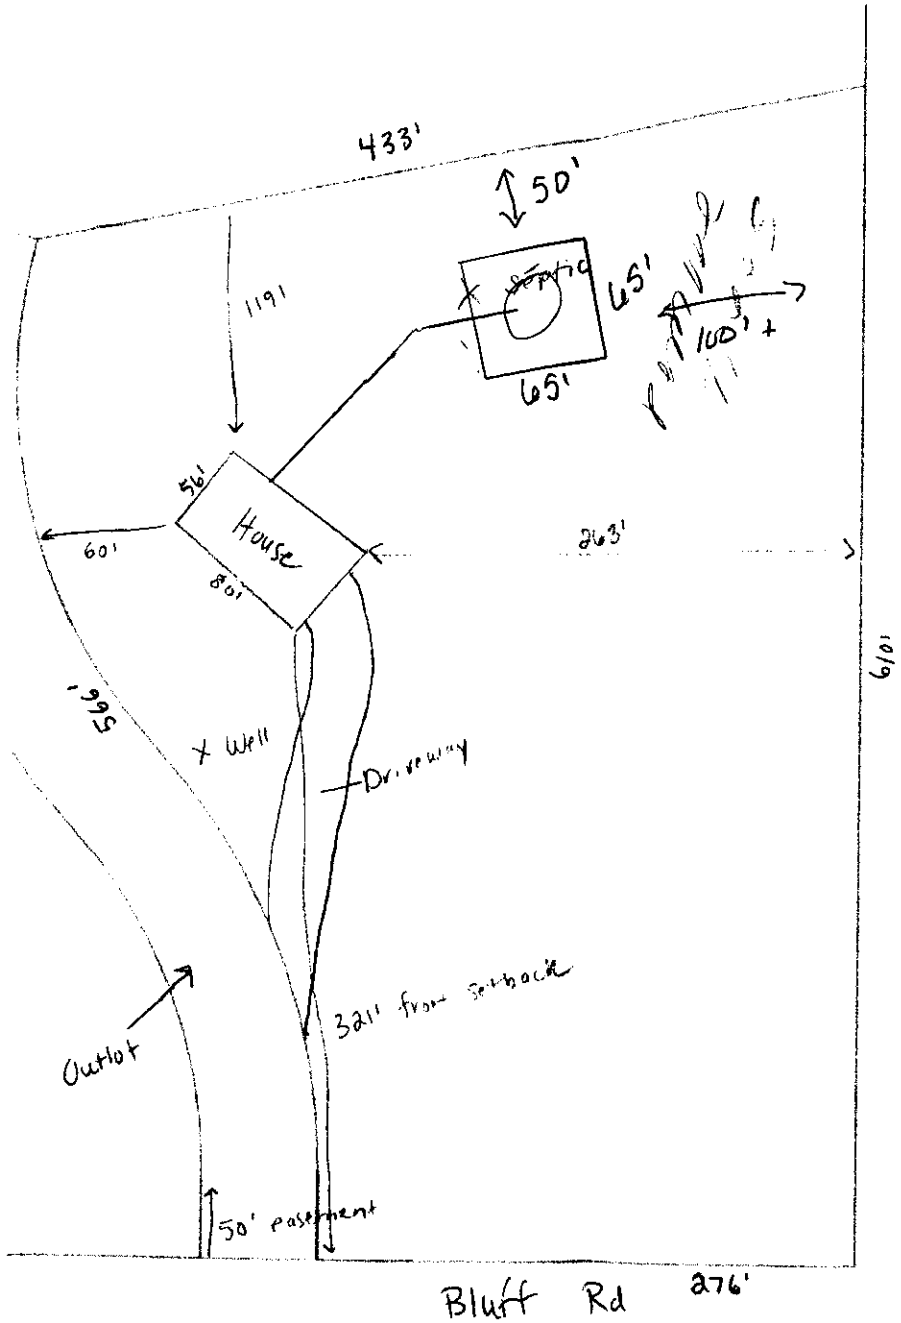

Lincoln-Lancaster County Health Department
Environmental Public Health Division (402) 441-8027
3140 N Street Lincoln, Nebraska 68510-1514

ON-SITE WASTE WATER SYSTEM
CONSTRUCTION - INSTALLATION PERMIT
No. HS001204

System Type: Lagoon

Situs: No Site Address Specified

Issued: 3/9/2016

Expires: 3/9/2017

Description: ELK CREEK ESTATES ADDITION, Lot 3

Owner: SEMERAD, ANDREW J & MARIA A
13600 W BLUFF RD
MALCOLM, NE 68402

Judith A Halstead
Judith A. Halstead, MS, Health Director

Dear Applicant:

The above document is your permit to construct a new On-site Waste Water System at the location listed. Please contact this office once the sytem is complete in order to schedule a final inspection before use.

Judith A Halstead
Judith A. Halstead, MS
Health Director

RAYMOND CONTRACTING
13800 NW 70TH ST
RAYMOND, NE 68428

Lincoln-Lancaster County Health Department
Environmental Public Health Division
3140 N Street • Lincoln NE 68510-1514
Phone: 402-441-8643

OK 7/19/16 gr

Exhibit 5

Permit Number: HS001204

Onsite Wastewater Treatment System

Inspection Sheet

Lot 3

Date 7/19/16 Legal Description ¼ ¼ 18/11/5 Section/Township/Range

Onsite System Location

Address (no rural route) 13740 W. Bluff City

Owner Address

Mark One: ☑ Dwelling ☐ Non-dwelling

☒ New System ☐ Alteration [☐ Tank Only ☐ Trench Only] ☐ Lateral Only

☐ Temporary modification (Describe problem causing discharge and reason for temporary modification):

Drainfield Absorption System:

☐ Lateral ☐ Bed ☐ Non-standard (engineer-designed and NDEQ approved) ☐ Holding Tank ☐ Trench

Total square feet of drainfield 1,755 Installed ~~1,445 required~~ Sq. Ft. Tank Size 1500 gals

Total length of laterals 398' Type of Distribution: ☐ Chamber ☐ Perforated Pipe ☐ Other (describe) Easy Flow

No. of Absorption Laterals 4 Width 3' – 1.5 multiplier for easy flow No. of Drop Boxes Distribution Box 1

Leveling Method Used Laser

Setbacks (Check the Boxes Below if the Required Setback has been Satisfied):

Distance From	Private Well	Public Well	Surface Water	Ground water	Pressure Water Lines	Property Lines
Tank (ft)	50 ☐	500 ☐	50 ☑	NA ☑	10 ☐	5 ☑
Field (ft)	100 ☑	500 ☑	50 ☑	4 ☑	25 ☑	5 ☑

Geographical Coordinates to 6 Decimals:

Tank N/A

Lateral #1 Lateral #3

Lateral #2 Lateral #4

Comments:

Inspections prior to Final Approval
Initial DC Date 7/13/16

Follow-Up Date

Follow-Up Date

Installation Final Written Approval
By Doug Ambs
Date 7/19/16

Field Note Drawing (See Reverse Side):