JUN 10 2016

Lincoln-Lancaster County Health Department
Environmental Public Health Division
3140 N Street • Lincoln NE 68510-1514
Phone: 402-441-8643

A

Permit Number HS001276

Existing Building Site

Onsite Wastewater Treatment System
Request for Site Clearance and Permit

Include Form B and C.
Submit correct fee
with this Application

3 acres or more required for: ☐ Septic System ☒ Lagoon ☐ Other (Refer to Form C)

The undersigned hereby requests site clearance and permit to construct a Wastewater Treatment System in conformance with appropriate regulations.

PLEASE PRINT OR TYPE

A. Onsite System Location

Address 10500 Yankee Hill Rd (no rural route) City Lincoln, NE Zip 68526

Legal Description SE 24 9N 7E 37
1/4 1/4 Section Township Range Subdivison Addition Block Lot

PID 16-24-400-001-000

B. Owner

Name Jason Steele Signature

Address 3241 Browning St City/State/Zip Lincoln, NE 68516

Home Phone 402-202-7447 Work Phone

C. Certified Installer

Name: Lloyd Jakoubek, Raymond Contracting Inc Signature

Address 13800 NW 70th St City/State/Zip Raymond, NE 68428

Work Phone 402-890-6009 or 402-783-2663

D. Engineer ☐ Check and complete if engineer designed system P.E. License Number:

Designer Name Firm Work Phone

E. This system will serve a

☐ Residential Dwelling Number of Bedrooms Whirlpool Bathtub? ☐ Yes ☐ No Total Acres 39.24
Garbage Grinder? ☐ Yes ☐ No

☒ Commercial Establishment/Other Facility Specify Barn with restrooms Design flow in gallons per day <200

Type of Wastewater ☒ Domestic ☐ Non-Domestic

DO NOT WRITE BELOW THIS LINE

Approval Process ☐ Municipal Code 24.38 ☐ County Resolution No. 02-30

1. Health Department ACTION ☐ Approved ☐ Disapproved
Site visits Date rec'd Signature
Date frwd
Comments

2. Supt. Bldg. Insp. or Village Clerk ACTION ☐ Approved ☐ Disapproved
Comments Date rec'd Signature
Date frwd

3. City or County Engineer ACTION ☐ Approved ☐ Disapproved
Comments Date rec'd Signature
Date frwd

Installation Final Written Approval
By
Date

Business Office Use Only
Date Received 6-10-16 Amount Paid $385.00
Received By SB Cash/Check No 8924

White - Health Department Yellow - Engineer Pink - Building & Safety

Form A Updated 1/13

Lincoln-Lancaster County Health Department
Environmental Public Health Division
3140 "N" Street • Lincoln, NE 68510-1514
Phone: 402-441-8022


C

Permit Number: HS001276

Onsite Wastewater Treatment System

Preliminary Plan Specifications

Draw a plot plan showing onsite system sewer lines, drop of distribution boxes, tank, drainfields, percolation test holes, well, residence, direction of groundwater flow, property lines, and reserve area for replacement onsite system.

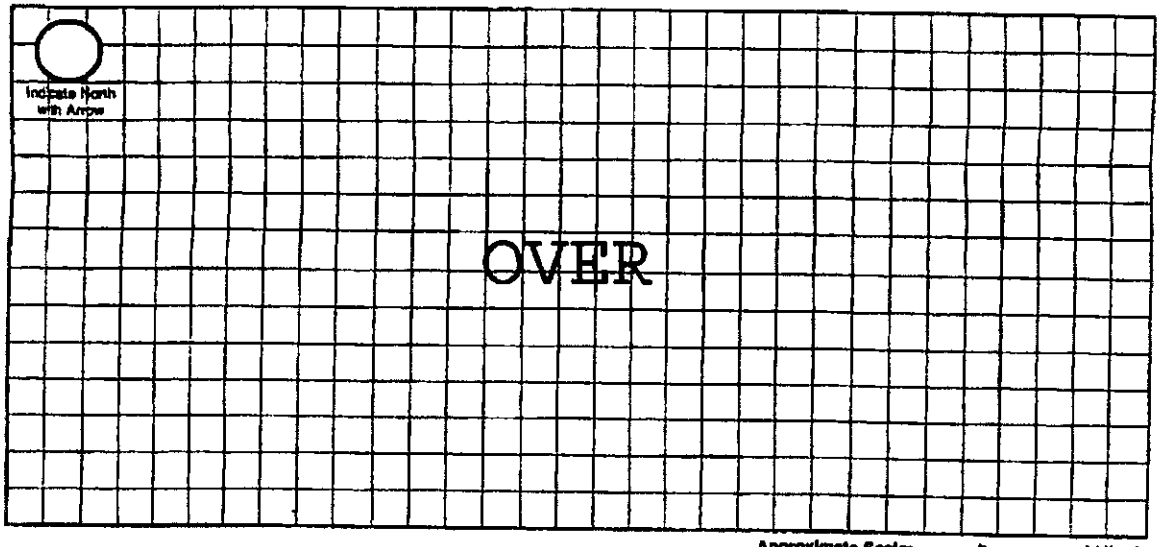

Approximate Scale: _____ ft. = _____ grid line/s

A. Onsite System Location

Address (no rural route) 10500 Yankee Hill Rd City Lincoln NE, Zip 68526

B. Proposed Septic Tank/s

Septic Tank Cap._____ gals Tank Material: ☐ Concrete ☐ Plastic ☐ Other_____ ☒ Lagoon(Max. seepage 1/8" per day)

C. Reserve Area for Replacement Onsite System

☐ Drainfield Absorption Area (percolation test required) ☒ Lagoon

D. Drainfield Absorption System

Percolation Rate_____ (min/inch = mpi) No. of Bedrooms _____ Soil Type_____ Land Slope_____%

☐ Trench ☐ Bed ☐ Non-Standard (engineer designed and NDEQ approved Total Square feet of drainfield_____sq.ft.

Total length of laterals_____ Type of distribution: ☐ Perforated pipe ☐ Half-Round ☐ Chamber ☐ Other

No. of absorption trenches_____ Width_____ No. of drop boxes_____ Distrubtion Box_____

No. of absorption beds_____ Width_____ No of Distribution lines per bed_____


E. Setbacks Check the Boxes Below if the Required Setback has been Satisfied

Distance From	Private Well	Public Well	Surface Water	Gound Water	Pressure Water Lines	Property Lines	Foundations Yours	Foundations Neighbors	All Other Setbacks
Tank (ft)	50 ☐	500 ☐	50 ☐	NA ☐	25 ☐	20 ☐	15 ☐	25 ☐	☐
Field (ft)	100 ☐	500 ☐	50 ☐	4 ☐	30 ☐	20 ☐	30 ☐	40 ☐	☐
Lagoon (ft)	100 ☒	500 ☒	50 ☒	N/A ☒	30 ☒	50 ☒	100 ☒	200 ☒	☒

F. Required Signatures

Home Building Contractor _____ Date 6-8-2016

Installer _____ Date 6/8/16

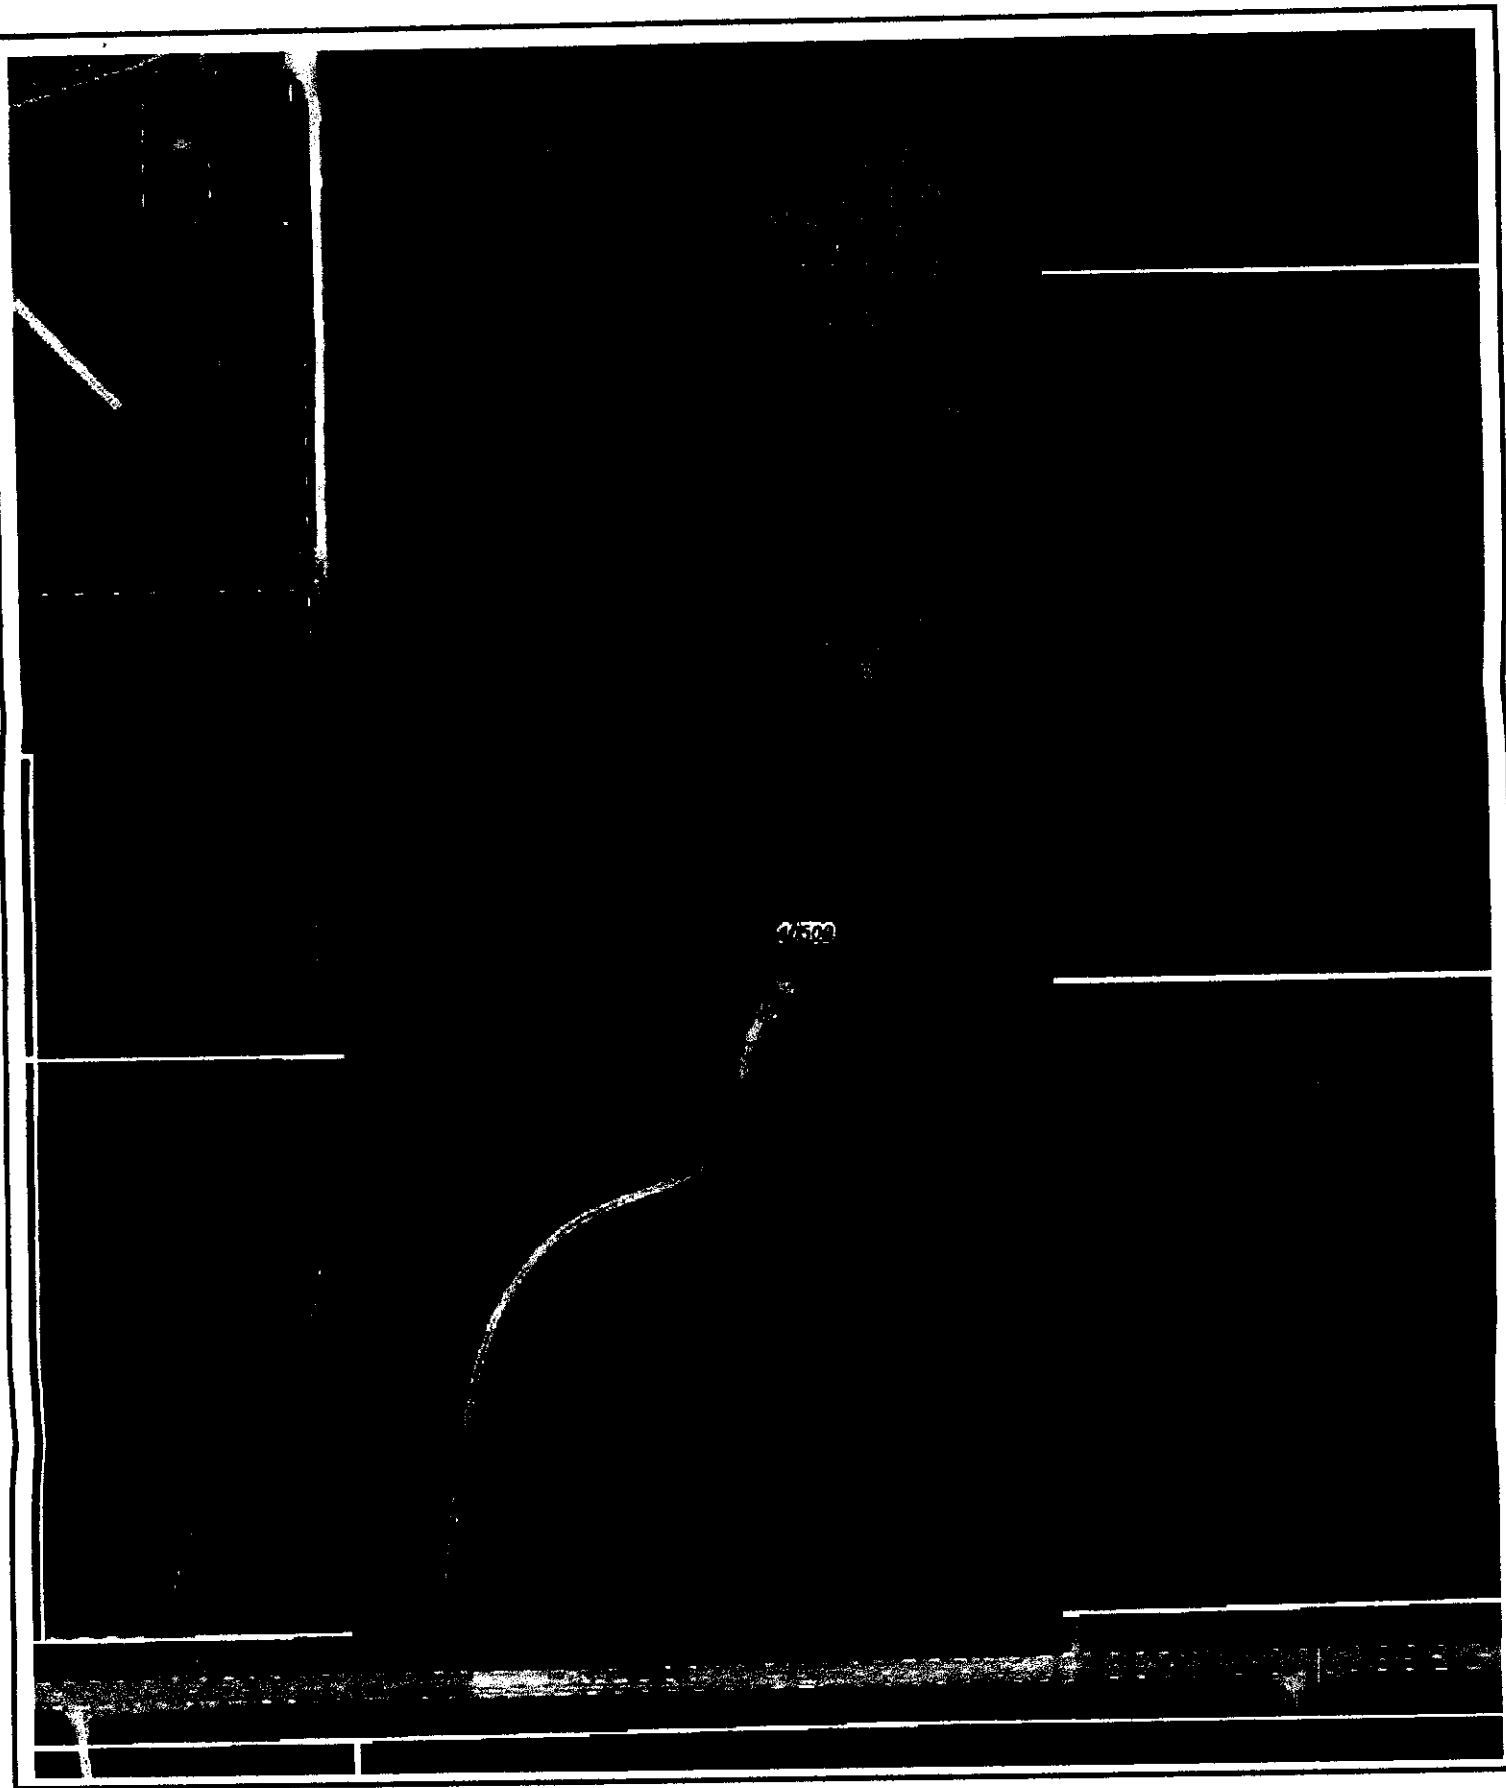

Lancaster County/City of Lincoln GIS Map

N
W E
S

Jason Steele 402-202-7447 10500 Yankee Hill Rd, Lincoln, NE 68526

Printed: May 26, 2016

DISCLAIMER: The information is presented on a best-efforts basis, and should not be relied upon for making financial, survey, legal or other commitments. If you have questions or comments regarding the data displayed on this map, please email ags@lincoln.ne.gov and you will be directed to the appropriate department.

Lincoln-Lancaster County Health Department
Environmental Public Health Division (402) 441-8027
3140 N Street Lincoln, Nebraska 68510-1514

ON-SITE WASTE WATER SYSTEM
CONSTRUCTION - INSTALLATION PERMIT
No. HS001276

System Type: Lagoon

Situs: 10500 YANKEE HILL RD, RURAL, NE

Issued: 6/14/2016

Expires: 6/14/2017

Description: S24, T9, R7, 6th Principal Meridian, LOT 37 SE

Owner: STRANGHOENER FAMILY FARMS
LLC
3241 BROWNING ST
LINCOLN, NE 68516

Judith A Halstead
Judith A. Halstead, MS, Health Director

Dear Applicant:

The above document is your permit to construct a new On-site Waste Water System at the location listed. Please contact this office once the sytem is complete in order to schedule a final inspection before use.

Judith A Halstead
Judith A. Halstead, MS
Health Director

RAYMOND CONTRACTING
13800 NW 70TH ST
RAYMOND, NE 68428

9-7-24

D Exhibit 4

Lincoln-Lancaster County Health Department
Environmental Public Health Division
[illegible] Street • Lincoln NE 68510-1514
Phone: 402-441-8643

Permit Number: H50012716

Onsite Wastewater Treatment System
As-Built Description and Drawing

Type of Onsite Wastewater System: ☒ Lagoon (Skip to Back Page) ☐ Subsurface Septic ☐ Mound

Onsite Wastewater System Location PID 16-24-400-001-000

Address or Legal Description or Parcel Identification Number (PID) 10500 Yankee Hill Rd Lincoln, NE 68526

Owner: Jason Steele Address 3241 Browning St Lincoln, NE 68516

A. Wastewater Piping

1. Material: SDR 26 Diameter: 4 in.
2. Distance between dwelling and ~~septic tank~~ LAGOON: 350 ft.

B. Septic Tank

1. Material _____
2. Capacity: _____
3. Depth to top of tank, below unfinished grade: ____ in.
4. Distance to:
   Well _____ ft.
   Pressure line _____ ft.
   Property Line _____ ft.
   Foundation _____ ft.

C Distribution Box or Drop Box

Distance and Direction from septic tank: _____ ft. _____

D. Drainfield/Absorption Field

☐ Trench ☐ Bed

1. Type: ☐ Perforated Pipe ☐ Chamberless ☐ Other
   Material brand and inside width of Chamberless: _____
2. Number of Laterals: _____
3. Length of each lateral (linear): ft._____ ft._____ ft._____ ft._____
4. Drainfield size: _____ sq. ft.
5. Distance to:
   Well _____ ft.
   Pressure line _____ ft.
   Property line _____ ft.
   Depth of Groundwater _____


Was the Onsite Wastewater System covered prior to LLCHD inspection? ☒ Yes ☐ No partially

If Yes, the Certified Professional must sign below for final approval:

I swear and affirm that the system complies with Lincoln Municipal Code (LMC) 24.38 and/or County Resolution R-13-0062 requirements and that the information and documentation submitted are true and accurate.

Certified Professional Signature: Kevin L. Jahnke Date: 6/20/16

Complete As-Built drawing on the back of this form.

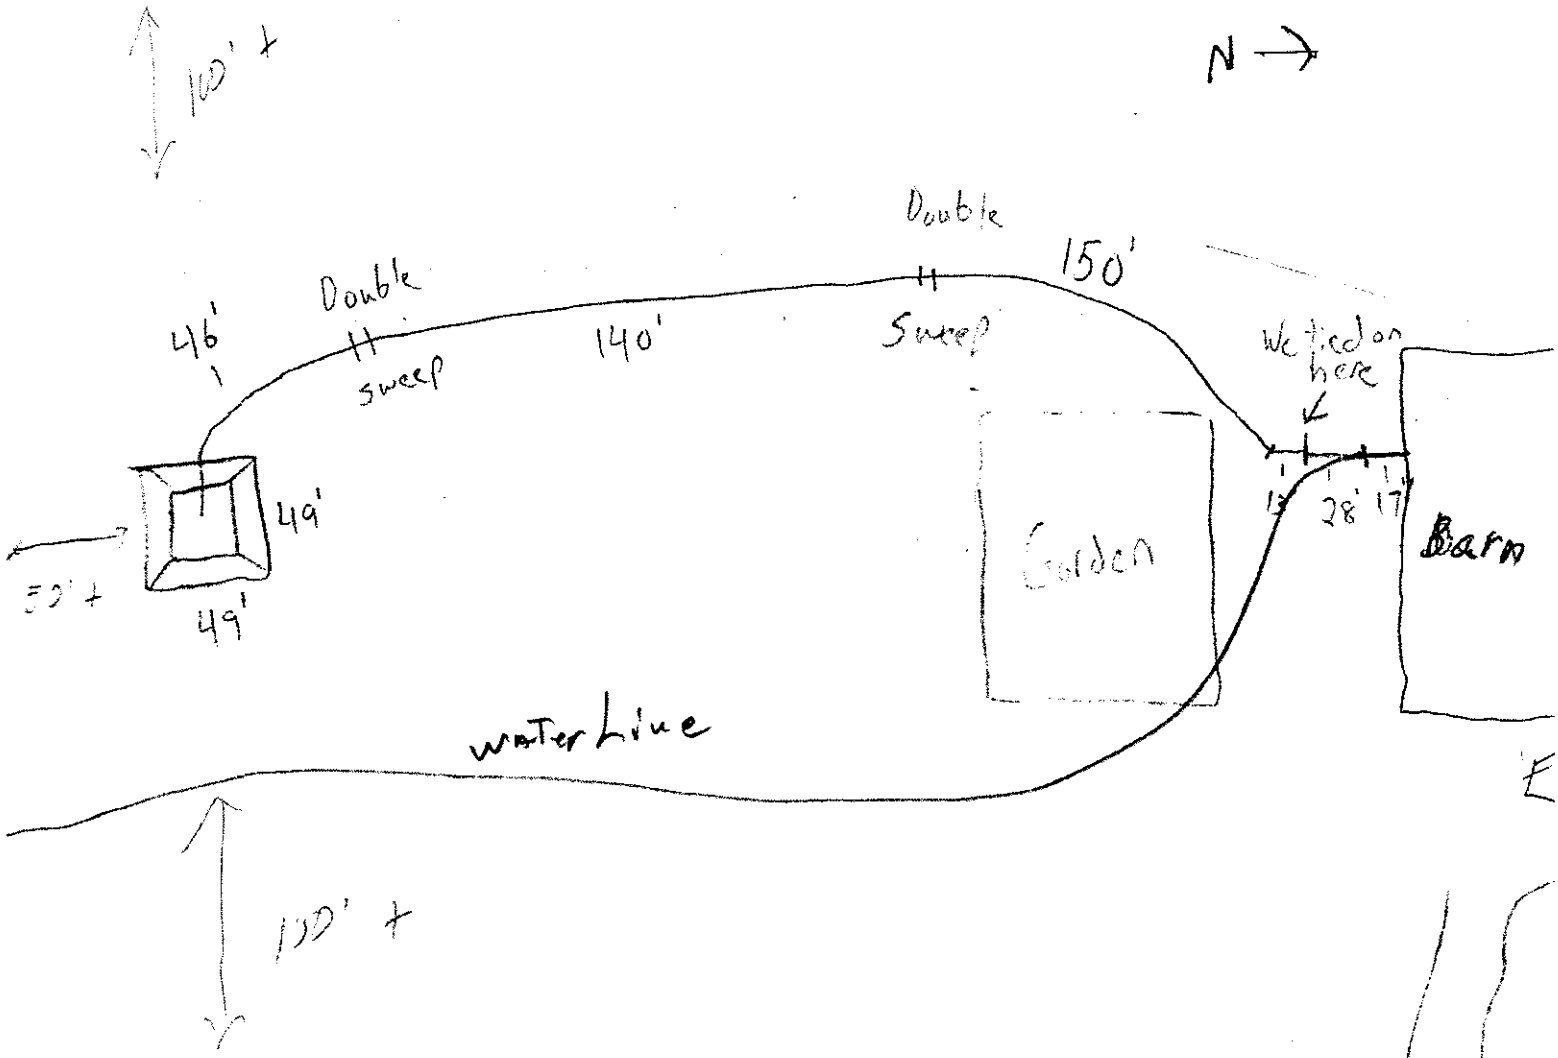

Raymond Contracting, Inc.
Lloyd J Jakoubek
13800 NW 70th St
Raymond, NE 68428
402-783-2663

6/20/16

No Well - Rural Water

Lincoln-Lancaster County Health Department
Environmental Public Health Division
3140 N Street • Lincoln NE 68510-1514
Phone: 402-441-8643

Exhibit 6

Permit Number: H500 1276

Onsite Wastewater Treatment System-Lagoon

Inspection Sheet

Date 7/20/16 Legal Description ¼ ¼ 24 / 9 / 7 Lot 37
Section/Township/Range

Onsite System Location

Address (no rural route) 10500 Yankee Hill Rd City _____

Owner _____ Address _____

Mark One: ☐ Dwelling ☒ Non-dwelling

☒ New System ☐ Repair

☐ Temporary modification (Describe problem causing discharge and reason for temporary modification): _____

Lagoon constructed so not to receive surface water	Yes ✓ No ___
Lagoon floor is level	Yes ✓ No ___
Lagoon is equipped with a depth gage/concrete slab	Yes ✓ No ___
Influent line is at least 4 inches and slopes no less than 1/8 inch	
Clean outs located every 75 feet and one located 1 foot about highest water level	Yes ✓ No ___
Inside slope not steeper than three horizontal to one vertical	Yes ✓ No ___
Minimum width of the top of the dike shall be 4 feet	Yes ✓ No ___ Needs fence
Fence installed	Yes ✓ No ___

Top of the Dike 43' Bottom of Lagoon 37' Design Flow 150 gpd

NH 11/4/16

Setbacks (Check the Boxes Below if the Required Setback has been Satisfied):

Surface Water distance from Water Mark	Private Drinking Water Wells	Public Drinking Water Supply Wells		All Other Water Wells	Property Lines	Trees and Brush	Neighbor's Foundation		All Other Setbacks
50 ft ☒	100 ft ☐	Non-Community	100ft ☐	100ft ☒	50ft ☒	50ft ☐	Class 1	200ft ☐	☒
		Community	* ☒				Class 2	200ft ☐	
							Class 3	100ft ☒	

*Evaluated by a professional engineer for potential impact on the well and submitted to Dept. for approval if less than 1000ft.

Geographical Coordinates to 6 Decimals: N/A

Dike North side

Comments: Fence installed - NH

Inspections prior to Final Approval
Initial _____ Date 7/20/16
Follow-Up NH Date 11/4/16
Follow-Up _____ Date _____
Installation Final Written Approval
By _____
Date 11/4/16

Updated 4/15