Lincoln-Lancaster County Health Department
Environmental Public Health Division
3140 N Street • Lincoln NE 68510-1514
Phone: 402-441-8643

A

Permit Number HS001742

New Construction
Restrooms for Cemetery

Onsite Wastewater Treatment System Request for Site Clearance and Permit

Include Form B and C. Submit correct fee with this Application

3 acres or more required for: ☑ Septic System ☐ Lagoon ☐ Other (Refer to Form C)

The undersigned hereby requests site clearance and permit to construct a Wastewater Treatment System in conformance with appropriate regulations.

PLEASE PRINT OR TYPE

A. Onsite System Location

Address 7610 NW 112th St (no rural route) City Malcolm, NE Zip 68402

Legal Description SW (1/4) 28 (Section) 11N (Township) 5E (Range) ____ (Subdivison) ____ (Addition) 33 (Block) ____ (Lot)

PID 05-28-300-022-000

B. Owner

Name United Yezidi Community of America Inc. Signature Salih Bashki

Address 305 W Belmont Ave City/State/Zip Lincoln, NE 68521

Home Phone 402-310-3703 (Khalaf Yeszitty - Translater) Work Phone ____

C. Certified Installer

Name: Lloyd Jakoubek, Raymond Contracting Inc Signature [signature]

Address 13800 NW 70th St City/State/Zip Raymond, NE 68428

Work Phone 402-890-6009 or 402-783-2663

D. Engineer

☐ Check and complete if engineer designed system P.E. License Number: ____

Designer Name ____ Firm ____ Work Phone ____

E. This system will serve a

☐ Residential Dwelling Number of Bedrooms ____ Whirlpool Bathtub? ☐ Yes ☐ No Total Acres 20.01

Garbage Grinder? ☐ Yes ☐ No

☑ Commercial Establishment/Other Facility Specify Restroom facility for Cemetery Design flow in gallons per day 240

Type of Wastewater ☑ Domestic ☐ Non-Domestic (maximum 60 people, 4 gpd per person)

DO NOT WRITE BELOW THIS LINE

Approval Process ☐ Municipal Code 24.38 ☐ County Resolution No. 02-30

1. Health Department
Site visits ____ Date rec'd ____ Date frwd ____
Comments ____
ACTION ☐ Approved ☐ Disapproved Signature ____

2. Supt. Bldg. Insp. or Village Clerk
Comments ____ Date rec'd ____ Date frwd ____
ACTION ☐ Approved ☐ Disapproved Signature ____

3. City or County Engineer
Comments ____ Date rec'd ____ Date frwd ____
ACTION ☐ Approved ☐ Disapproved Signature ____

Installation Final Written Approval
By ____
Date ____

Business Office Use Only
Date Received 9-26-19 Amount Paid $405
Received By JKO Cash/Check No. 9492

White - Health Department Yellow - Engineer Pink - Building & Safety

Form A Updated: 1/13

Lincoln-Lancaster County Health Department (LLCHD)
Environmental Public Health Division
3140 "N" Street • Lincoln, NE 68510-1514
Phone: 402-441-8022

B

Permit Number:

Onsite Wastewater Treatment System

Soil Evaluation Report

PLEASE PRINT OR TYPE

Onsite System Location

Address 7610 NW 112th St (no rural route) City Malcolm NE, Zip 68402

Owner United Yezidi Community of America Address 305 W Belmont Ave, Lincoln, NE 68521

Date of Tests 8/27/18 to 8/28/18 Weather: Precipitation 0 Temperature 76°

Percolation Test Data Table

A.	B.	C. D. E. F. Saturation/Swelling Time				G. H. I. J. K. Water Level Drop Last 30 mins of 4 hr or last 10 mins of 1 hr					L. M. N. Results		
		Start		End		Start		Initial	End				
Hole No.	Hole Depth (in)	Date (Mo/Da)	Time (Hr/Min)	Date (Mo/Da)	Time (Hr/Min)	Date (Mo/Da)	Time (Hr/Min)	Water Lev (in.)	Date (Mo/Da)	Time (Hr/Min)	Elapsed Time Interval	Water Level Drop (in)	Percolation Rates (Min/in = mpi)
1	20	8/27	9:45a	8/27	1:45p	8/28	12:00p	6	8/28	12:30p	30	1-5/8	18
2	24	"	"	"	"	"	"	6	"	"	"	1-1/4	24
3	20	"	"	"	"	"	"	6	"	"	"	1-1/8	27
4	24	"	"	"	"	"	"	6	"	"	"	2-1/8	14
								6					
								6					
								6					
								6					

Person Conducting Percolation Test

Name: Terri L Jakoubek, Raymond Contracting, Inc.

Phone: 402-783-2663 or 402-890-6009

Address 13800 NW 70th St

Raymond, NE 68428 Cert #1198

Sum of Percolation Rates: 83

Average of Rates: 21

Rate Used for Calculation: 21

Soil type (NRCS Maps/Other) Judson SL

Groundwater Depth >8'

DO NOT WRITE BELOW THIS LINE

Reviewing Action

Comments (Soil type, groundwater, floodplain, etc.)

Signature of Reviewing Official Date

Lincoln-Lancaster County Health Department
Environmental Public Health Division
3140 "N" Street • Lincoln, NE 68510-1514
Phone: 402-441-8022


C

Permit Number:

Onsite Wastewater Treatment System

Preliminary Plan Specifications

Draw a plot plan showing onsite system sewer lines, drop of distribution boxes, tank, drainfields, percolation test holes, well, residence, direction of groundwater flow, property lines, and reserve area for replacement onsite system.

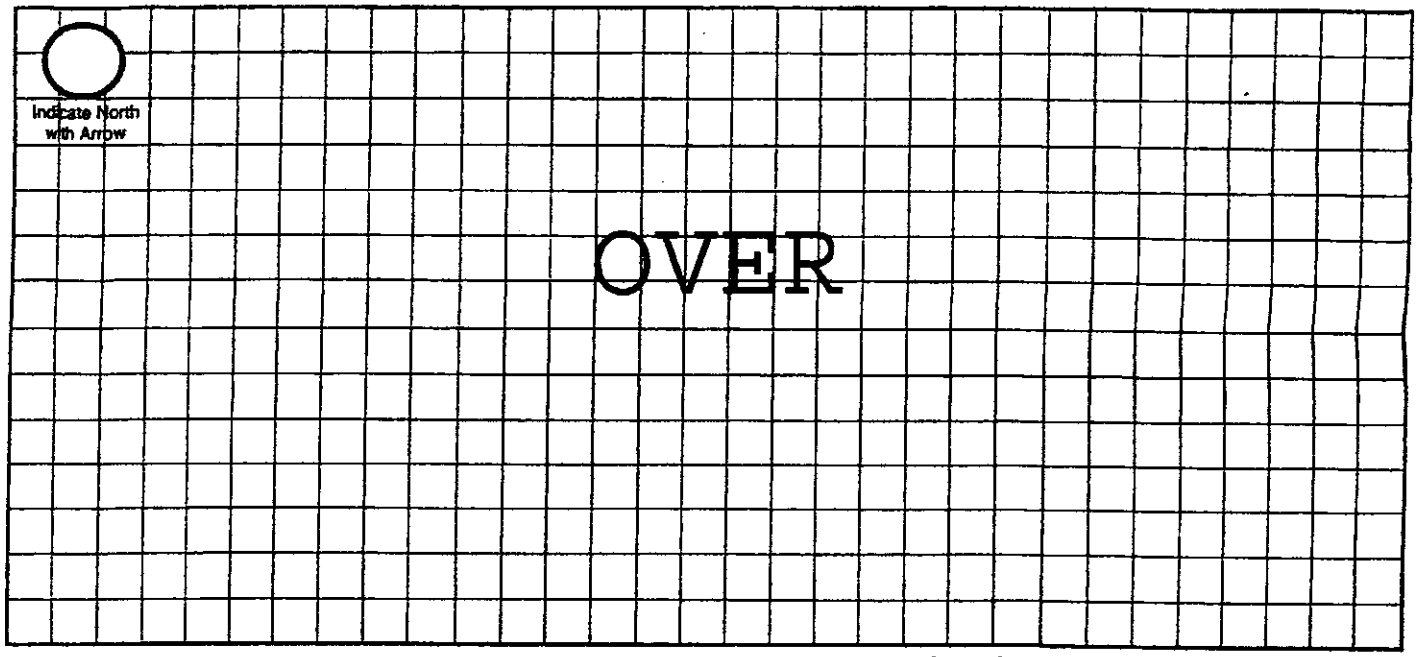

Approximate Scale: _____ft. = _____ grid line/s

A. Onsite System Location

Address (no rural route) 7610 NW 112th St City Malcolm NE, Zip 68402

B. Proposed Septic Tank/s

Septic Tank Cap. 2000 gals Tank Material: ☒ Concrete ☐ Plastic ☐ Other_____ ☐ Lagoon(Max. seepage 1/8" per day)

C. Reserve Area for Replacement Onsite System

☐ Drainfield Absorption Area (percolation test required) ☒ Lagoon

D. Drainfield Absorption System

Percolation Rate 21 (min/inch = mpi) No. of Bedrooms 240 gpd Soil Type Judson SL Land Slope_____%

☒ Trench ☐ Bed ☐ Non-Standard (engineer designed and NDEQ approved Total Square feet of drainfield 720 sq.ft.

Total length of laterals 160 Type of distribution: ☐ Perforated pipe ☐ Half-Round ☐ Chamber ☒ Other EZFlow 1203H

No. of absorption trenches_____ Width 40" No. of drop boxes 1 Distrubtion Box_____

No. of absorption beds_____ Width_____ No of Distribution lines per bed_____

E. Setbacks Check the Boxes Below if the Required Setback has been Satisfied

Distance From	Private Well	Public Well	Surface Water	Gound Water	Pressure Water Lines	Property Lines	Foundations Yours	Foundations Neighbors	All Other Setbacks
Tank (ft)	50 ☒	500 ☒	50 ☒	NA ☒	25 ☒	20 ☒	15 ☒	25 ☒	☒
Field (ft)	100 ☒	500 ☒	50 ☒	4 ☒	30 ☒	20 ☒	30 ☒	40 ☒	☒
Lagoon (ft)	100 ☐	500 ☐	50 ☐	N/A ☐	30 ☐	50 ☐	100 ☐	200 ☐	☐


F. Required Signatures

Home Building Contractor Todd Bowden Date 9/19/18

Installer Ryan L. Johnston Date 9/23/18

GIS Viewer

City of Lincoln\Lancaster County GIS Map **Customer Initials** SR

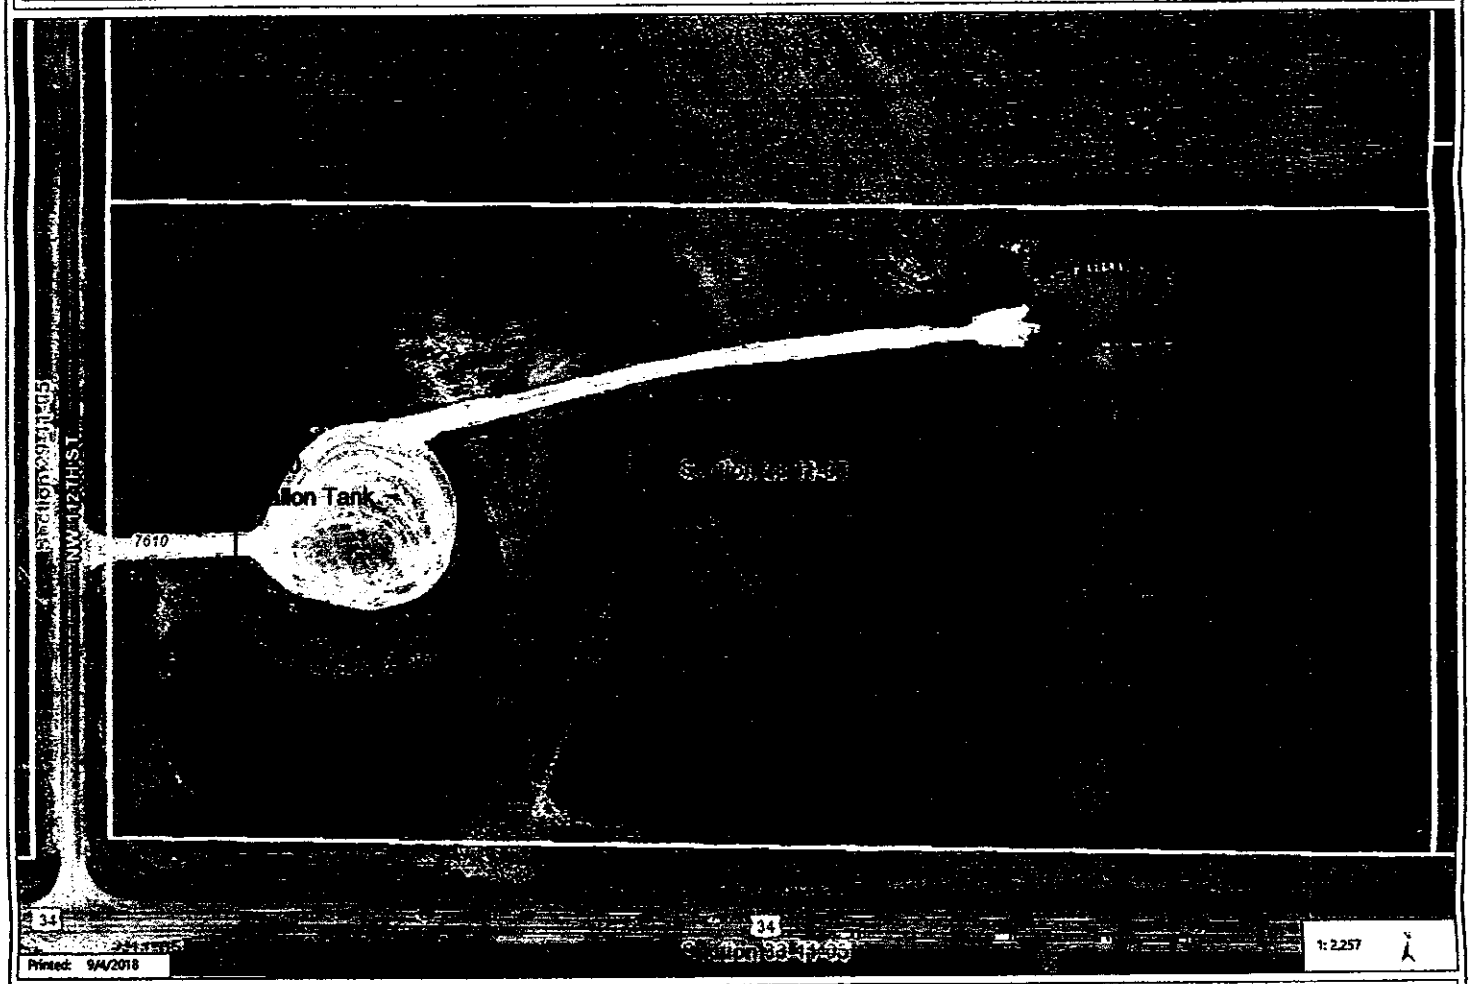

Printed: 9/4/2018

Disclaimer: The information is presented on a best-efforts basis, and should not be relied upon for making financial, survey, legal or other commitments. If you have questions or comments regarding the data displayed on this map, please email assessor@lancaster.ne.gov and you will be directed to the appropriate department.

Lincoln-Lancaster County Health Department
Environmental Public Health Division (402) 441-8027
3131 O Street Lincoln, Nebraska 68510-1514

ON-SITE WASTE WATER SYSTEM
CONSTRUCTION - INSTALLATION PERMIT
No. HS001742

System Type: Standard

Situs: No Site Address Specified

Issued: 2/22/2019

Expires: 2/22/2020

Description: S28, T11, R5, 6th Principal Meridian, LOT 33 SW

Owner: UNITED YEZIDI COMMUNITY OF AMERICA INC
305 W BELMONT AVE
LINCOLN, NE 68521

Shavonna M. Lausterer, MPH, CPH, Health Director

Dear Applicant:

The above document is your permit to construct a new On-site Waste Water System at the location listed. Please contact this office once the sytem is complete in order to schedule a final inspection before use.

Shavonna M. Lausterer, MPH, CPH
Health Director

RAYMOND CONTRACTING INC
13800 NW 70TH ST
RAYMOND, NE 68428

Lincoln-Lancaster County Health Department
Environmental Public Health Division (402) 441-8027
3131 O Street Lincoln, Nebraska 68510-1514

ON-SITE WASTE WATER SYSTEM
CONSTRUCT/ INSTALL EXTENSION PERMIT
No. HS001742

System Type: Standard

Situs: No Site Address Specified

Issued: 2/23/2020

Expires: 8/22/2020

Description: S28, T11, R5, 6th Principal Meridian, LOT 33 SW

Owner: UNITED YEZIDI COMMUNITY OF AMERICA INC
305 W BELMONT AVE
LINCOLN, NE 68521

Patricia D. Lopez

Patricia D. Lopez, RN, MSN, Interim Health Director

Dear Applicant:

The above document is your permit to construct a new On-site Waste Water System at the location listed. Please contact this office once the sytem is complete in order to schedule a final inspection before use.

Patricia D. Lopez

Patricia D. Lopez, RN, MSN
Interim Health Director

RAYMOND CONTRACTING INC
13800 NW 70TH ST
RAYMOND, NE 68428

Lincoln-Lancaster County Health Department
Environmental Public Health Division
3140 N Street • Lincoln NE 68510-1514
Phone: 402-441-8643

SCANNED

A

Permit Number HS001742

New Construction
Restrooms for Cemetery

Onsite Wastewater Treatment System
Request for Site Clearance and Permit

Include Form B and C.
Submit correct fee
with this Application

3 acres or more required for: ☑ Septic System ☐ Lagoon ☐ Other (Refer to Form C)

The undersigned hereby requests site clearance and permit to construct a Wastewater Treatment System in conformance with appropriate regulations.

PLEASE PRINT OR TYPE

A. Onsite System Location

Address 7610 NW 112th St (no rural route) City Malcolm, NE Zip 68402

Legal Description SW (1/4) 28 (Section) 11N (Township) 5E (Range) _____ (Subdivison) _____ (Addition) _____ (Block) 33 (Lot)

PID 05-28-300-022-000

B. Owner

Name United Yezidi Community of America Inc. Signature Salih Bashki

Address 305 W Belmont Ave City/State/Zip Lincoln, NE 68521

Home Phone 402-310-3703 (Khalaf Yeszitty - Translater) Work Phone _____

C. Certified Installer

Name: Lloyd Jakoubek, Raymond Contracting Inc Signature _____

Address 13800 NW 70th St City/State/Zip Raymond, NE 68428

Work Phone 402-890-6009 or 402-783-2663

D. Engineer

☐ Check and complete if engineer designed system P.E. License Number: _____

Designer Name _____ Firm _____ Work Phone _____

E. This system will serve a

☐ Residential Dwelling Number of Bedrooms _____ Whirlpool Bathtub? ☐ Yes ☐ No Total Acres 20.01

Garbage Grinder? ☐ Yes ☐ No

☑ Commercial Establishment/Other Facility Specify Restroom facility for Cemetery Design flow in gallons per day 240

Type of Wastewater ☑ Domestic ☐ Non-Domestic (maximum 60 people, 4 gpd per person)

DO NOT WRITE BELOW THIS LINE

Approval Process ☐ Municipal Code 24.38 ☒ County Resolution No. 02-30

1. Health Department
Site visits _____
Comments _____
Date rec'd 2/22/19
Date frwd 2/22/19
ACTION ☒ Approved ☐ Disapproved
Signature _____

2. Supt. Bldg. Insp. or Village Clerk
Comments _____
Date rec'd _____
Date frwd _____
ACTION ☒ Approved ☐ Disapproved
Signature _____

3. City or County Engineer
Comments _____
Date rec'd 10-8-2018
Date frwd 10-8-2018
ACTION ☑ Approved ☐ Disapproved
Signature _____

Installation Final Written Approval
By _____
Date 6/19/20

Contacted 11/6/20 -DH

2/21 Extension Contacted on 4/1/20

Business Office Use Only
Date Received 9-26-18 Amount Paid $405
Received By _____ Cash/Check No. 9462

extension pd 12-21-20 ck#9814 $330 JAO

White - Health Department Yellow - Engineer Pink - Building & Safety

Form A Updated: 1/13

Nate C. Hartman

From: Mike J. Petersen
Sent: Wednesday, January 23, 2019 11:15 AM
To: Nate C. Hartman
Subject: RE: 7610 NW 112th

Sorry, I forgot. 7610 NW 112th Street (Lot 33 SW 28-11-5) is a legal buildable lot not in the flood plain. -Mp

From: Nate C. Hartman
Sent: Wednesday, January 23, 2019 10:57 AM
To: Mike J. Petersen <mjpetersen@lincoln.ne.gov>
Cc: Todd A. Stutzman <tstutzman@lincoln.ne.gov>
Subject: 7610 NW 112th

Mike:

A follow-up to our discussion regarding the property last week, I never saw an email back from you regarding comments/approvals etc. I thought I saw one and I am hoping that I didn't accidently delete it...?

Thanks!

Nate Hartman REHS, QCIS, QPSWPPP
Senior Environmental Health Specialist
3131 'O' Street, Lincoln, NE 68510
O: 402-441-8643 F: 402-441-3890