Lincoln-Lancaster County Health Department
Environmental Public Health Division
3140 N Street • Lincoln NE 68510-1514
Phone: 402-441-8643

A

Permit Number HS001949

New Construction

Onsite Wastewater Treatment System
Request for Site Clearance and Permit

Include Form B and C.
Submit correct fee
with this Application

3 acres or more required for: ☑ Septic System ☐ Lagoon ☐ Other (Refer to Form C)

The undersigned hereby requests site clearance and permit to construct a Wastewater Treatment System in conformance with appropriate regulations.

PLEASE PRINT OR TYPE

A. Onsite System Location

Address 9600 S 1st St (no rural route) City Lincoln, NE Zip 68512

Legal Description SW 26 9N 6E 48

1/4 | 1/4 | Section | Township | Range | Subdivison | Addition | Block | Lot

PID 09-26-300-008-000

B. Owner

Name Jose Olivas Signature Jose Olivas

Address 7801 Renatta St Unit 2 City/State/Zip Lincoln, NE 68516

Home Phone 402-310-6127 Work Phone

C. Certified Installer

Name: Lloyd Jakoubek, Raymond Contracting Inc Signature

Address 13800 NW 70th St City/State/Zip Raymond, NE 68428

Work Phone 402-890-6009 or 402-783-2663

D. Engineer

☐ Check and complete if engineer designed system P.E. License Number:

Designer Name Firm Work Phone

E. This system will serve a

☑ Residential Dwelling Number of Bedrooms 6 Whirlpool Bathtub? ☐ Yes ☒ No Total Acres 19.59

Garbage Grinder? ☒ Yes ☐ No

☐ Commercial Establishment/Other Facility Specify Design flow in gallons per day

Type of Wastewater ☐ Domestic ☐ Non-Domestic

DO NOT WRITE BELOW THIS LINE

Approval Process ☐ Municipal Code 24.38 ☐ County Resolution No. 02-30

1. Health Department
Site visits
Comments
Date rec'd
Date frwd
ACTION ☐ Approved ☐ Disapproved
Signature

2. Supt. Bldg. Insp. or Village Clerk
Comments
Date rec'd
Date frwd
ACTION ☐ Approved ☐ Disapproved
Signature

3. City or County Engineer
Comments
Date rec'd
Date frwd
ACTION ☐ Approved ☐ Disapproved
Signature

Installation Final Written Approval
By
Date

Business Office Use Only
Date Received 12-3-14 Amount Paid $430.00
Received By JW Cash/Check No CC0287

White - Health Department Yellow - Engineer Pink - Building & Safety

Form A Updated: 1/13

Lincoln-Lancaster County Health Department (LLCHD)
Environmental Public Health Division
3140 "N" Street • Lincoln, NE 68510-1514
Phone: 402-441-8022

B

Permit Number:

Onsite Wastewater Treatment System

Soil Evaluation Report

PLEASE PRINT OR TYPE

Onsite System Location

Address 9600 S 1st St (no rural route) City Lincoln NE, Zip 68512

Owner Jose Olivas Address 7201 Renatta Dr. Lincoln, NE 68516

Date of Tests 6/12/18 to 6/13/18 Weather: Precipitation 0 Temperature 82 °

Percolation Test Data Table

A.	B.	C. D: E. F. Saturation/Swelling Time				G. H. I. J. K. Last 30 mins of 4 hr or last 10 mins of 1 hr Water Level Drop					L. M. N. Results		
		Start		End		Start		Initial	End				
Hole No.	Hole Depth (in)	Date (Mo/Da)	Time (Hr/Min)	Date (Mo/Da)	Time (Hr/Min)	Date (Mo/Da)	Time (Hr/Min)	Water Lev (in.)	Date (Mo/Da)	Time (Hr/Min)	Elapsed Time Interval	Water Level Drop (in)	Percolation Rates (Min/in = mpi)
1	24	6/12	2:30p	6/12	3:00p	6/13	4:30p	6	6/13	5:00p	30	13/16	37
2	22	"	"	"	"	"	"	6	"	"	"	9/16	53
3	20	"	"	"	"	"	"	6	"	"	"	3/4	40
4	22	"	"	"	"	"	"	6	"	"	"	1/2	60
								6					
								6					
								6					
								6					

Person Conducting Percolation Test

Name: Terri L Jakoubek, Raymond Contracting, Inc.

Phone: 402-783-2663 or 402-890-6009

Address 13800 NW 70th St

Raymond, NE 68428 Cert #1198

Sum of Percolation Rates: 190

Average of Rates: 48

Rate Used for Calculation: 60 (20 mpi variance)

Soil type (NRCS Maps/Other) Aksarben/Yutan SCL

Groundwater Depth >8'

DO NOT WRITE BELOW THIS LINE

Reviewing Action

Comments (Soil type, groundwater, floodplain, etc.) _____

Signature of Reviewing Official _____ Date _____

Lincoln-Lancaster County Health Department
Environmental Public Health Division
3140 "N" Street • Lincoln, NE 68510-1514
Phone: 402-441-8022


C

Permit Number:

Onsite Wastewater Treatment System

Preliminary Plan Specifications

Draw a plot plan showing onsite system sewer lines, drop of distribution boxes, tank, drainfields, percolation test holes, well, residence, direction of groundwater flow, property lines, and reserve area for replacement onsite system.

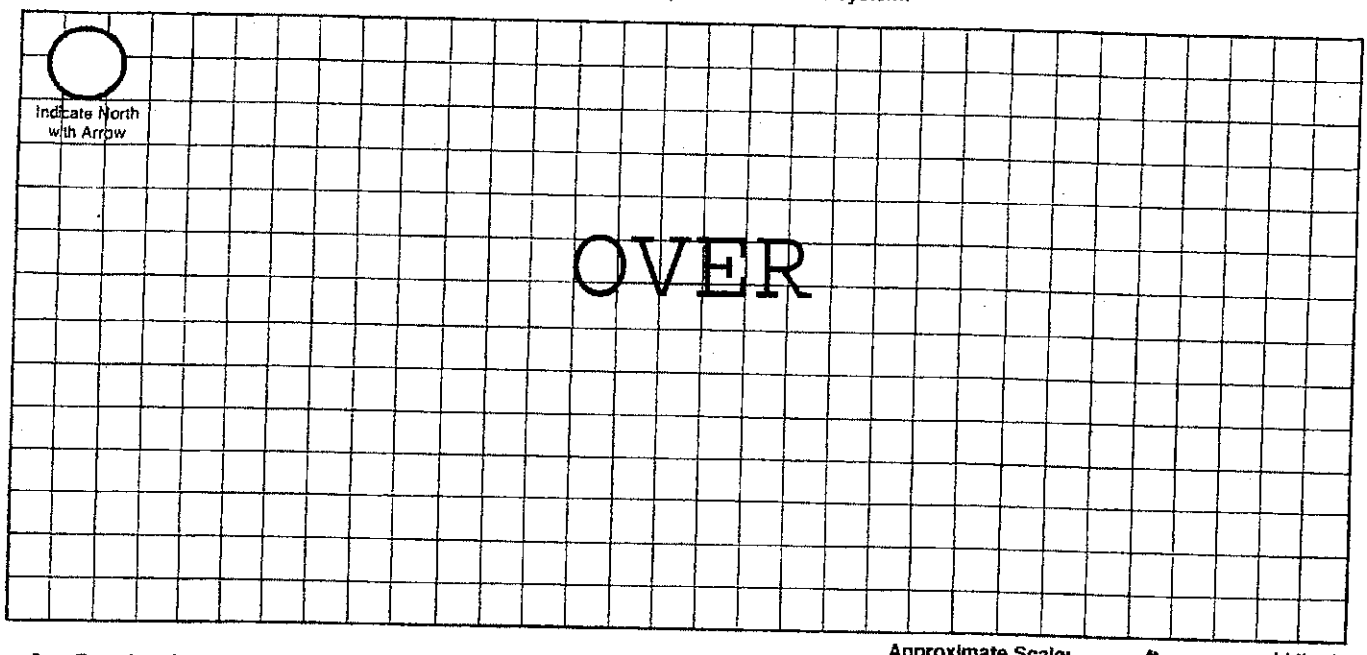

Approximate Scale: _____ft. = _____ grid line/s

A. Onsite System Location

Address (no rural route) 9600 S 1st St City Lincoln NE, Zip 68512

B. Proposed Septic Tank/s

Septic Tank Cap. 2000 gals Tank Material: ☒ Concrete ☐ Plastic ☐ Other_____ ☐ Lagoon(Max. seepage 1/8" per day)

C. Reserve Area for Replacement Onsite System

☐ Drainfield Absorption Area (percolation test required) ☒ Lagoon

D. Drainfield Absorption System

Percolation Rate 60 (min/inch = mpi) No. of Bedrooms 6 Soil Type Silty Clay Loam Land Slope_____%

☒ Trench ☐ Bed ☐ Non-Standard (engineer designed and NDEQ approved Total Square feet of drainfield 2,115 sq.ft.

Total length of laterals 470' Type of distribution: ☐ Perforated pipe ☐ Half-Round ☐ Chamber ☒ Other EZFlow 1203H

No. of absorption trenches 4 Width 40" No. of drop boxes 1 Distrubtion Box_____

No. of absorption beds_____ Width_____ No of Distribution lines per bed_____

E. Setbacks Check the Boxes Below if the Required Setback has been Satisfied

Distance From	Private Well	Public Well	Surface Water	Gound Water	Pressure Water Lines	Property Lines	Foundations Yours	Foundations Neighbors	All Other Setbacks
Tank (ft)	50 ☒	500 ☒	50 ☒	NA ☒	25 ☒	20 ☒	15 ☒	25 ☒	☒
Field (ft)	100 ☒	500 ☒	50 ☒	4 ☒	30 ☒	20 ☒	30 ☒	40 ☒	☒
Lagoon (ft)	100 ☐	500 ☐	50 ☐	N/A ☐	30 ☐	50 ☐	100 ☐	200 ☐	☐

F. Required Signatures


Home Building Contractor _____ Date 12/1/2018

Installer _____ Date 12/27/19

Jose Olivas 402-310-6127 9600 S 1st St, Lincoln, NE 68512

GIS Viewer
CITY OF LINCOLN - LANCASTER COUNTY, NE

City of Lincoln\Lancaster County GIS Map

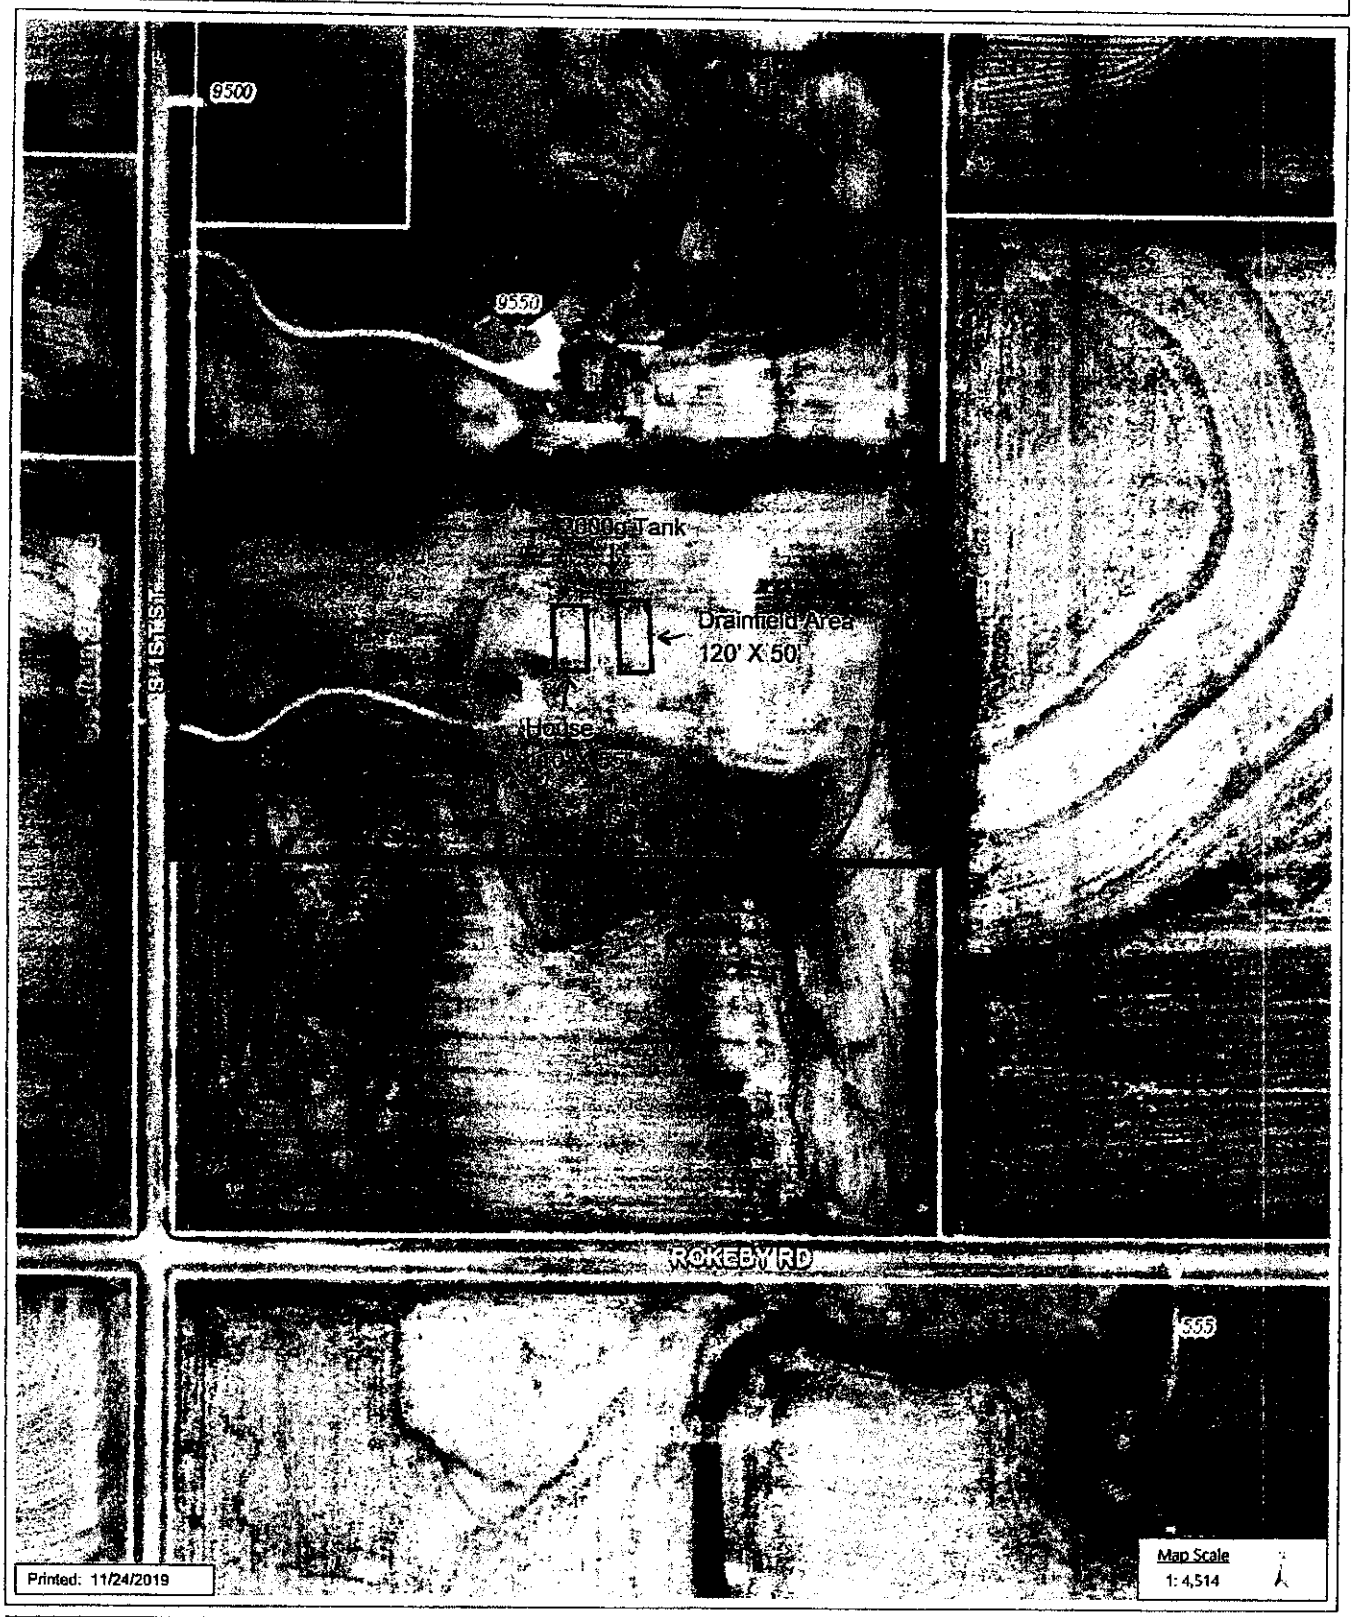

DISCLAIMER: The information is presented on a best-efforts basis, and should not be relied upon for making financial, survey, legal or other commitments. If you have questions or comments regarding the data displayed on this map, please email assessor@lancaster.ne.gov and you will be directed to the appropriate department.

Builder Initials JA

Lincoln-Lancaster County Health Department
Environmental Public Health Division (402) 441-8027
3131 O Street Lincoln, Nebraska 68510-1514

ON-SITE WASTE WATER SYSTEM
CONSTRUCTION - INSTALLATION PERMIT
No. HS001949

System Type: Standard

Situs: No Site Address Specified

Issued: 1/6/2020

Expires: 1/6/2021

Description: S26, T9, R6, Acres 6th Principal Meridian, LOT 48 SW

Owner: OLIVAS, JOSE G & YAJAIRA
7801 RENATTA ST UNIT 2
LINCOLN, NE 68516

Patricia D. Lopez

Patricia D. Lopez, RN, MSN, Interim Health Director

Dear Applicant:

The above document is your permit to construct a new On-site Waste Water System at the location listed. Please contact this office once the sytem is complete in order to schedule a final inspection before use.

Patricia D. Lopez

Patricia D. Lopez, RN, MSN
Interim Health Director

RAYMOND CONTRACTING INC.
13800 NW 70TH ST
RAYMOND, NE 68428