Lincoln-Lancaster County Health Department
Environmental Public Health Division
3140 N Street • Lincoln NE 68510-1514
Phone: 402-441-8643

A

Permit Number HS0012277

Onsite Wastewater Treatment System Permit Application

Include Form B and C. Submit correct fee with this Application

☒ Septic System ☐ Lagoon ☐ Other (Refer to Form C)

PLEASE PRINT OR TYPE

A. Onsite System Location

Address* 18485 No. 1ST STREET (no rural route) City DAVEY NE, NE Zip 68336

Legal Description 22 12N 6E Flying J #2
1/4 1/4 Section Township Range Subdivison Addition Block Lot

PID 13-22-401-002-000 *Approx. Address (If to be determined)

B. Owner

Name James Kehr Signature

Address 18635 No. 1ST STREET City/State/Zip DAVEY NE 68336

Home Phone 402 785-3955 Work Phone 402-434-1332

C. Certified Installer

Name: AWS Well Company, Inc Signature

Address PO Box 246 City/State/Zip Mead, NE 68041

Work Phone 402-624-3895

D. Engineer ☐ **Check and complete if engineer designed system** P.E. License Number:

Designer Name Firm Work Phone

E. This system will serve a

☒ Residential Dwelling Number of Bedrooms 3 Whirlpool Bathtub? ☐ Yes ☒ No Total Acres 31.0
Garbage Grinder? ☐ Yes ☒ No

☐ Commercial Establishment/Other Facility Specify Design flow in gallons per day

Type of Wastewater ☐ Domestic ☐ Non-Domestic

DO NOT WRITE BELOW THIS LINE

Approval Process

1. Health Department
Site visits
Comments
Date rec'd
Date frwd
ACTION ☐ Approved ☐ Disapproved
Signature

2. Supt. Bldg. Insp. or Village Clerk
Comments
Date rec'd
Date frwd
ACTION ☐ Approved ☐ Disapproved
Signature

3. City or County Engineer
Comments
Date rec'd
Date frwd
ACTION ☐ Approved ☐ Disapproved
Signature

Installation Final Written Approval
By
Date

Business Office Use Only
Date Received 8-10-21 Amount Paid $440.00
Received By JH Cash/Check No. Cash

White - Health Department Yellow - Engineer Pink - Building & Safety

Nebraska DEQ

Onsite Wastewater Treatment System
Soil Percolation Test Data Sheet

Owner Name James Kehr Phone 402-430-4543

Mail Address 18635 N 1st Str. Davey (City) NE (State) 68336 (Zip)

Location (Attach a sketch of the property showing test hole locations)

NE SE (¼ ¼) 22 (Section) 12 (Township) 6E (Range) Lancaster (County)

Lot # _____ Subdivision _____

Soil Type (Check one)

Sand ___ Silt ___ Clay ___ Sandy Clay ___ Loamy Sand ___ Silty Clay ___

Silty Clay Loam X Sandy Loam ___ Silt Loam ___

Dates of Test

Start Date 7/6 to End Date 7/7, 2021

Weather Conditions

Precipitation 0 Avg. Temp 80 °F

Percolation Test Measurements and Data

Hole No.	Hole Depth (in.)	Pre-saturation Period: Start Date (Mo./Day)	Pre-saturation Period: Start Time (Hr./Min)	Pre-saturation Period: End Date (Mo./Day)	Pre-saturation Period: End Time (Hr./Min)	Percolation Readings (last period): Start Date (Mo./Day)	Start Time (Hr./Min)	Start Water Level (inch)	End Time (Hr./Min)	End Water Level Drop (inch)	Results: Elapsed Time (minutes)	Drop in Water Level (inches)	Percolation Rate (m ÷ l) (Minutes per inch)
1	30"	7/6	8:00	7/7	8:00	7/7	8:00	28"	8:30	27.00	30	1	30.0
2	30	7/6	8:00	7/7	8:00	7/7	8:00	28"	8:30	26.50	30	1.5	20.0
3	30	7/6	8:00	7/7	8:00	7/7	8:00	28"	8:30	26.75	30	1.25	24.0
4	30	7/6	8:00	7/7	8:00	7/7	8:00	28"	8:30	26.50	30	1.5	20.0

Tests must be performed by a certified professional, a professional engineer or a registered environmental health specialist.

Signature Steve Wary AWS Well Co.

Certificate or License # C-1981

Address AWS WELL CO., INC.

City 1597 Co. Rd. 10 Box 246 Zip

Phone MEAD, NE 68041

402-624-3895

Sum of Percolation Rates = 94

Avg. of Percolation Rates* = (sum of rates ÷ number of tests) (minutes per inch) 23.5

* If rates vary by more than 20 min/in., do not average. Use slowest rate measured for sizing soil absorption area.

Nebraska DEQ

Onsite Wastewater Treatment System
Soil Percolation Test Data Sheet

Owner Name James Kehr Phone 402-430-4543

Mail Address 18635 N 1st Str. Davey (City) NE (State) 68336 (Zip)

Location (Attach a sketch of the property showing test hole locations)

NE SE (¼ ¼) 22 (Section) 12 (Township) 6E (Range) Lancaster (County)

Lot # _____ Subdivision _____

Soil Type (Check one)

Sand ___ Silt ___ Clay ___ Sandy Clay ___ Loamy Sand ___ Silty Clay ___

Silty Clay Loam X Sandy Loam ___ Silt Loam ___

Dates of Test

Start Date 7/6 to End Date 7/7, 2021

Weather Conditions

Precipitation 0 Avg. Temp 80 °F

Percolation Test Measurements and Data

Hole No.	Hole Depth (in.)	Pre-saturation Period: Start Date (Mo./Day)	Pre-saturation Period: Start Time (Hr./Min)	Pre-saturation Period: End Date (Mo./Day)	Pre-saturation Period: End Time (Hr./Min)	Percolation Readings (last period): Start Date (Mo./Day)	Start Time (Hr./Min)	Start Water Level (inch)	End Time (Hr./Min)	End Water Level Drop (inch)	Results: Elapsed Time (minutes)	Drop in Water Level (inches)	Percolation Rate (m ÷ l) (Minutes per inch)
1	30"	7/6	8:00	7/7	8:00	7/7	8:00	28"	8:30	27.00	30	1	30.0
2	30	7/6	8:00	7/7	8:00	7/7	8:00	28"	8:30	26.50	30	1.5	20.0
3	30	7/6	8:00	7/7	8:00	7/7	8:00	28"	8:30	26.75	30	1.25	24.0
4	30	7/6	8:00	7/7	8:00	7/7	8:00	28"	8:30	26.50	30	1.5	20.0

Tests must be performed by a certified professional, a professional engineer or a registered environmental health specialist.

Signature Shane Wavra AWS Well Co.

Certificate or License # C-1981

Address AWS WELL CO., INC.

City 1597 Co. Rd. 10 Box 246 Zip

Phone MEAD, NE 68041

402-624-3895

Sum of Percolation Rates = 94

Avg. of Percolation Rates* = (sum of rates ÷ number of tests) (minutes per inch) 23.5

* If rates vary by more than 20 min/in., do not average. Use slowest rate measured for sizing soil absorption area.

AWS WELL CO. INC
PO BOX 246
Mead, NE 68041 US
402-624-3895

Invoice 10843

BILL TO
Jake Kehr
18635 N 1st Street
Davey, NE 68336

DATE
07/09/2021

PLEASE PAY
$850.00

DATE	DESCRIPTION	QTY	RATE	AMOUNT
	Soil Percolation Test DATA SHEET ENCLOSED, THERE ARE TWO COPIES, ONE FOR YOUR RECORDS AND THE OTHER TO ACCOMPANY THE LANCASTER COUNTY PERMIT APPLICATION THAT IS ENCLOSED. YOU WILL NEED TO COMPLETE, SIGN AND SUBMIT WITH PAYMENT.	1	850.00	850.00

Thank you for your business, please remit payment to PO BOX 246, Mead, NE 68041. We do not accept debit/credit cards at this time. Sorry for the inconvenience.

TOTAL DUE $850.00

THANK YOU.

Lincoln-Lancaster County Health Department
Environmental Public Health Division (402) 441-8027
3131 O Street Lincoln, Nebraska 68510-1514

ON-SITE WASTE WATER SYSTEM
CONSTRUCTION - INSTALLATION PERMIT
No. HS002277

System Type: Standard

Situs: No Site Address Specified

Issued: 8/20/2021

Expires: 8/20/2022

Description: FLYING J ADDITION, Lot 2

Owner: KEHR, JAMES A & MELODY
18401 N 1 ST
DAVEY, NE 68336

Patricia D. Lopez

Patricia D. Lopez, RN, MSN, Health Director

Dear Applicant:

The above document is your permit to construct a new On-site Waste Water System at the location listed. Please contact this office once the sytem is complete in order to schedule a final inspection before use.

Patricia D. Lopez

Patricia D. Lopez, RN, MSN
Health Director

JAMES KEHR
18635 N 1ST ST
DAVEY, NE 68336

Lincoln-Lancaster County Health Department
Environmental Public Health Division
3140 N Street • Lincoln NE 68510-1514
Phone: 402-441-8643

A

Permit Number HSO2277

Onsite Wastewater Treatment System Permit Application

Include Form B and C. Submit correct fee with this Application

☒ Septic System ☐ Lagoon ☐ Other (Refer to Form C)

PLEASE PRINT OR TYPE

A. Onsite System Location

Address* 18485 No. 1st STREET City DAVEY NE Zip 68336
(no rural route)

Legal Description 22 12N 6E Flying J #2
1/4 1/4 Section Township Range Subdivison Addition Block Lot

PID 13-22-401-002-000 *Approx. Address (If to be determined)

B. Owner

Name James Kehr Signature
Address 18635 No. 1st STREET City/State/Zip DAVEY NE 68336
Home Phone 402-785-3955 Work Phone 402-434-1332

C. Certified Installer

Name: AWS Well Company, Inc Signature
Address PO Box 246 City/State/Zip Mead, NE 68041
Work Phone 402-624-3895

D. Engineer

☐ Check and complete if engineer designed system P.E. License Number:
Designer Name Firm Work Phone

E. This system will serve a

☒ Residential Dwelling Number of Bedrooms 3 Whirlpool Bathtub? ☐ Yes ☒ No Total Acres 31.0
Garbage Grinder? ☐ Yes ☒ No

☐ Commercial Establishment/Other Facility Specify Design flow in gallons per day
Type of Wastewater ☐ Domestic ☐ Non-Domestic

30.98

DO NOT WRITE BELOW THIS LINE

Approval Process

1. Health Department
Site visits
Comments
Date rec'd 8/20/21
Date frwd 8/25/21
ACTION ☒ Approved ☐ Disapproved
Signature

2. Supt. Bldg. Insp. or Village Clerk
Comments
Date rec'd
Date frwd
ACTION ☐ Approved ☐ Disapproved
Signature

3. City or County Engineer
Comments
Date rec'd
Date frwd
ACTION ☐ Approved ☐ Disapproved
Signature

Installation Final Written Approval
By
Date 7/25/22

Business Office Use Only
Date Received 8-19-21 Amount Paid $440.00
Received By JH Cash/Check No. Cash

White - Health Department Yellow - Engineer Pink - Building & Safety

Form A Updated: 4/15

Nate C. Hartman

From: Danielle Nice <danielle@awswell.com>
Sent: Wednesday, July 20, 2022 8:16 AM
To: Nate C. Hartman
Subject: Jake Kehr
Attachments: KehrDrawing.pdf

Nate,


Attached is the as built drawings for Jake Kehr!

Thank You,
Danielle Shellito
AWS Well Company

MID-AMERICA
PUMP & SUPPLY

HWY 6 & TRUMBULL RD B • P.O. BOX 1287 • HASTINGS, NE 68902-1287
TOLL FREE (800) 444-5658 • PHONE (402) 463-5658 • FAX (402) 463-0323
WWW.MID-AMERICAPUMP.COM

Jake Keher
18485 N First St Davey
(40°59'36" N 96°43'23" W)

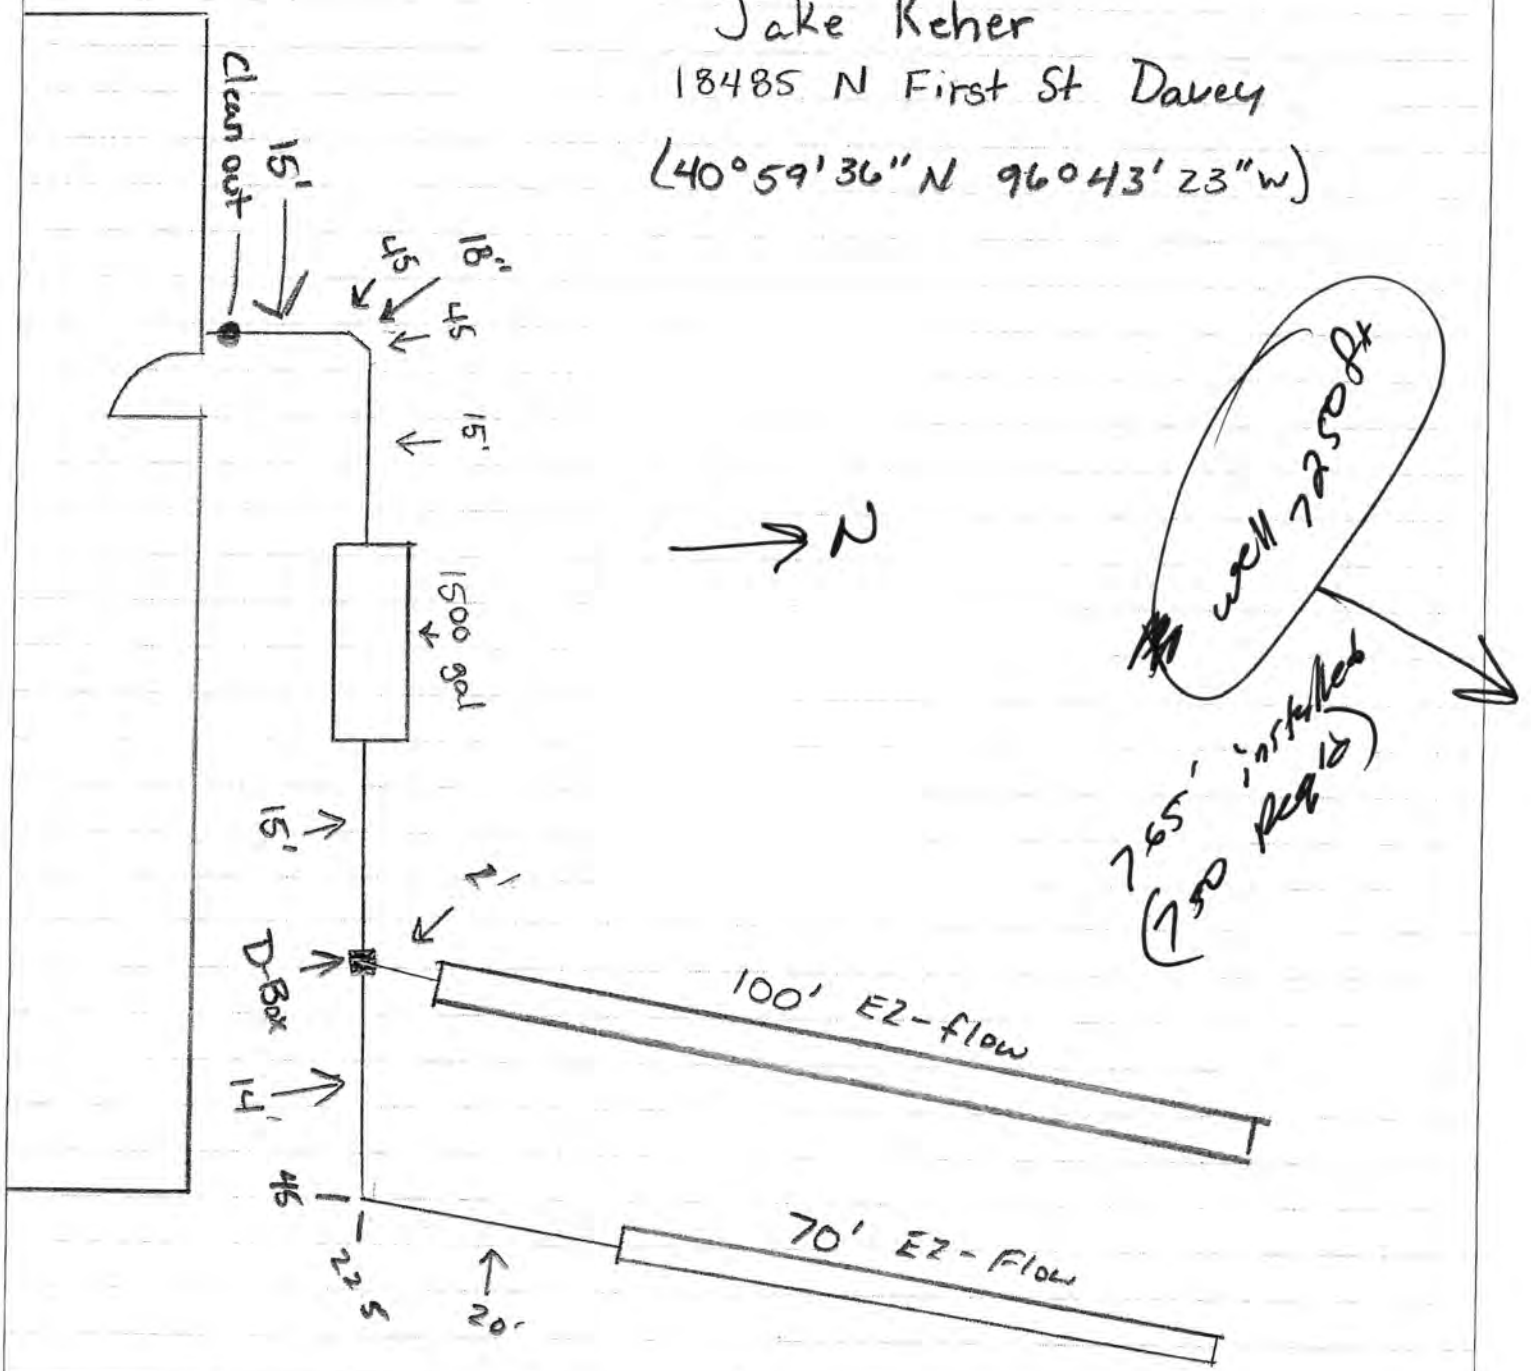

CELEBRATING 30 YEARS 1986 - 2016
A NEBRASKA COMPANY

CUSTOMER:	
DATE:	
ORDER NUMBER:	
JOB NAME:	
COMMENTS:	