LINCOLN-LANCASTER COUNTY HEALTH DEPARTMENT

FILE NO. 671-C

INDIVIDUAL SEWAGE SYSTEM CONSTRUCTION — TYPE OF PERMIT

February 19, 1976 — THIS PERMIT EXPIRES

Keith Hauschel — ISSUED TO

Martell, Nebraska — ADDRESS

T8N; R6E; Sec. 28; Bl. 1; Lot 3-7; Werger's Addition to Martell

LEGAL DESCRIPTION

REMARKS: AMER

PERMIT	INSPECTION FEE	OCCUPATION TAX	TOTAL
$ 15.00	$	$	$
ACCOUNTING NO.	ACCOUNTING NO.	ACCOUNTING NO.	CODE
	110.16	148.14	6-2

RECEIPTED BY — DATE — AMOUNT

VALID RECEIPT ONLY IF RECEIPTED IN THIS SPACE

ISSUING OFFICER

THIS PERMIT IS ISSUED AS PROVIDED BY COUNTY RESOLUTION NO. 2832

FORM HD-41(73) APPLICATION FOR PERMIT TO ALTER, EXTEND OR REPAIR INDIVIDUAL SEWAGE DISPOSAL SYSTEM

City Ordinance No. 9150 ☐
County Resolution No. 2832 ☒

LINCOLN-LANCASTER COUNTY HEALTH DEPARTMENT
Division of Environmental Health
2200 St. Marys Ave.
Lincoln, Nebraska 68502 (Phone: 475-6221)

FILE NO. 671-C

TO: Division of Environmental Health
Lincoln-Lancaster County Health Dept.

DATE: 8-9-75

The undersigned hereby applies for a permit to ALTER ☒, EXTEND ☐, or REPAIR ☐ an existing Individual Sewage Disposal System, in conformance with appropriate Ordinance or Resolution, as described in this application and drawings attached hereto.

1. Legal description of property: Twp. 8N ; Range 6E ; Section 28 ;
Block 1 ; Lot 3 thru 7 ; Addition WERGER'S ADDITION TO MARTELL
Street Address MARTELL, NEBRASKA

2. Property Use: Residential ☒; Commercial ☐
No. Bedrooms 2
Describe
Other Use ☐
Describe

3. Type of existing Individual Sewage Disposal System: Septic Tank ☒; Other ☐

4. Description of proposed alteration, extension or repair: Additional Septic Tank + drain lateral to be installed to omit Basement Drain, Draining across street to lot East of residence. Tank used only for auto. washer & Basement drain.

5. Work to be done by: Owner ☒ ; or Contractor ☐ , _____
Contractor's Name

6. Estimated cost of project:

a. Materials	$	500 00
b. Labor	$	130 00
c. Other	$	
TOTAL	$	630 00

Keith R. Hauschel
Signature of Applicant (owner or lessee)

Martell, Neb. 68404
Address

(Do not write below this line)


REVIEWING ACTION

1. Date Rec'd: _____
Filing Fee: $ 15.00


2. Site Visits:
Date: _____ by: _____
Date: _____ by: _____
Date: _____ by: _____

3. Date: Approved ☒; Disapproved ☐
by: Jerrold E. Hood

4. INSTALLATION FINAL WRITTEN APPROVAL
Date: 8/19/75 by: L. C. H.

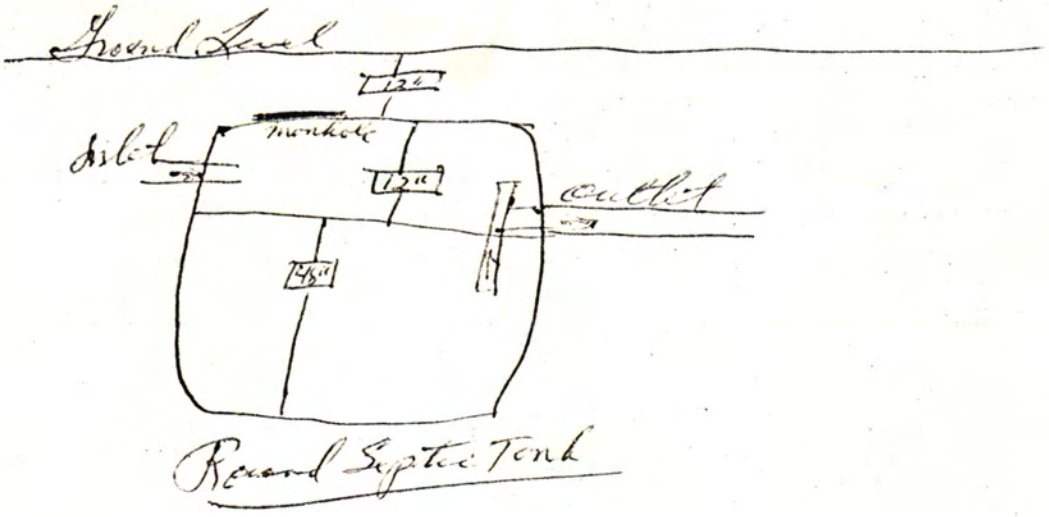

Round Septic Tank

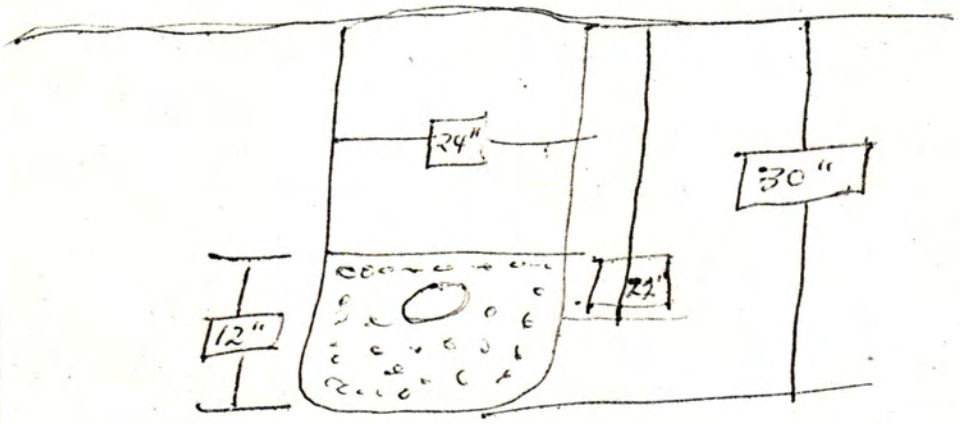

Trench + Lateral

FORM HD- 45(73) PLANS & SPECIFICATIONS
SEWAGE DISPOSAL SYSTEM

(Annex to Application)
City Ordinance No. 9150 ☐
County Resolution No. 2832 ☐

LINCOLN-LANCASTER COUNTY HEALTH DEPARTMENT
Division of Environmental Health
2200 St. Marys Avenue
Lincoln, Nebraska 68502 (Phone: 475-6221)

FILE NO. _____

SPECIFICATIONS

DATE: 8-11-75


A. BUILDING SEWER:
1. Material _____; Diameter ____ in.
2. Distance above basement floor ____in.; or below basement floor ____in.
3. Distance between dwelling and septic tank ____ft.
4. Number of clean-outs _____.
5. Distances To:
Well or Suction Line ____ft.;
Stream ____ft.; Pressure Line ____ft.;
Property Line ____ft.

B. SEPTIC TANK (Provide construction drawings.)
1. Material Fiberglas; No. of compartments 1.
2. Capacity 500 gals.; Liquid depth 48 in.
3. Factory Built: Yes ☒ (Company _____)
No ☐
4. Manholes: Over Inlet; diam. 16 in.
Over Outlet; diam. ___in.
Below Grade 12 in.
5. Inlet: Baffle ☒; or Tee ☐
6. Outlet: Baffle ☐; or Tee ☒
Depth of outlet below inlet 6 in.
7. Depth of top of tank below finished grade 12 in.
8. Distances To:
Well or Suction Line 35 ft.;
Stream None ft.; Pressure Line 50 ft.;
Property Line 30 ft.

C. DISTRICTION BOX
1. Material _____; No. available outlets _____.
2. Factory Built: Yes ☐, (Company _____)
No ☐
3. Dimension: Length ____in.; Width ___in.
Depth ____in.
4. Distance from Septic Tank ____ft.
5. Serial Distribution: Yes ☐, No ☐
(If yes, show detailed plans.)


D. ABSORPTION FIELD: (Provide drawings.)
1. Type: Perf. Plastic Pipe 4"
2. Lateral Lines: Depth below grade 18 in.
Number 1; Length of each line 30 ft
Total length of Laterals 30 ft.;
Slope 6 in/100 ft. Diameter of pipe 4 in.; Shape Round
Material: concrete ☐; fiber asbestos ☐; clay ☐; other plastic
Distance between lateral lines 25 ft.
3. Trench Dimensions: Depth 30 in.;
Width 24 in.
4. Filter Material: gravel.
Depth of material from trench bottom 12 in.
5. Distances To:
Well or Suction Line 50 ft.;
Stream none ft.; Pressure Line 50 ft.
Property Line 30 ft.
6. Percolation Rate: _____minutes/inch

TYPICAL SKETCHES

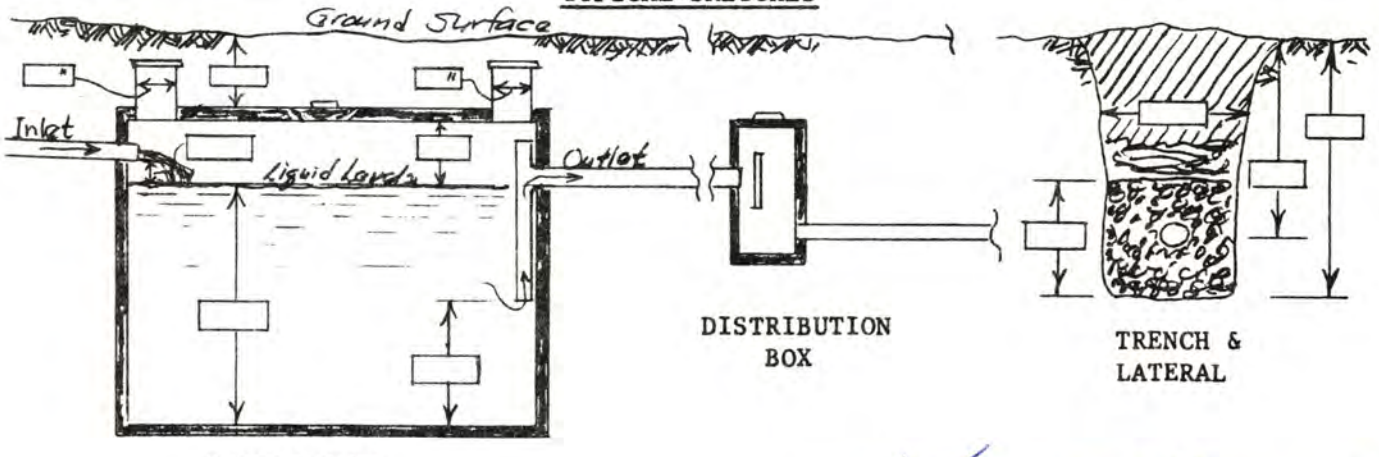


Keith R. Hauschel
Signature of Applicant

Over

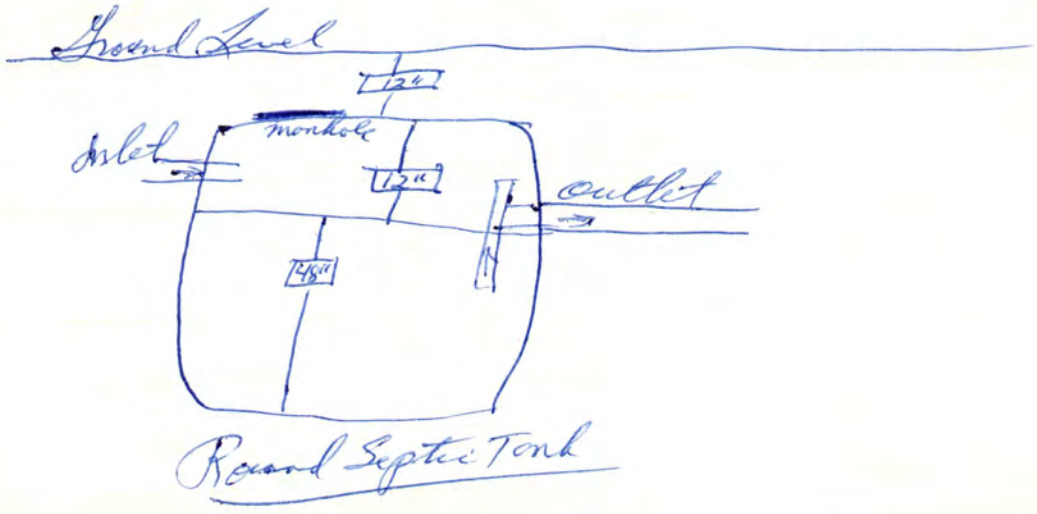

Round Septic Tank

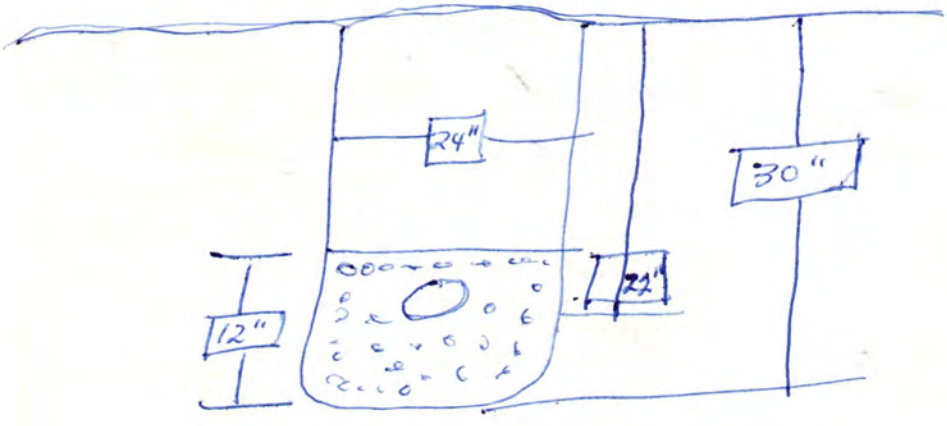

Trench + Lateral