LINCOLN-LANCASTER COUNTY HEALTH DEPARTMENT

ENVIRONMENTAL HEALTH DIVISION

3140 "N" STREET Lincoln, NE 68510-1514 (402) 441-8000

NON TRANSFERABLE

PERMIT

Permit
SEWAGE INSTALLATION
SEPTIC SYSTEM

No. 98380179501

PAID

Issued 07/01/98
Expires 01/01/99
Revenue Code 3157

FEES: $150.00

Establishment
LEROY DREESEN
T9N R5E SEC 2 QTR SW
RIDGE PARK BLK 4 LOT 1
2901 PHEASANT RIDGE RD

TOTAL $150.00

Permittee
LEROY DREESEN
104 BRIDGE RD
NORFOLK NE 68701-3504

Issued By Health Director
Lincoln-Lancaster County Health Department

007757

THIS LICENSE OR PERMIT IS ISSUED SUBJECT TO REVOCATION AS PROVIDED BY LAW "POST IN A PROMINENT PLACE"

Lincoln-Lancaster County Health Department
Environmental Health Division
3140 "N" Street • Lincoln, NE 68510-1514
Phone: 402-441-8022

A

Permit Number:

Sewage Disposal System

Request for Site Clearance and Permit

Include Form B, Form C and Applicable Fees with this Application.

☒ Septic System ☐ Lagoon ☐ Other (Refer to Form C)

The undersigned hereby requests site clearance and permit to construct a Sewage Disposal System in conformance with appropriate resolution or ordinance, as described herein:

PLEASE PRINT OR TYPE

A. System Location (Indicate correct number and street)

Address 2901 PHEASANT RIDGE RD HUB HALL ADDITION City LINCOLN NE, Zip 68502
(no rural route) 2

Legal Description SW 74 + PHEANT DR W, VAN DORN RIDGE PARK 4 1
1/4 1/4 Section 9N Township 5E Range Subdivision Addition Block Lot

Geographical Location (if known): Longitude _____ Latitude _____

☐ Check if system mail address is not the same as the owner's address

B. Owner

Name LEROY DREESEN Signature LeRoy Dreesen

Address 104 BRIDGE RD City/State/Zip NORFOLK NE 68701

☐ Check if owner designed system Home Phone (402) 371-2229 Work Phone CELL (Son) 402-432-1700

C. Contractor

Name _____ Company Name _____

Address _____ City/State/Zip _____

☐ Check if contractor designed system Work Phone _____

D. Engineer/Installer ☐ Check and complete if engineer designed system

Designer Name _____ Firm _____ Work Phone _____

E. This System Will Serve a

☒ Residential Dwelling Number of Bedrooms 3 Is there a Whirlpool Bathtub YES NO

☐ Commercial Establishment/Other Facility Specify _____

Design flow in gallons per day_____ Type of Wastewater: ☐ Domestic ☐ Non-Domestic.

DO NOT WRITE BELOW THIS LINE

Approval Process ☒ Municipal Code 24.38 ☐ County Resolution No. 2832

1. **Health Department** Date rec'd 7/1/98 Date frwd 7/1/98 **ACTION** ☒ Approved ☐ Disapproved Signature Jerrold C. Hood
2. **Supt. Bldg. Insp. or Village Clerk** Date rec'd 7-1-98 Date frwd 7-1-98 **ACTION** ☒ Approved ☐ Disapproved Signature _____
3. **City or County Engineer** Date rec'd 7-1-98 Date frwd 7-1-98 **ACTION** ☒ Approved ☐ Disapproved Signature _____

9-24-98 mm need dozing (OK)

Installation Final Written Approval

By Ron Maynard

Date 10-1-98

Business Office Use Only

Date Rec'd 07/01/98
Amt Paid 150.00
Rec'd By LS Cash/Check No. 2158

FORM 23-100 10-96 White - Health Dept. Yellow - Engineer Pink - Bldg. Inspector Also well

Lincoln-Lancaster County Health Department
Environmental Health Division
[illegible]

B

Permit Number

Sewage Disposal System
Soil Absorption Test Data Report
Annex to Application

PLEASE PRINT OR TYPE

System Location (Indicate correct number and street)

Address

Owner

Soil Type (SCS)

Percolation Rate

Date(s) Tested

Weather: Precipitation

Temperature

Percolation Test Data Table

A	B	C	D	E	F	G	H	I	J	K	L	M	N
		Pre-Saturation Period				Percolation Readings					Results		
		Start		End		First			2nd				
Hole No.	Depth (inches)	Date (Mo/Day)	Time (Hr/Min)	Date (Mo/Day)	Time (Hr/Min)	Date (Mo/Day)	Time (Hr/Min)	Water Level	Date (Mo/Day)	Time (Hr/Min)	Elapsed Time (Min)	Water Level (inches)	Percolation Rate (Min/inch)
1													
2													
3													
4													
5													
6													

> 20 mpi, three, 60 mpi

mpi

Person Conducting Percolation Tests

Name

Phone

Address

DO NOT WRITE BELOW THIS LINE

Reviewing Action

Remarks: Sharpsburg soil

Signature of Reviewing Official: Ron Mayernik

Date: 7-1-98


FORM 23-161 10-96

Lincoln-Lancaster County Health Department
Environmental Health Division

C

Permit Number

Sewage Disposal System
Preliminary Plan Specifications

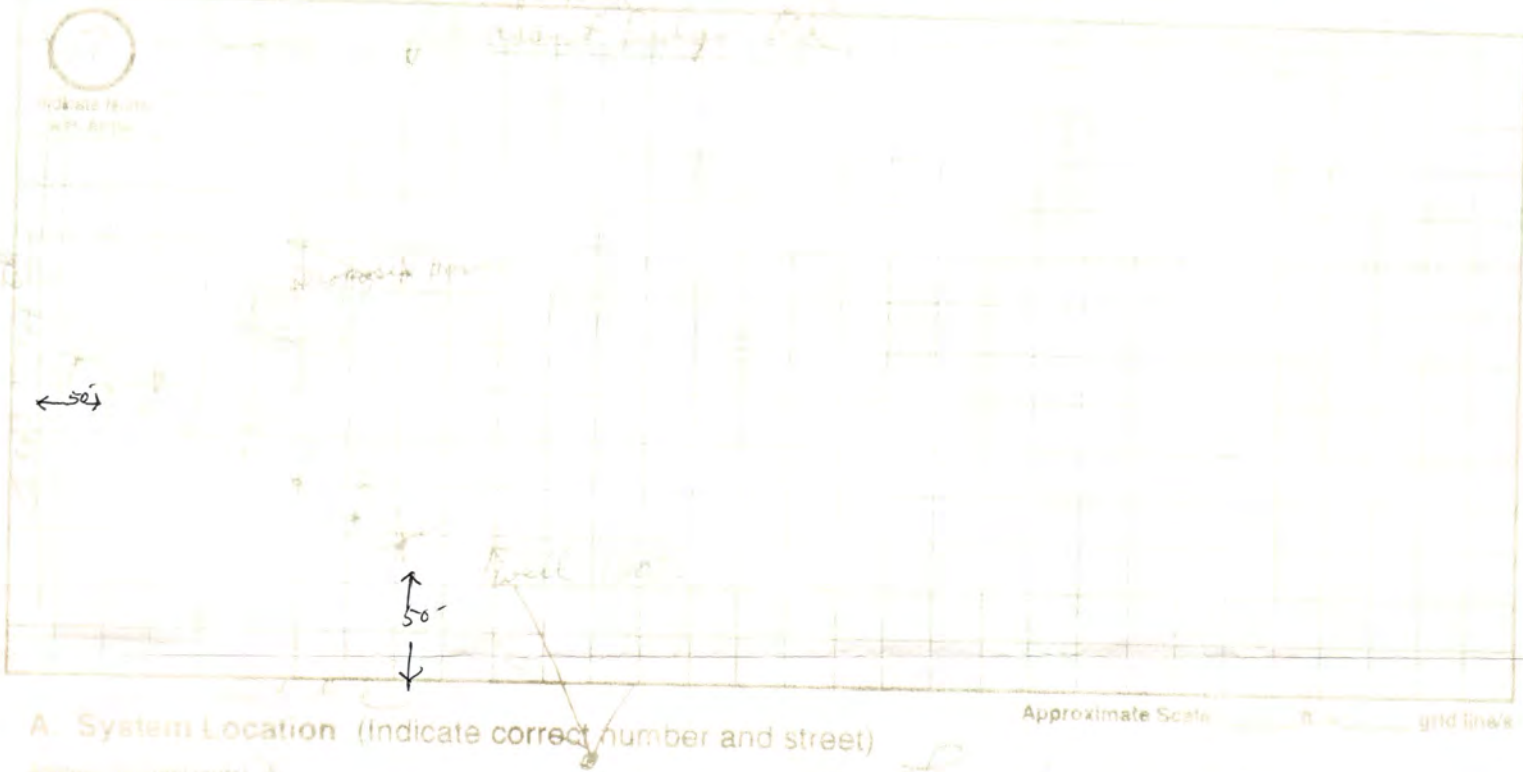

Approximate Scale ft. = grid line's

A. System Location (Indicate correct number and street)

Address (or rural route) City NE Zip

B. Proposed Septic Tank/s

Tank Material ☒ Concrete ☐ Plastic ☐ Other

C. Proposed Absorption System (See Form B for Percolation information)

Percolation Rate (min. per inch) Soil Type: Shoupsburg soil

Type of Absorption System ☒ Trench ☐ Bed ☐ Other

Total Square Feet of Field Required sq. ft.

Type of Lateral ☐ Half-Moon ☐ Perforated Pipe ☒ Other Lateral Material

Capacity of Septic Tank gals. Number of Absorption Beds Number of Distribution Cells

Total Length of Laterals ft. Number of Trenches Trench Width

D. Setbacks Check the Boxes Below if the Required Setback has been Satisfied


Distance From	Private Well	Public Well	Surface Water	Gound Water	Pressure Water Lines	Property Lines	Foundations Yours	Foundations Neighbors	All Other Structures
Tank (ft)	50 ☒	500 ☒	50 ☒	NA ☒	2 ☒	2 ☒	15 ☒	15 ☒	☒
Field (ft)	100 ☒	500 ☒	50 ☒	4 ☒	30 ☒	30 ☒	30 ☒	30 ☒	☒
Lagoon (ft)	100 ☒	500 ☒	50 ☒	NA ☒	30 ☒	30 ☒	100 ☒	100 ☒	☒

E. Required Signatures


Home Building Contractor LeRoy Diesen Date 7-1-98

Installer Date

FORM 23-102 10-96

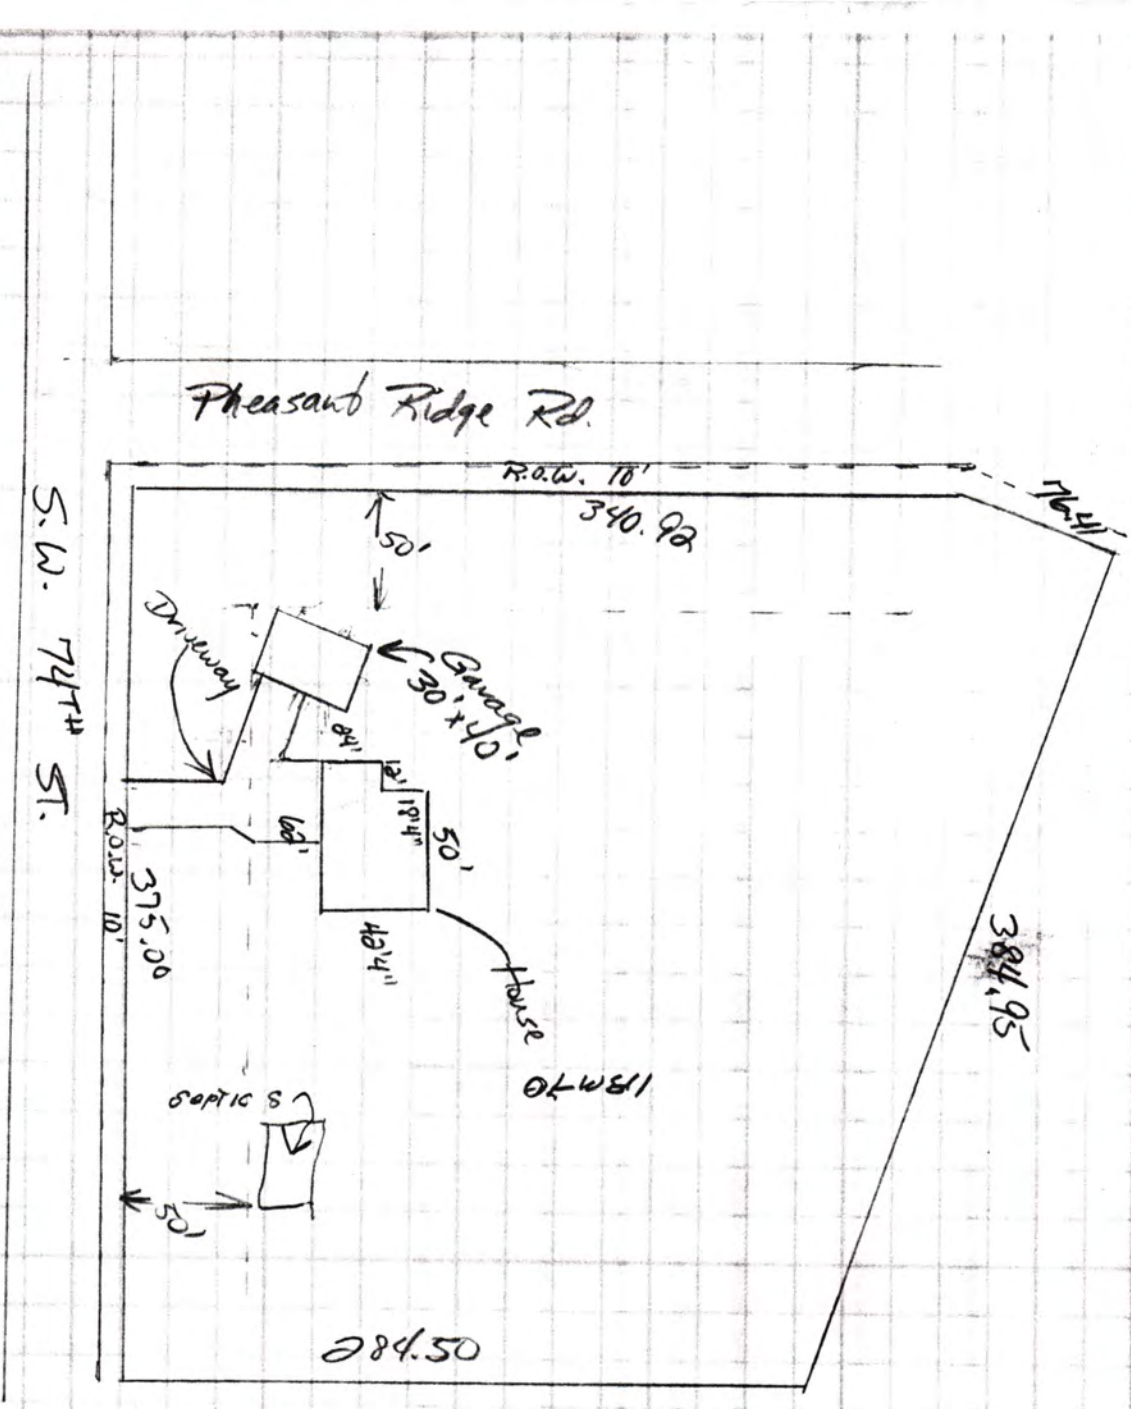
Pheasant Ridge Rd.
R.O.W. 10'
340.92
50'
Driveway
Garage
30'x40'
8'
12'
10'4"
50'
6'
R.O.W. 10'
375.00
46'4"
House
384.95
SEPTIC
50'
284.50
S.W. 74TH ST.

As Built Drawing by Lavey Schwarck

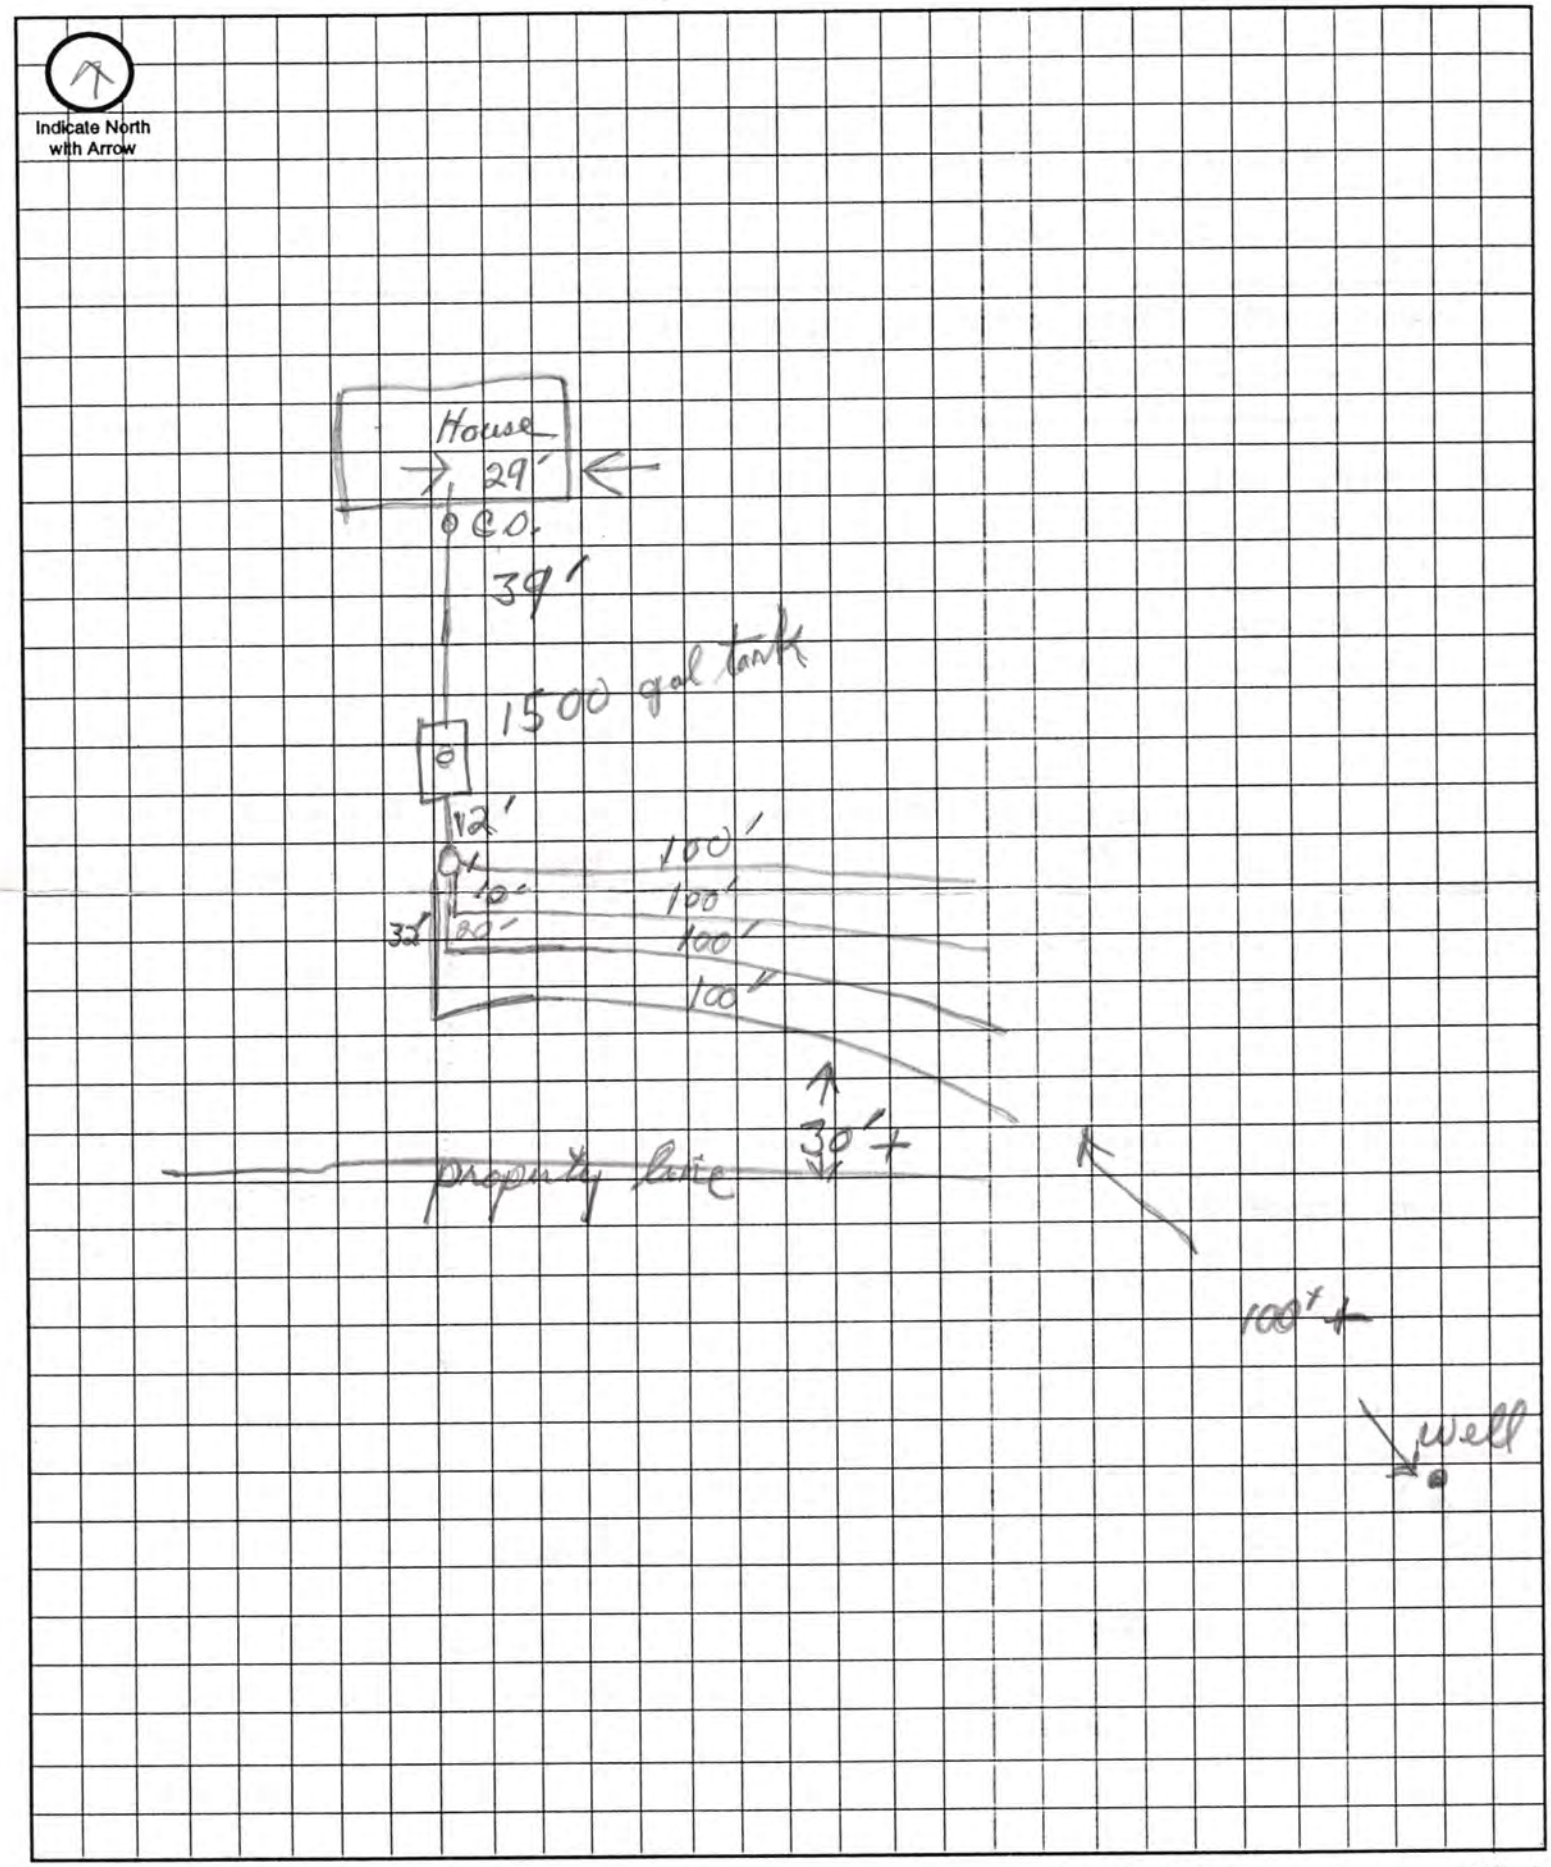

Approximate Scale: _____ ft. = _____ grid line/s

LINCOLN-LANCASTER COUNTY HEALTH DEPARTMENT

ENVIRONMENTAL HEALTH DIVISION

3140 "N" STREET Lincoln, NE 68510-1514 (402) 441-8000

NON TRANSFERABLE

PERMIT

Permit

WATER WELL
NEW WATER WELL CONSTRUCTION

PAID

No. 98400076101

Issued 07/01/98
Expires 01/01/99
Revenue Code 3162

FEES: $75.00

Establishment

LEROY DREESEN
T9N R5E SEC 2 QTR SW
RIDGE PARK BLK 4 LOT 1
2901 PHEASANT RIDGE RD

Permittee

LEROY DREESEN
104 BRIDGE RD
NORFOLK NE 68701-3504

TOTAL $75.00

Issued By Health Director
Lincoln-Lancaster County Health Department

007758

THIS LICENSE OR PERMIT IS ISSUED SUBJECT TO REVOCATION AS PROVIDED BY LAW "POST IN A PROMINENT PLACE"

Lincoln-Lancaster County Health Department
Environmental Health Division
3140 "N" Street ● Lincoln, NE 68510-1514
Phone: 402-441-8022

Permit No. 98400076 I

Request for Site Clearance and Permit for Individual Water Well

PID # 03-02-204-001-000

The undersigned hereby requests:

- ☒ Site Clearance and Permit to construct a new individual water well - $75.00
- ☐ Annual Permit for an existing well - $50.00
- ☐ Permit to repair or alter existing well involving opening of well - $25.00

2901 PHEASANT RIDGE RD.

1. Well Site Address SW 74 & Pheasant Dr City Lincoln, NE Zip 68502
(West Van Dorn) (No Rural Route Please)
Legal description of property:
Twp 9N; Range 5E; Section 2; Block 4; Lot 1; Addition RIDGE PARK

2. Well use: ☑ Residential; ☐ Commercial; ☐ Other; Describe: _____

3. Distance to Public Water Supply _____ feet.

Signature of Owner LeRoy Dreesen

Print Name LeRoy Dreesen
Current Address 104 Bridge Rd
Norfolk NE
Current Home Phone 402-371-2229
Work Phone Cell 432-1700

Signature of Contractor _____

Print Name MO SETT WELL DRILLING
Address P.O. Box 308 HICKMAN NE 68372
Home Phone 792-2515
Work Phone _____
Cellular Phone _____

Sewage Permit Applied for: ☒ Yes ☐ No ☐ Not applicable

Please Submit Permit Fee with This Request
Please Do Not Write Below This Line

Approval Process: Lincoln Municipal Code 8.44

1. Health Department — Date received 7/1/98; Date forwarded 7/1/98 — ACTION ☒ Approved ☐ Disapproved; Signature: Jerrold C. Hoot
2. Building & Safety — Date received 7/1/98; Date forwarded 7/1/98 — ACTION ☒ Approved ☐ Disapproved; Signature: [illegible]
3. City Engineer — Date received 7/1/98; Date forwarded ___/___/___ — ACTION ☑ Approved ☑ Disapproved; Signature: Dave Hubbs

REMARKS OR REASONS FOR DISAPPROVAL: _____

Site Visits:
Date: 9/9/99 By Jerrold C. Hoot
Date: ___/___/___ By _____
Date: ___/___/___ By _____

Installation Final Written Approval
By: Jerrold C. Hoot R.E.H.S.
Date: 9/13/99

Distribution:
White - Health Dept. Lt. Green - Engineer Lt. Blue - Bldg Inspector

Nitrate Level 0.7 mg/L
Chloride Level _____ mg/L
Bacteriological Analysis Satisfactory
Yes X No ____
Other _____

Business Office Use Only
Date Rec'd: 07/01/98
Amt Paid: $ 75.00
Rec'd By LL Cash/Check No. 2158

Also Sewage

APR 15 1999

FORM: 20223-0483
REQUEST FOR SITE CLEARANCE AND PERMIT
FOR INDIVIDUAL WATER WELL
CITY ORDINANCE NO. 13553
FILE NO. _____

Lincoln-Lancaster County
HEALTH DEPARTMENT
3140 "N" STREET LINCOLN, NE 68510-1514

DATA SHEET FOR WATER WELLS

Legal Description: Sec. 2 T. 9 R. 5E Block 4 Lot 1 Addition RIDGE PARK ADDITION

Owner LE ROY DREESEN Address 104 BRIDGE RD., NORFOLK, NE 68701

LOG OF WELL	
Depth ft. --to--	Description
0- 10	BRN CLAYS
10- 50	BRN/TAN CLAY
50- 70	BRN & BLUE CLAY
70-175	GRAY CLAY, SOME SILTY
175-215	RED, GRAY, & YEL SHALE
215-241	BLUE SHALE
241-246	FINE SS, LITTLE SHALE
246-262	FINE WHITE SS
262-265	YEL/WHITE SHALE

WELL COMPLETION RECORD

Drilling Method: ROTO/WATER

Depth (from ground level), Ft. 258'
Date Completed 10/14/98

Casing: Length, Ft. 243'; Dia. In. 4"
Wall Thickness, Inc. .214"; type PVC

Screen: Length, Ft. 15' Dia. In. 4"
Type PVC WOP, MONOFLEX, slot Size .020

Drop Pipe: Length, Ft. 140' Dia. In. 1 1/4"

Water Level, Surface to top of water, Ft.:
Static 103' M, Pumping 110' EST

Yield: 20 ggm, Measured ☒ , Est. ☐
Chlorination Completed Yes ☒ No ☐

The above information including "Log of Well" is a true record of the job performed by me.

Driller _____ (Signed)

Address P. O. BOX 308
Hickman, Nebraska 68372-0308

Date 13 APRIL 1999

REMARKS NITRATE NITROGEN 0.7 p.p.m.
BACTERIOLOGICAL O.K.

DO NOT WRITE BELOW THIS DOUBLE LINE

Health Department forwarded copy of record to Nebraska Conservation and Survey Department for Scientific Record ☐

FORM 33-4

APR 15 1999

FORM: 20223-0483
REQUEST FOR SITE CLEARANCE AND PERMIT
FOR INDIVIDUAL WATER WELL
CITY ORDINANCE NO. 13558
FILE NO. 9900076 /

Lincoln-Lancaster County
HEALTH DEPARTMENT
3140 "N" STREET LINCOLN, NE 68510-1514

DATA SHEET FOR WATER WELLS

Legal Description: Sec. 2 T. 9 R. 5E Block 4 Lot 1 Addition RIDGE PARK ADDITION

Owner LE ROY DREESEN Address 104 BRIDGE RD., NORFOLK, NE 68701

LOG OF WELL	
Depth ft. --to--	Description
0- 10	BRN CLAYS
10- 50	BRN/TAN CLAY
50- 70	BRN & BLUE CLAY
70-175	GRAY CLAY, SOME SILTY
175-215	RED,GRAY, & YEL SHALE
215-241	BLUE SHALE
241-246	FINE SS, LITTLE SHALE
246-262	FINE WHITE SS
262-265	YEL/WHITE SHALE

WELL COMPLETION RECORD

Drilling Method: ROTO/WATER

Depth (from ground level), Ft. 258'
Date Completed 10/14/98

Casing: Length, Ft. 243'; Dia.In. 4"
Wall Thickness, Inc. .214"; type PVC

Screen: Length, Ft. 15' Dia.In. 4"
Type PVC WOP, MONOFLEX, slot Size .020

Drop Pipe: Length, Ft. 140' Dia.In. 1 1/4"

Water Level, Surface to top of water, Ft.:
Static 103' M, Pumping 110' EST

Yield: 20 ggm, Measured ☒ , Est. ☐
Chlorination Completed Yes ☒ No ☐

The above information including "Log of Well" is a true record of the job performed by me.

Driller [signature] (Signed)

Address P. O. BOX 308
Hickman, Nebraska 68372-0308

Date 13 APRIL 1999

REMARKS NITRATE NITROGEN 0.7p.p.m.
BACTERIOLOGICAL O.K.

DO NOT WRITE BELOW THIS DOUBLE LINE

Health Department forwarded copy of record to Nebraska Conservation and Survey Department for Scientific Record ☐

FORM 23-4