Lincoln-Lancaster County Health Department

ENVIRONMENTAL HEALTH DIVISION
3140 N STREET · LINCOLN, NE 68510-1514 (402) 441-8000

Permit

SEWAGE INSTALLATION
SEPTIC SYSTEM

Establishment

KEVIN J WIESER
T9N R5E SEC 23
LOT 17IT
8333 W DENTON RD-DENTON

Permitee

KEVIN J WIESER
8333 W DENTON RD
DENTON NE 68339

Permit # 00380214801

Issued 02/07/00
Expires 08/07/00
Revenue Code 3157

FEES: $150.00

TOTAL: $150.00

Leon F. Vinci, MPH, Health Director

• POST IN A PROMINENT PLACE • NOT TRANSFERABLE

011695

Lincoln-Lancaster County Health Department
Environmental Health Division
3140 "N" Street • Lincoln, NE 68510-1514
Phone: 402-441-8022

A

Permit Number: 00380248

Sewage Disposal System

Request for Site Clearance and Permit

Include Form B, Form C and Applicable Fees with this Application.

☒ Septic System ☐ Lagoon ☐ Other (Refer to Form C)

The undersigned hereby requests site clearance and permit to construct a Sewage Disposal System in conformance with appropriate resolution or ordinance, as described herein:

PLEASE PRINT OR TYPE

A. System Location (Indicate correct number and street)

Address 8333 West Denton Rd (no rural route) City Denton NE, Zip 68339

Legal Description ____ ____ 23 9N 5E ____ ____ ____ 17 I.T.
1/4 1/4 Section Township Range Subdivision Addition Block Lot

Geographical Location (if known): Longitude ____ Latitude ____

☐ Check if system mail address is not the same as the owner's address

B. Owner

Name Kerri/Melanie Kerri Wieser Signature Kerri/Melanie

Address 8333 West Denton City/State/Zip Denton, NE 68339

☐ Check if owner designed system Home Phone 402 797 2018 Work Phone 402 797 2032

C. Contractor

Name Larry Schwarck Company Name ____

Address ____ City/State/Zip ____

☑ Check if contractor designed system Work Phone ____

D. Engineer/Installer ☐ Check and complete if engineer designed system

Designer Name ____ Firm ____ Work Phone ____

E. This System Will Serve a

☒ Residential Dwelling Number of Bedrooms 3 Is there a Whirlpool Bathtub (YES) NO

☐ Commercial Establishment/Other Facility Specify ____

Design flow in gallons per day ____ Type of Wastewater: ☒ Domestic ☐ Non-Domestic.

DO NOT WRITE BELOW THIS LINE

Approval Process ☐ Municipal Code 24.38 ☒ County Resolution No. 2832

1. **Health Department** Date rec'd 1/12/00 Date frwd 1/12/00 **ACTION** ☒ Approved ☐ Disapproved Signature Jerrold C. Hood
2. **Supt. Bldg. Insp. or Village Clerk** Date rec'd 1-20-00 Date frwd 1-20-00 **ACTION** ☒ Approved ☐ Disapproved Signature Charlott J. Bass
3. **City or County Engineer** Date rec'd 1-25-00 Date frwd 1-25-00 **ACTION** ☒ Approved ☐ Disapproved Signature [illegible]

8/16/00 after review I believe I was the one that inspected this & I think he was

Installation Final Written Approval

By Jerrold C. Hood R.E.H.S.

Date AUGUST 16, 2000

contacted by cell phone to stop here, he was not carrying the permit along. J.C.H.

Business Office Use Only

Date Rec'd 01/11/00

Amt Paid 150.00

Rec'd By LS Cash/Check No. 2121

FORM 23-100 10-96 White - Health Dept. Yellow - Engineer Pink - Bldg. Inspector

Lincoln-Lancaster County Health Department
Environmental Health Division
3140 "N" Street • Lincoln, NE 68510-1514
Phone: 402-441-8022

D

Permit Number: 003802148

Sewage Disposal System

As Built Plans & Specifications

Date 9-23-99

System Location (Indicate correct number and street)

Address 8333 W Denton Rd. (no rural route) City _____ NE, Zip _____

A. Building Sewer

1. Material: Class 160
   Diameter: _____ in.
2. Distance above basement floor: _____ in.
   or distance below basement floor: 18 in.
3. Distance between dwelling and septic tank: 48' ft.
4. Number of clean-outs: _____
5. Distances to: well or suction line _____ ft.
   stream _____ ft.
   pressure line _____ ft.
   property line _____ ft.

B. Septic Tank

1. Material: Precast
   Number of compartments: _____
2. Capacity: 1250 gal.
3. Factory built: ☑ Yes ☐ No
4. Manholes: Over inlet, diameter _____ in.
   Over outlet, diameter _____ in.
   Riser: ☐ above ☐ below grade _____ in.
5. Inlet: ☐ baffle ☐ tee
6. Outlet: ☐ baffle ☐ tee
7. Depth to top of tank, below unfinished grade: 10' in.
8. Distances to: Well or suction line _____ ft.
   Stream _____ ft.
   Pressure line _____ ft.
   Property line _____ ft.

C. Distribution Box

1. Material: plastic
   Number available outlets: _____
2. Factory built: ☑ Yes ☐ No
3. Distance from septic tank: 23' ft.

D. Absorption Field


(Provide as-built drawings on back of this form)

1. Type: ☐ Half rounds ☐ Perforated pipe
   Diameter of half round: Infiltrator 15"
   or perforated pipe: _____
   Material: ☐ fiberglass ☑ plastic ☐ concrete
   ☐ other _____
2. Lateral lines: Number 2
   Length of each line: 100 ft. 60 ft.
   _____ ft. _____ ft., _____ ft.
3. Trench dimensions: Width 4 ft.
   Slope — in/100 ft.
   Average depth 30 in
4. Filter material: Road Gravel
   Depth of material 15 in.
5. Distances to: Well or suction line _____ ft.
   Stream _____ ft.
   Pressure line _____ ft.
   Property line _____ ft.

Indicate North with Arrow

Complete "As Built" drawing on back of this form.


Individual Sewage System Design (Example)

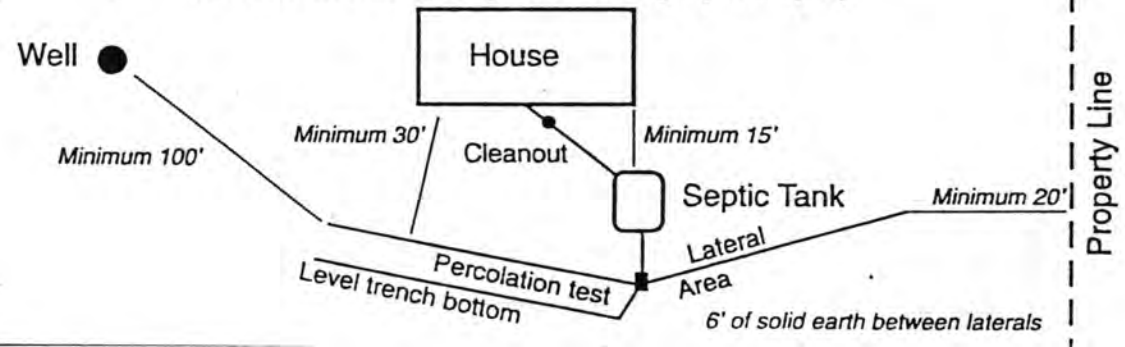

As Built Drawing

by Lary Schwanke

8333 West Denton

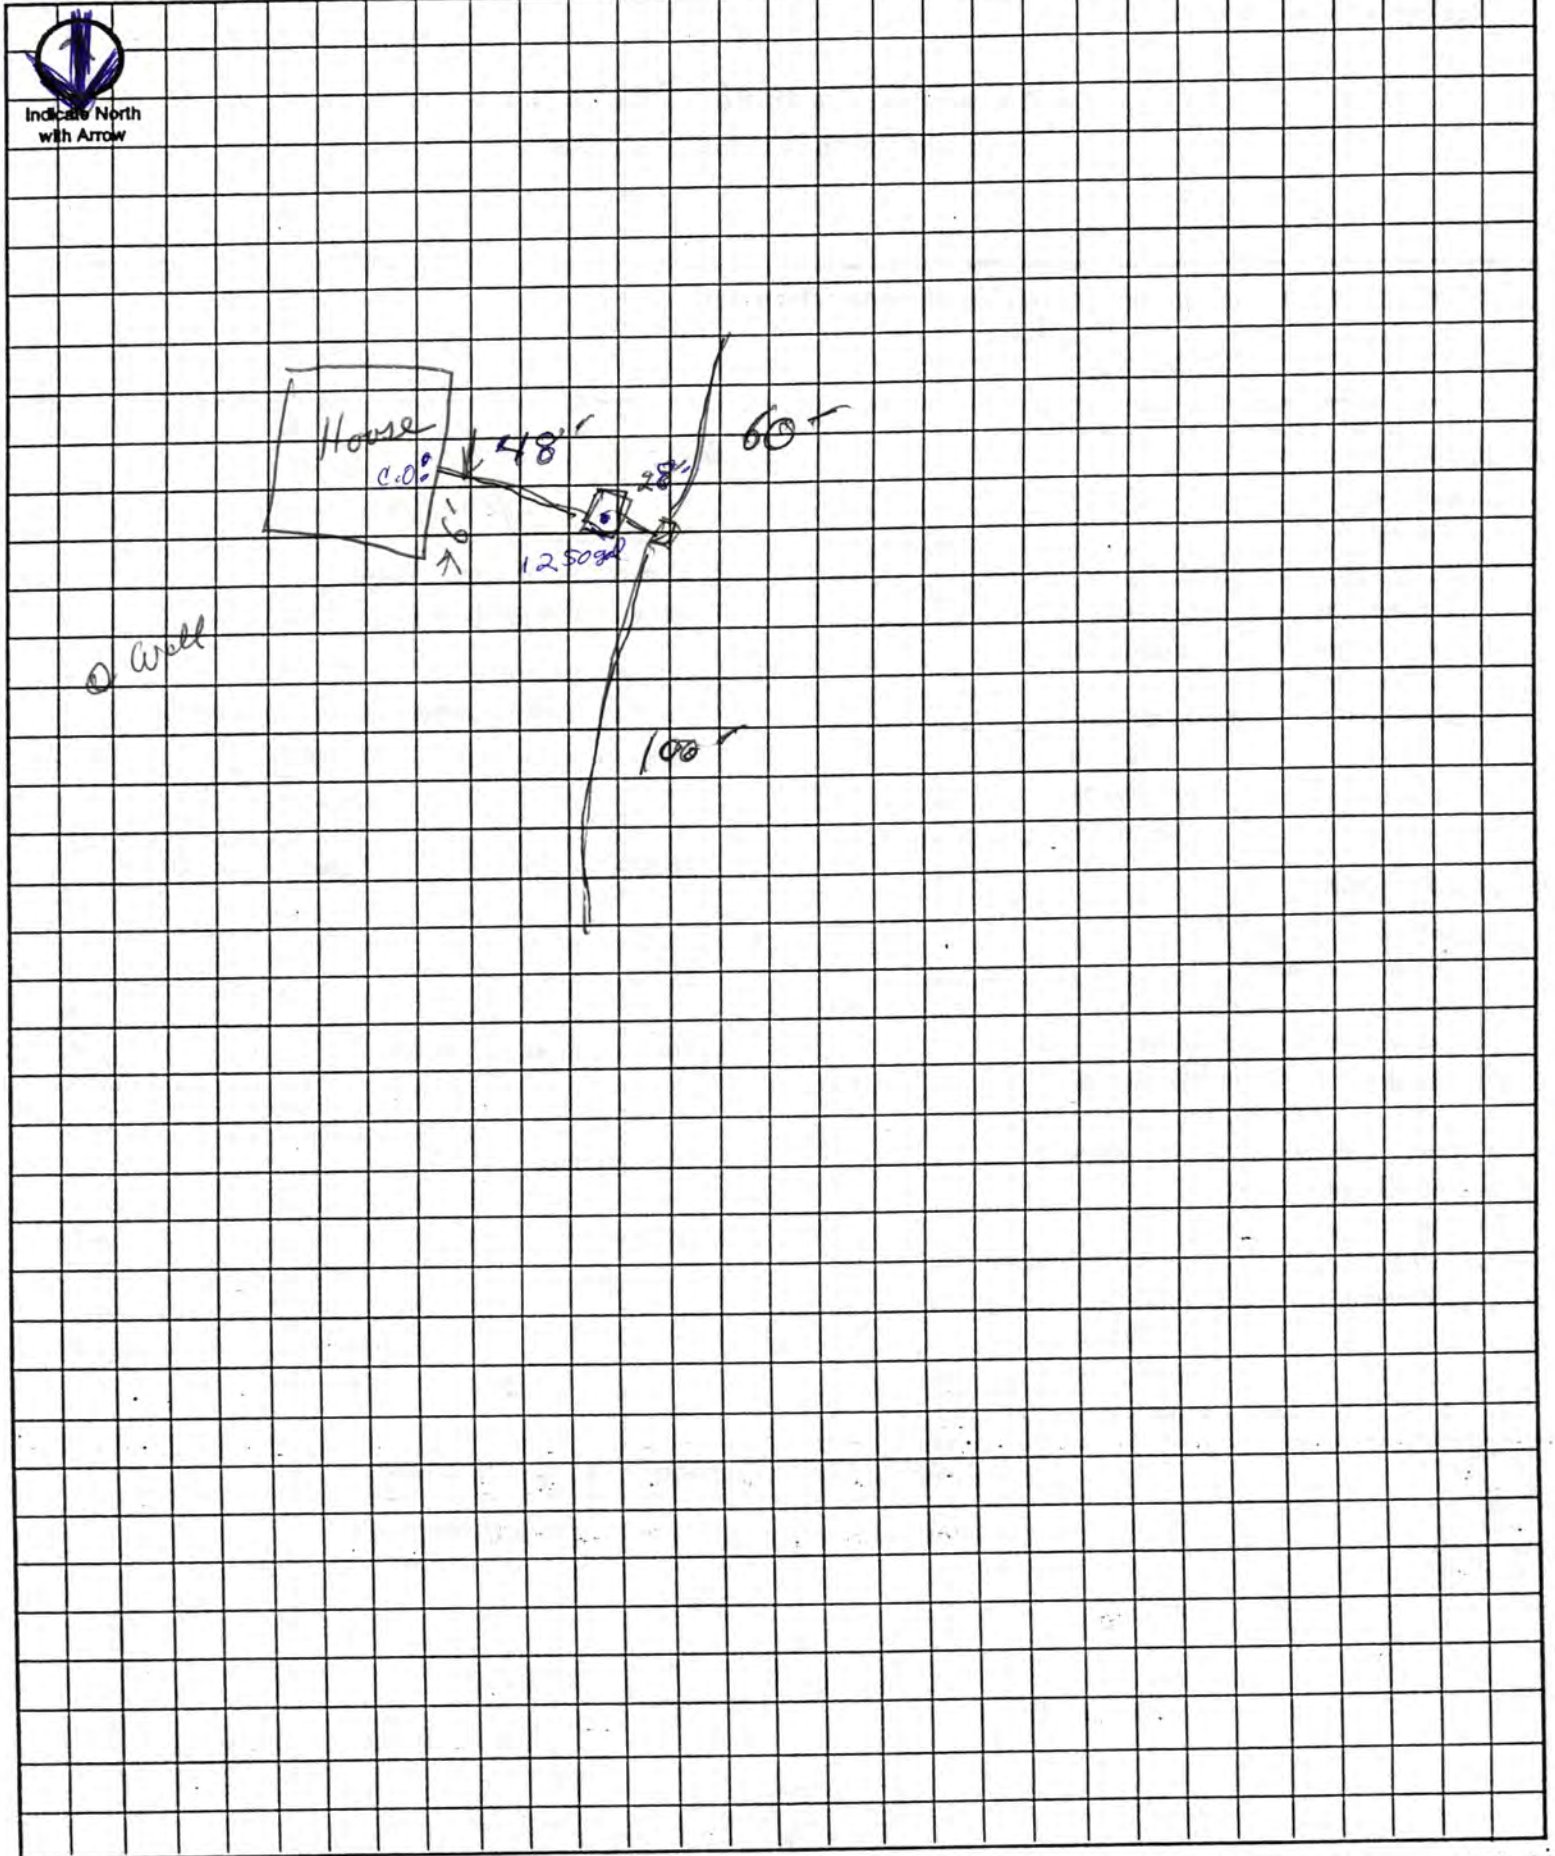

Approximate Scale: _____ ft. = _____ grid line/s