LINCOLN-LANCASTER COUNTY HEALTH DEPARTMENT

2200 ST. MARYS
LINCOLN, NEBRASKA 68502

FILE NO. 2173-C

INDIVIDUAL SEWAGE SYSTEM CONSTRUCTION — TYPE OF PERMIT

AUGUST 5, 1985 — THIS PERMIT EXPIRES

LARRY WOOD/PAUL VON GILLERN 18100 NO. 1st DAVEY, NE 68336
ISSUED TO — ADDRESS

T9N; R5E; Sec 34 E½ NW¼ W½ NE¼
LEGAL DESCRIPTION

REMARKS: NON TRANSFERABLE NEW CONSTRUCTION

PERMIT	INSPECTION FEE	OCCUPATION TAX	TOTAL
$ 60.00	$	$	$ 60.00
ACCOUNTING NO.	ACCOUNTING NO.	ACCOUNTING NO.	CODE
	110.16	148.14	6-2

RECEIPTED BY	DATE	AMOUNT
[illegible]	2685	60.00

VALID RECEIPT ONLY IF RECEIPTED IN THIS SPACE

HEALTH
ISSUING OFFICER

THIS PERMIT IS ISSUED AS PROVIDED BY COUNTY RESOLUTION NO. 2832

20109-0977

LARRY WOOD

REC'D FEB 4 1985

FORM 20103-0477
REQUEST FOR SITE CLEARANCE AND PERMIT
FOR INDIVIDUAL SEWAGE DISPOSAL SYSTEM
City Ordinance No. 9150 ☐
County Resolution No. 2832 ☒

LINCOLN-LANCASTER COUNTY HEALTH DEPARTMENT
Division of Environmental Health
2200 St. Marys Avenue
Lincoln, Nebraska 68502
Phone: 471-7800

A

FILING FEE: $ 60.00

FILE NO. 2173-C

DATE: 11-10-84

The undersigned hereby requests SITE CLEARANCE and PERMIT to construct an Individual Sewage Disposal System in conformance with appropriate resolution or ordinance, as described herein:

1. Legal description of property: Twp. 9N ; Range 5E ; Section 34 ; E½NW¼ W½ NE¼
   Block _____ : Lot _____ : Addition _____
   Street Address _____

2. Property Use: Residential ☒ ; Commercial ☐ Other Use ☐
   No. of Bedrooms 3 . Describe _____

3. Type of Individual Sewage Disposal System: Septic Tank ☒ ; Other ☐

4. Distance to public sewer: _____ ft.

c/o Larry's Wood
c/o Lawrence Gillen
Signature of Applicant (Owner or Lessee)

18100 N 1st Davey, Ne 68336
Address

(Do not write below this double line)

1. Health Department: Date Rec'd. 2/4/85. Date Frwd. 2/5/85. ACTION: Approved ☒ Disapproved ☐ Signature: Jerrold E. Head

2. Supt. Bldg. Insp.: or Village Clerk: Date Rec'd. 2/5/85. Date Frwd. 2/5/85. ACTION: Approved ☒ Disapproved ☐ Signature: Larry N. Isherwood

3. City or County Engineer: Date Rec'd. 2/5/85. Date Frwd. 2/5/85. ACTION: Approved ☐ Disapproved ☒ Signature: Larry Worrell

REMARKS OR REASONS FOR DISAPPROVAL _____


Site Visits:
Date: 11/19/84 by: J.C.H.
Date: _____ by: _____
Date: _____ by: _____

White: Health Dept. Copy
Yellow: Engineers Copy
Pink: Bldg. Inspector's Copy

INSTALLATION FINAL WRITTEN APPROVAL
Date: _____ By: _____

AS BUILT DRAWING OF SYSTEM

DATE 11-10-84 INSTALLER Paul Leon Gilleon

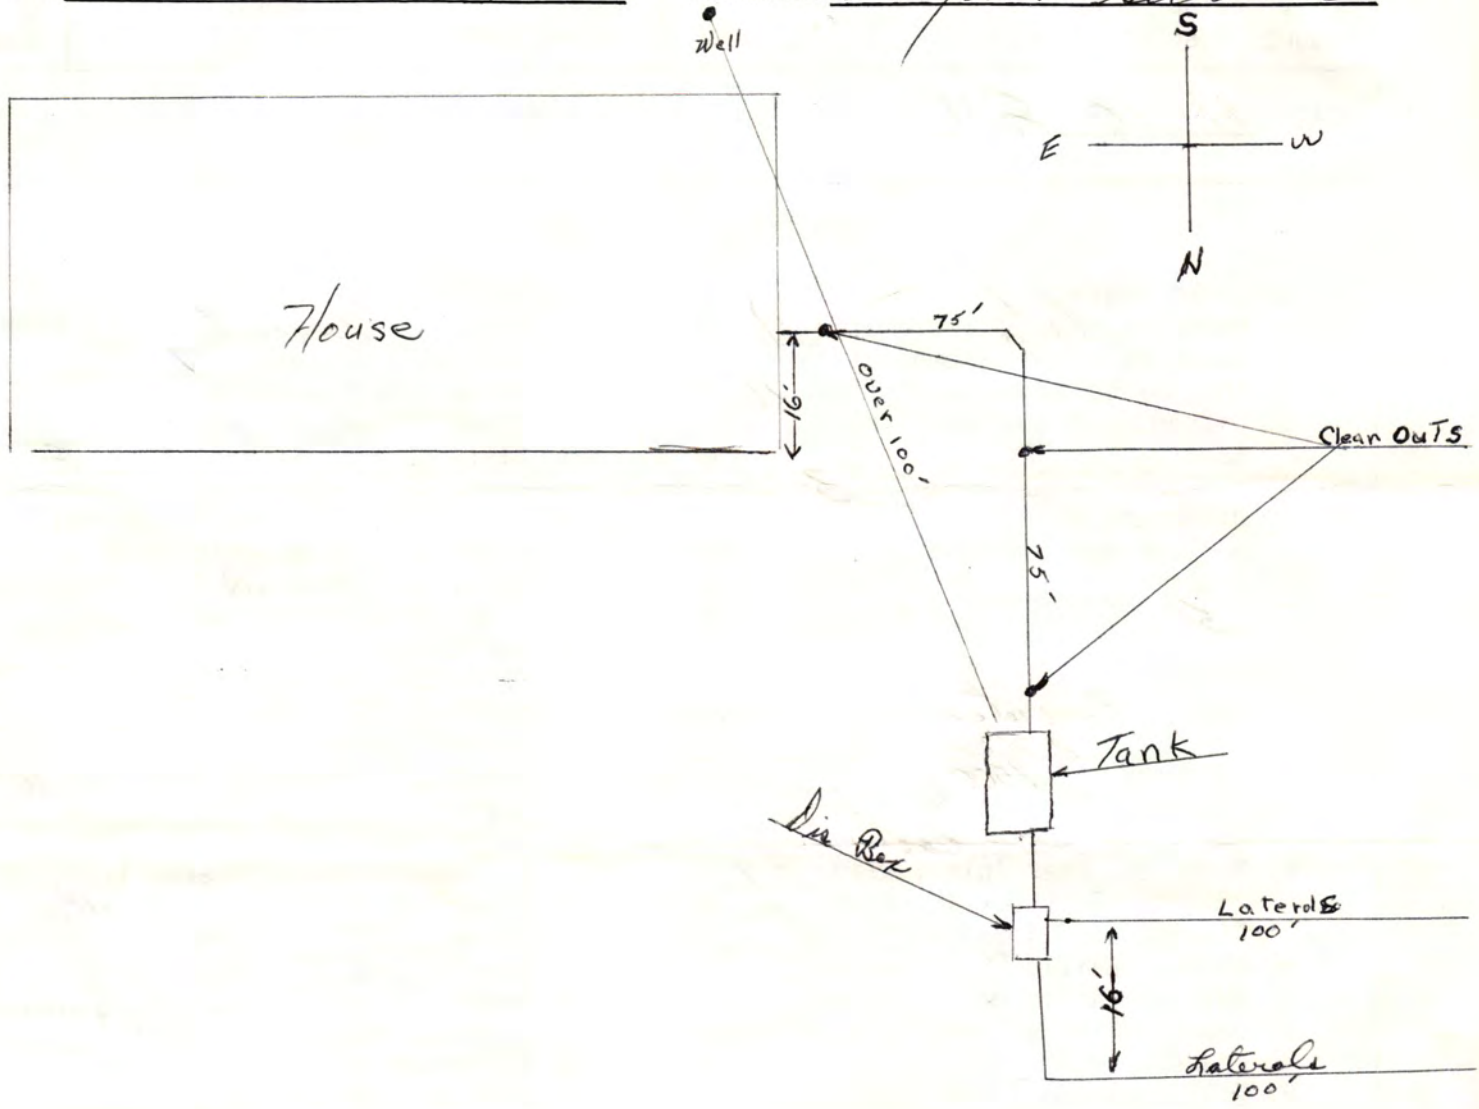

FORM 20104-0477
PLANS & SPECIFICATIONS FOR SEWAGE DISPOSAL SYSTEM (Annex to Application)
City Ordinance No. 9150 ☐
County Resolution No. 2832 ☐

LINCOLN-LANCASTER COUNTY HEALTH DEPARTMENT
Division of Environmental Health
2200 St. Marys Avenue
Lincoln, Nebraska 68502
Phone: 471-7800

D

DATE: 11-10-84

FILE NO. _____


SPECIFICATIONS AS BUILT

A. BUILDING SEWER:
1. Material Plastic ; Diameter 4 in.
2. Distance above basement floor _____ in., or below basement floor 16 in.
3. Distance between dwelling and septic tank _____ ft.
4. Number of clean-outs 3 .
5. Distances to:
Well or Suction Line _____ ft.;
Stream _____ ft.; Pressure Line 50 ft.; Property Line _____ ft.

B. SEPTIC TANK:
1. Material Concrete ; No. of compartments one .
2. Capacity 1500 gals.;
3. Factory Built: Yes ☒ No ☐
(Company Gue-Cast)
4. Manholes: Over Inlet; diam. 24 in.
Over Outlet; diam. 8 in.
Riser Above ☐ Below ☐ Grade ___ in.
5. Inlet: Baffle ☒ ; or Tee ☐
6. Outlet: Baffle ☒ ; or Tee ☐
7. Depth of top of tank below finished grade 12 in.
8. Distances to:
Well or Suction Line _____ ft.;
Stream _____ ft.; Pressure Line 50 ft.; Property Line _____ ft.

C. DISTRIBUTION BOX:
1. Material Concrete ; Number - available outlets 7 .
2. Factory Built: Yes ☒ No ☐
(Company Gue Cast)
3. Distance from Septic Tank 8 ft.

D. ABSORPTION FIELD: (Provide as built drawings on back of this form)
1. Type: Half Rounds ☒ Perforated Pipe ☐
Diameter of Half Round 20" or
Perforated Pipe _____ .
Material: fiberglass ☐ ; plastic ☐ ;
concrete ☒ ; other _____ .
2. Lateral Lines:
Number 2 ; Length of each line 100 , 100 , _____ , _____ , _____ ft.;
Total length of laterals 200 ft.;
Distance between lateral lines 16 ft.
3. Trench dimensions: Width 4'6" ft.;
Slope 2" in/100 ft.; Average Depth 36" in.
4. Filter Material: Road Gravel
Depth of Material 24" in.
5. Distances to:
Well or Suction Line _____ ft.;
Stream _____ ft.; Pressure Line 50 ft.; Property Line _____ ft.

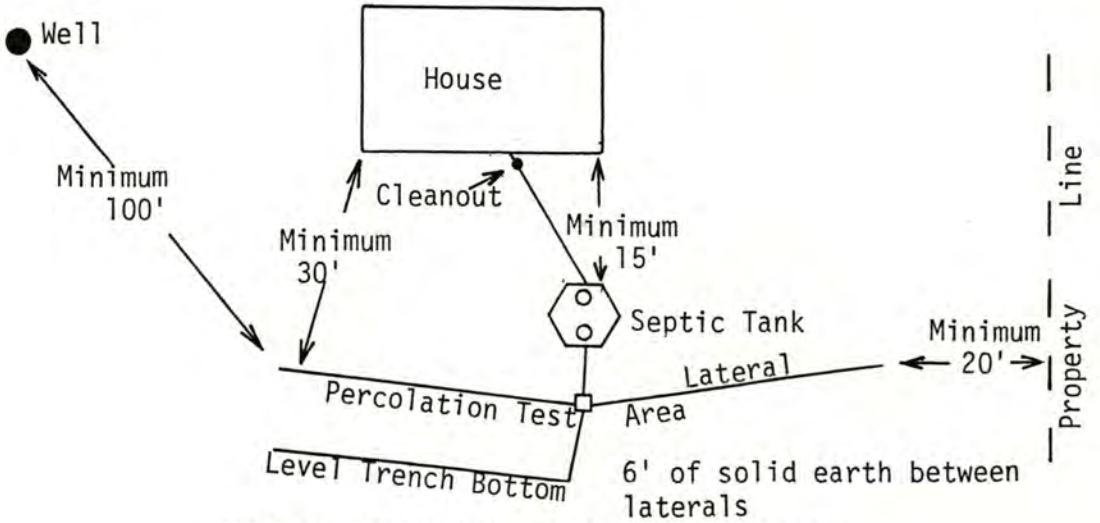

TYPICAL INDIVIDUAL SEWAGE SYSTEM DESIGN