LINCOLN-LANCASTER COUNTY HEALTH DEPARTMENT

ENVIRONMENTAL HEALTH DIVISION

2200 St. Marys Ave Lincoln, NE 68502-3785 (402) 441-8000

NON TRANSFERABLE

PERMIT

Permit
SEWAGE INSTALLATION

No. 93380101101

Issued 06/15/93
Expires 12/15/93
Revenue Code 18754

Establishment
MIKE REZAC
T9N R6E SEC 19
YANKEE HILL LAKE BLK 4 LOT 7

FEES: $150.00

TOTAL $150.00

Permittee
MIKE REZAC
1830 W BURNHAM
LINCOLN NE 68522

Issued By M. Jane Ford
Health Director

THIS LICENSE OR PERMIT IS ISSUED SUBJECT TO REVOCATION AS PROVIDED BY LAW
"POST IN A PROMINENT PLACE"

FORM 20103-0477
REQUEST FOR SITE CLEARANCE AND PERMIT
FOR INDIVIDUAL SEWAGE DISPOSAL SYSTEM
City Ordinance No. 9150 ☐
County Resolution No. 2832 ☒

LINCOLN-LANCASTER COUNTY HEALTH DEPARTMENT
Division of Environmental Health
2200 St. Marys Avenue
Lincoln, Nebraska 68502
Phone: 471-7800

A

FILING FEE: $ 150.00

FILE NO. _____

DATE: 6/15/93

The undersigned hereby requests SITE CLEARANCE and PERMIT to construct an Individual Sewage Disposal System in conformance with appropriate resolution or ordinance, as described herein:

1. Legal description of property: Twp. 9N ; Range 6E ; Section 19 ;
   Block ~~81~~ 1 : Lot 7 : Addition Yankee Hill Lake Sus.
   Street Address _____

2. Property Use: Residential ☒ ; Commercial ☐ Other Use ☐
   No. of Bedrooms 3 . Describe _____

3. Type of Individual Sewage Disposal System: Septic Tank ☒ ; Other ☐

4. Distance to public sewer: _____ ft. ~~WILL INSTALL WHATEVER SOIL PERCOLATION TEST INDICATES~~ EXPERIMENTAL

Signature of Applicant (Owner or Lessee)

1830 West Burnham.
Address

(Do not write below this double line)

1. Health Department: Date Rec'd. 6/15/93. Date Frwd. 6/15/93. ACTION: Approved ☒ Disapproved ☐ Signature: Jerrold C. Hood

2. Supt. Bldg. Insp.: or Village Clerk Date Rec'd. 6/15/93. Date Frwd. 6/15/93. ACTION: Approved ☒ Disapproved ☐ Signature: [signature]

3. City or County Engineer: Date Rec'd. 6-15-93. Date Frwd. 6-15-93. ACTION: Approved ☐ Disapproved ☐ Signature: [signature]

REMARKS OR REASONS FOR DISAPPROVAL _____

Site Visits:
Date: 10/22/93 by: J.C.H.
Date: _____ by: _____
Date: _____ by: _____

INSTALLATION FINAL WRITTEN APPROVAL *
Date: 12/13/93 By: Jerrold C. Hood

White: Health Dept. Copy
Yellow: Engineers Copy
Pink: Bldg. Inspector's Copy

*

FORM 23-43

FORM 20104-0477
PLANS & SPECIFICATIONS FOR SEWAGE DISPOSAL SYSTEM (Annex to Application)
City Ordinance No. 9150 ☐
County Resolution No. 2832 ☐

LINCOLN-LANCASTER COUNTY HEALTH DEPARTMENT
Division of Environmental Health
2200 St. Marys Avenue
Lincoln, Nebraska 68502
Phone: 471-7800

D

DATE: _____

FILE NO: _____


SPECIFICATIONS AS BUILT

A. BUILDING SEWER:
1. Material PVC ; Diameter 4 in.
2. Distance above basement floor ____ in., or below basement floor 18 in.
3. Distance between dwelling and septic tank 51 ft.
4. Number of clean-outs 0 .
5. Distances to:
Well or Suction Line 100+ ft.; Stream 100+ ft.; Pressure Line 50+ ft.; Property Line 50+ ft.

B. SEPTIC TANK:
1. Material Concrete ; No. of compartments ONE .
2. Capacity 1000 gals.;
3. Factory Built: Yes ☒ No ☐
(Company American Concrete)
4. Manholes: Over Inlet; diam. 16 in.
Over Outlet; diam. 10 in.
Riser Above ☐ Below ☒ Grade 16 in.
5. Inlet: Baffle ☒ ; or Tee ☐
6. Outlet: Baffle ☒ ; or Tee ☐
7. Depth of top of tank below finished grade 16 in.
8. Distances to:
Well or Suction Line 100+ ft.; Stream 100+ ft.; Pressure Line 50+ ft.; Property Line 50+ ft.

C. DISTRIBUTION BOX:
1. Material Concrete ; Number available outlets _____ .
2. Factory Built: Yes ☒ No ☐
(Company American Concrete)
3. Distance from Septic Tank 6 ft.


D. ABSORPTION FIELD: (Provide as built drawings on back of this form)
1. Type: Half Rounds ☒ Perforated Pipe ☐
Diameter of Half Round _____ or Perforated Pipe _____ .
Material: fiberglass ☐ ; plastic ☐ ; concrete ☒ ; other _____ .
2. Lateral Lines:
Number 2 ; Length of each line 100 , 100 , ____ , ____ , ____ ft.;
Total length of laterals 200 ft.;
Distance between lateral lines 12 ft.
3. Trench dimensions: Width 8 ft.; Slope 2 in/100 ft.; Average Depth 36 in.
4. Filter Material: Gravel
Depth of Material 30 in.
5. Distances to:
Well or Suction Line 100+ ft.; Stream 100+ ft.; Pressure Line 50+ ft.; Property Line 50+ ft.

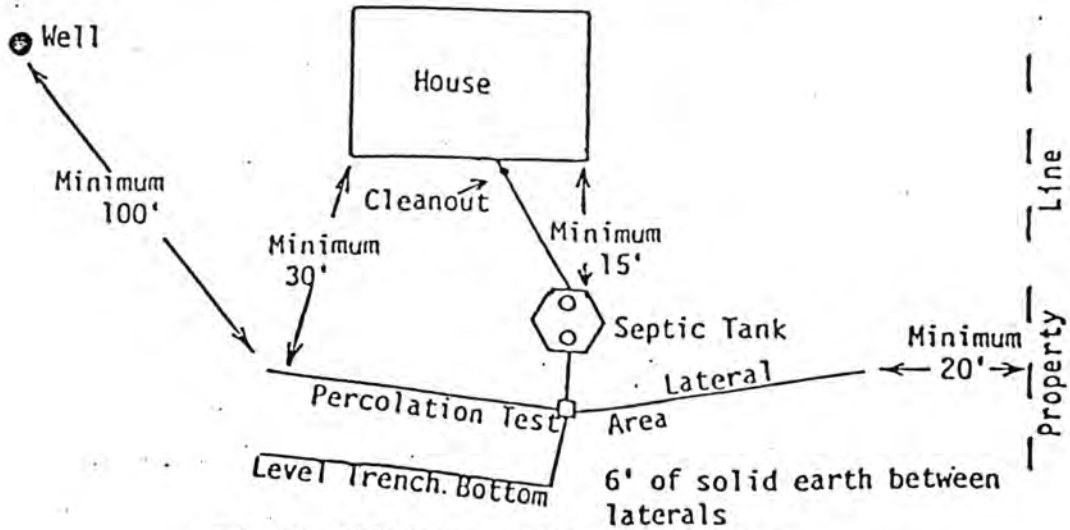

TYPICAL INDIVIDUAL SEWAGE SYSTEM DESIGN

Rezac Const.
5208 Deercrest

Installed By Light Tec
10-22-93

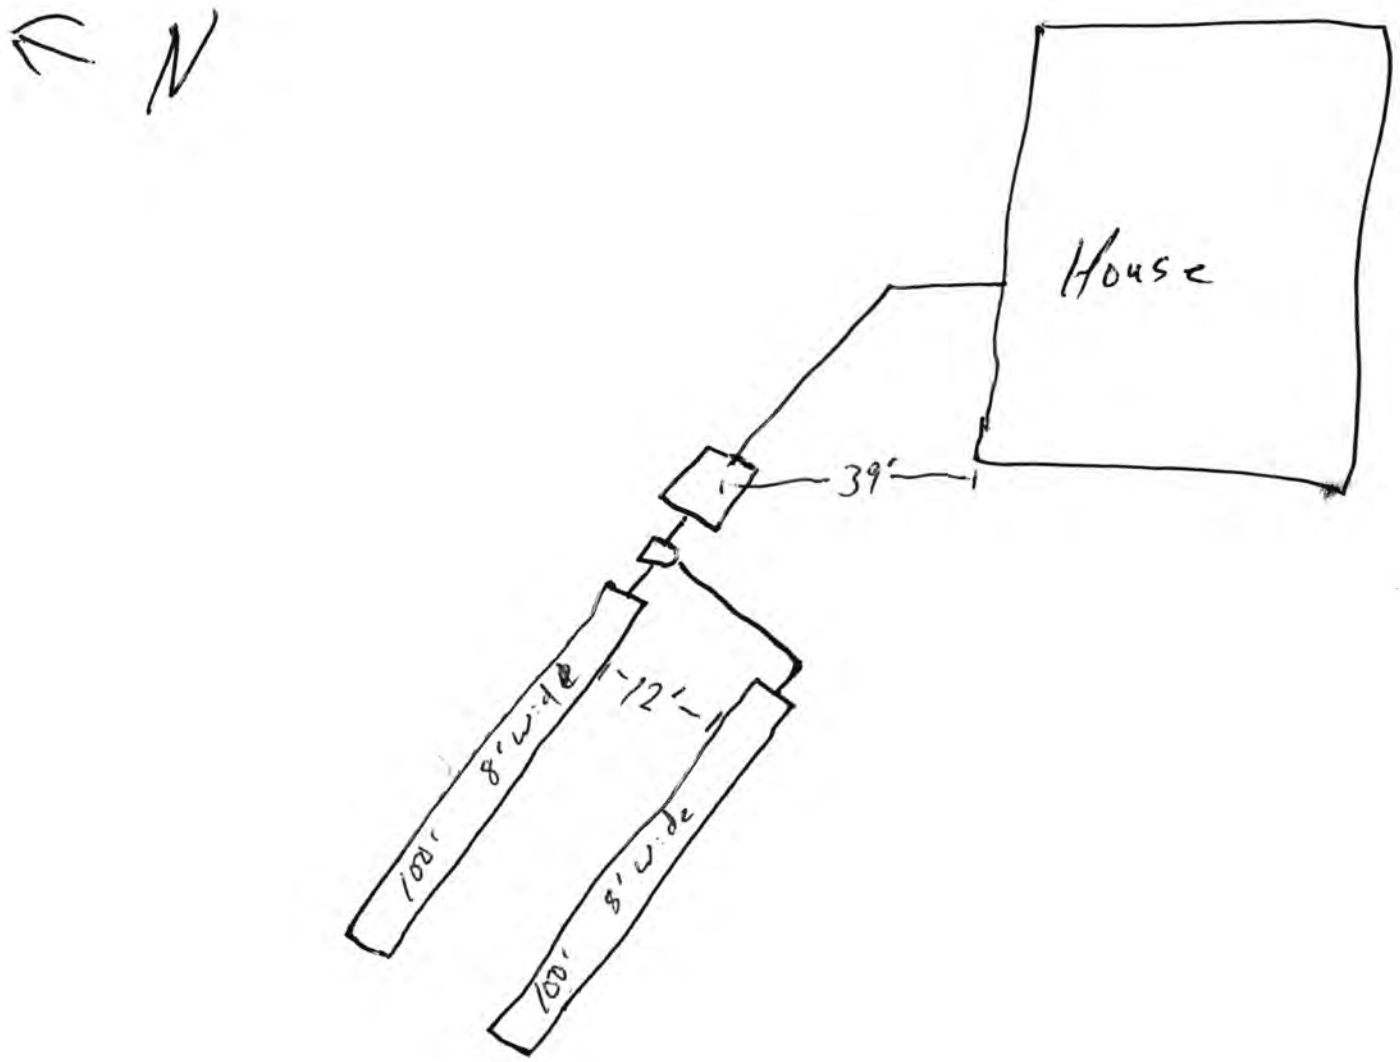

090

Lincoln-Lancaster County Health Department

2200 St. Mary's Avenue, Lincoln, Nebraska 68502 Phone: 441-8022

REAL ESTATE TRANSFER/LOAN APPROVAL FORM

This form must be completed and returned to request a real estate transfer inspection.

MAKE CHECK PAYABLE TO: Lincoln-Lancaster County Health Department or LLCHD

☐ Enclosed is $150.00. Allow two weeks for processing. Incomplete information will delay processing.

☐ Evaluation of the Individual Water System ☐ Evaluation of the Sewage Disposal System

Legal Description of Property: Street Address 5200 West Vincent

Twp 10 Range 6E Section 19 1/4 ___ 1/4 ___ Block 1 Lot 7 Addition York Hill Lots

Directions to Property _____

Location of Well Back of House. Tap Location: Inside ☐ Outside ☐

Location of Sewage System North of House. Year Installed 1993

	NAME	ADDRESS	PHONE
Present Owner:	Burt Basel Burt + Vivian Nelson	5200 West Vincent	
Tenant/Buyer:			
Return to:			

Signature of Applicant [signature] Address _____ Date ___/___/___

HEALTH DEPARTMENT USE ONLY

Date Received 12/13/93 Received $150.00 Check ☒ Cash ☐

PRELIMINARY STATUS--By Gerald C. Hook **DATE:** 12/14/93

WATER SYSTEM:	Approved	Disapproved	**SEWAGE SYSTEM**	**Additional Site Visits**
Construction	☒	☐	Approved ☐	Date 12/17/93 by L.CH
Bacteria 12-20-93	☒ 0 /ml	☒ 1 /ml	Provisional ☒	Date ___/___/___ by ___
Nitrate	☒ <0.1 ppm	☐ ___ ppm	Disapproved ☐	Date ___/___/___ by ___

Comments: PROVISIONAL APPROVAL ON SEWAGE SYSTEM BECAUSE THE SYSTEM IS CONSIDERED EXPERIMENTAL.

See Attached Letter ☐

FINAL STATUS

WATER SYSTEM: Approved: ☒ **SEWAGE DISPOSAL SYSTEM** Approved: ☐ Provisional Approval: ☒

Approved by Paul Wojtaszek Date 12/20/93

Approval or disapproval is based on State and local standards for construction, location and water quality. Inspection is based on visible construction and operation at the time of inspection. Approval or provisional approval does not imply or express a guarantee of system operations.

090

Rezac Const.
5208 Deercrest

Installed By Light Tec
10-22-93

