LINCOLN-LANCASTER COUNTY HEALTH DEPARTMENT

3140 "N" STREET
NON TRANSFERABLE

ENVIRONMENTAL HEALTH DIVISION
Lincoln, NE 68510-1514 (402) 441-8000

PERMIT

Permit

SEWAGE SYSTEM REPAIR
SEWAGE REPAIR/EXTENSION

No. 98390057701

Issued 04/10/98
Expires 10/10/98
Revenue Code 3157

PAID

FEES: $50.00

Establishment

ALLEN SNELL
4800 DEERCREST ST
DENTON NE 68339

TOTAL $50.00

Permittee

ALLEN SNELL
4800 DEERCREST ST
DENTON NE 68339

Gregg Wright MD.
Issued By ~~M. Jane Ford~~
Health Director

6353

THIS LICENSE OR PERMIT IS ISSUED SUBJECT TO REVOCATION AS PROVIDED BY LAW "POST IN A PROMINENT PLACE"

Individual Sewage Disposal System
Application to Alter, Extend or Repair

❒Municipal Code 24.38 ❒County Resolution Number 2832

Date: 4-9-98	File No.: 1236-C

The undersigned hereby applies for a permit to: ❒ **ALTER** ☒ **EXTEND** ❒ **REPAIR** an existing Individual Sewage Disposal System, in conformance with appropriate Ordinance or Resolution, as described in this application and drawings attached hereto.

1. **Legal description of property:**
   Township 9N Range 6E Section 19 1/4 Section _____
   Block 1 Lot 3 Addition YANKEE HILL LAKE
   Street Address 4800 W DEERCREST DR. 68339

2. **Property use:** ☒ residential ❒ commercial ❒ other use
   Number of bedrooms _____ Describe _____

3. **Type of Present Individual Disposal System:** ☒ septic tank ❒ lagoon ❒ other

4. **Description of proposed alteration, extension or repair:** 200 FT LATERAL

5. **Work to be done by:** ❒ owner ☒ contractor's name LAGNER CONST.

6. **Estimated project:** a. Repair, replace or minor extension with a cost of less than $400.00 (no fee required).
   b. Total cost is greater than $400.00 (Return fee with this application).
   c. A "construction permit" is required if the use, operation, location, or type of the system is being changed.

Print Name ALLEN SNELL JR. Address _____ Phone _____
Applicant Signature (owner or lessee) Allen Snell Jr

Please include the permit fee ($50.00) with this application

(Please do not write below this line)

Date rec'd 4-9-98 REVIEW: ☒ approved ❒ disapproved By: _____

Site visits:
Date 5/11/98 By J.C. Hood need drawing
Date _____ By _____
Date _____ By _____

Installation final written approval
Date 5/19/98 By Jerrold Hood

Return to: Lincoln-Lancaster County Health Department - Environmental Health Division
3140 "N" Street, Lincoln, NE. 68510
441-8022

Recd 4/10/98
$ 50.00
CK# 1208

White - EH Pink - Business Office Revised 1/98

SNell

Lincoln-Lancaster County Health Department
Environmental Health Division
3140 "N" Street • Lincoln, NE 68510-1514
Phone: 402-441-8022

D

Permit Number:

Sewage Disposal System

As Built Plans & Specifications

Date 5/5/98

System Location (Indicate correct number and street)

Address 4800 W DeerCrest DR (no rural route) City DENTON NE, Zip 68339

A. Building Sewer

1. Material: PLASTIC
   Diameter: 4 in.
2. Distance above basement floor: _____ in.
   or distance below basement floor: _____ in.
3. Distance between dwelling and septic tank: 71 ft.
4. Number of clean-outs: 2
5. Distances to: well or suction line OVER 100 ft.
   stream NA ft.
   pressure line NA ft.
   property line 40 ft.

B. Septic Tank

1. Material: CEMENT
   Number of compartments: 1
2. Capacity: 1000 gal.
3. Factory built: ☒ Yes ☐ No
4. Manholes: Over inlet, diameter _____ in.
   Over outlet, diameter _____ in.
   Riser: ☒ above ☐ below grade _____ in.
5. Inlet: ☒ baffle ☐ tee
6. Outlet: ☒ baffle ☐ tee
7. Depth to top of tank, below unfinished grade: 24 in.
8. Distances to: Well or suction line OVER 100 ft.
   Stream _____ ft.
   Pressure line _____ ft.
   Property line _____ ft.

C. Distribution Box

1. Material: CEMENT
   Number available outlets: 5
2. Factory built: ☒ Yes ☐ No
3. Distance from septic tank: 12 ft.

D. Absorption Field


(Provide as-built drawings on back of this form)

1. Type: ☒ Half rounds ☒ Perforated pipe
   Diameter of half round: _____
   or perforated pipe: 4"
   Material: ☐ fiberglass ☐ plastic ☒ concrete
   ☐ other PLASTIC
2. Lateral lines: Number _____
   Length of each line: 100 ft. 100 ft.
   60 ft. 100 ft., 100 ft.
3. Trench dimensions: Width 3 & 4 ft.
   Slope 3 in/100 ft.
   Average depth 2 in
4. Filter material: GRAVEL
   Depth of material 12" in.
5. Distances to: Well or suction line OVER 100 ft.
   Stream _____ ft.
   Pressure line _____ ft.
   Property line _____ ft.

Indicate North with Arrow


Complete "As Built" drawing on back of this form.

Individual Sewage System Design (Example)

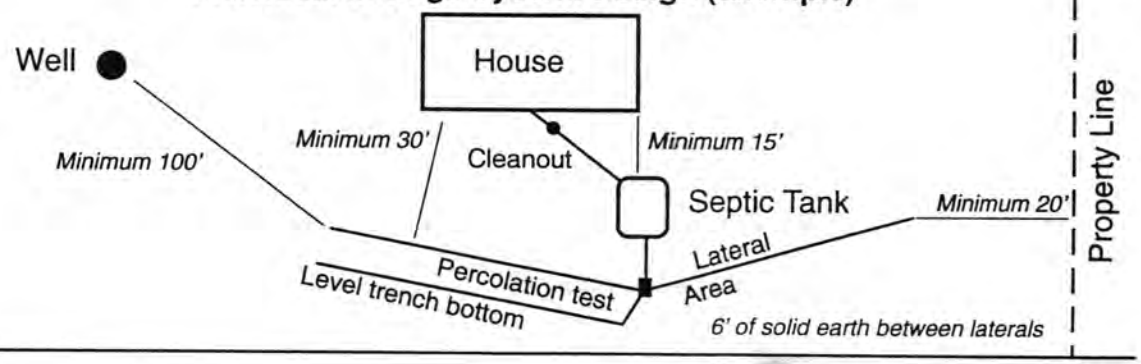

FORM 23-103 10-96

As Built Drawing

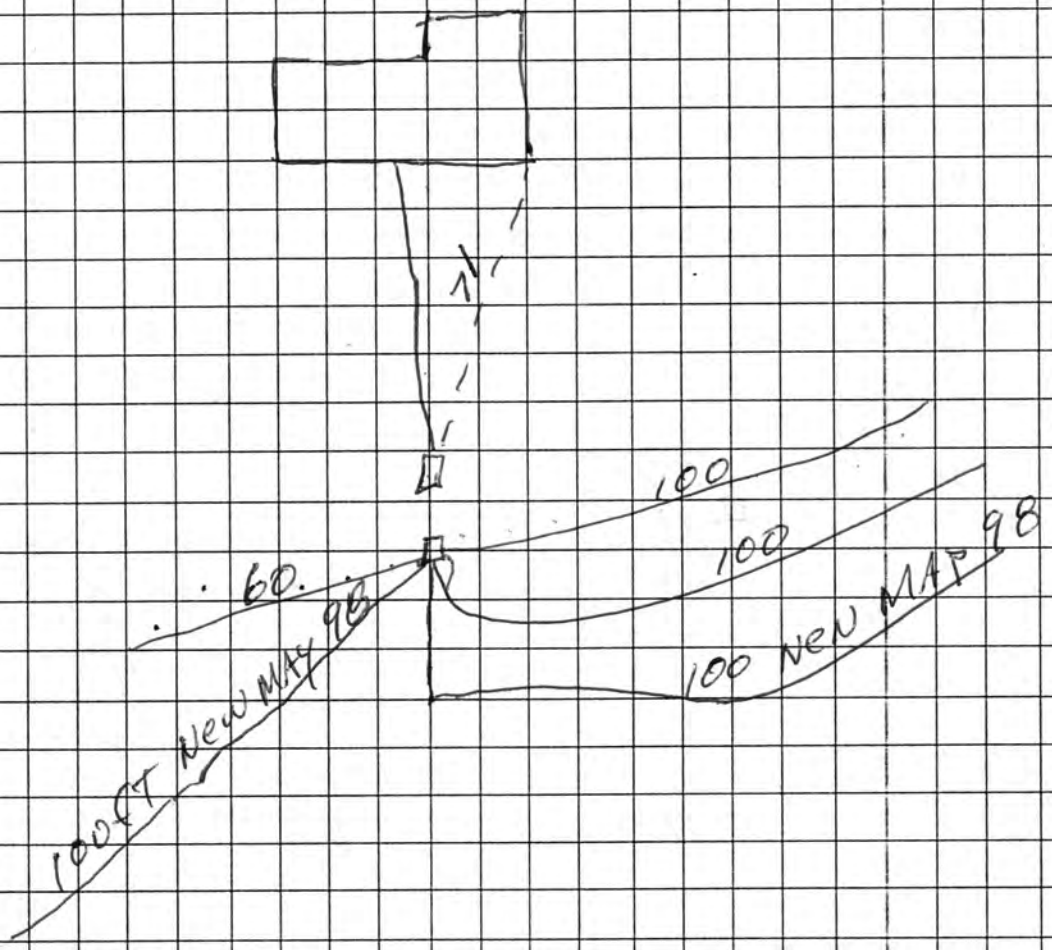

Approximate Scale: 10 ft. = 1 grid line/s