# LINCOLN-LANCASTER COUNTY HEALTH DEPARTMENT

Division of Environmental Health
2200 St. Marys Ave Lincoln, NE 68502 (402) 471-8000

**NON TRANSFERABLE**

PERMIT

SEWAGE INSTALLATION

No. 92380084801

Issued 05/29/92
Expires 11/29/92

ESTABLISHMENT

JAMES HENNESSY
T9N R6E SEC 19
YANKEE HILL LAKE 1ST BLK 2 LOT 8
7400 SW HUNTERS PLACE

FEES: Permit 018754 $150.00

Total $150.00

PERMITTEE

JAMES HENNESSY
2700 KIPLING CI
LINCOLN NE 68516

Issued By COUNTY HEALTH

VALID RECEIPT ONLY IF RECEIPTED IN THIS SPACE

| DATE | AMOUNT |
| --- | --- |
| 5/29/92 | PAID |

THIS LICENSE OR PERMIT IS ISSUED SUBJECT TO REVOCATION AS PROVIDED BY LAW

FORM 20103-0477
REQUEST FOR SITE CLEARANCE AND PERMIT
FOR INDIVIDUAL SEWAGE DISPOSAL SYSTEM
City Ordinance No. 9150 ☐
County Resolution No. 2832 ☒

LINCOLN-LANCASTER COUNTY HEALTH DEPARTMENT
Division of Environmental Health
2200 St. Marys Avenue
Lincoln, Nebraska 68502
Phone: 471-7800

A

FILING FEE: $_____

FILE NO._____

DATE: 5·22·92

The undersigned hereby requests SITE CLEARANCE and PERMIT to construct an Individual Sewage Disposal System in conformance with appropriate resolution or ordinance, as described herein:

1. Legal description of property: Twp. 9N ; Range 6E ; Section 19 ;
   Block 2 : Lot 8 : Addition YANKEE HILL LAKE, 1ST. ADDN.
   Street Address 7400 S.W. HUNTERS PLACE

2. Property Use: Residential ☒ ; Commercial ☐ Other Use ☐
   No. of Bedrooms 3 . Describe_____

3. Type of Individual Sewage Disposal System: Septic Tank ☑ ; Other ☐

4. Distance to public sewer: _____ft. WILL INSTALL WHATEVER PERCOLATION TEST INDICATES

JAMES HENNESSY
Signature of Applicant (Owner or Lessee)

2700 KIPLING CIR 68516
~~5757 DEERHAVEN DR, 68516~~
Address

(Do not write below this double line)

1. Health Department: Date Rec'd. 5/26/92 . Date Frwd. 5/26/92 . ACTION: Approved ☒ Disapproved ☐ Signature: Jerrold C. Nood

2. Supt. Bldg. Insp.: or Village Clerk Date Rec'd. 5/26/92 . Date Frwd. 5/26/92 . ACTION: Approved ☐ Disapproved ☐ Signature:_____

3. City or County Engineer : Date Rec'd. 05/26/92 . Date Frwd. _____ . ACTION: Approved ☒ Disapproved ☐ Signature:_____

REMARKS OR REASONS FOR DISAPPROVAL_____

Site Visits:
Date: 6/12/92 by:_____
Date: 6-14-92 by: P.D.
Date: 6-20-92 by:_____


White: Health Dept. Copy
Yellow: Engineers Copy
Pink: Bldg. Inspector's Copy

INSTALLATION FINAL WRITTEN APPROVAL
Date: 10/29/92 By: John Johnson
DRAWINGS Rec'd

FORM 23-43

1600 Hunter Place

Installed By Vogt TIT

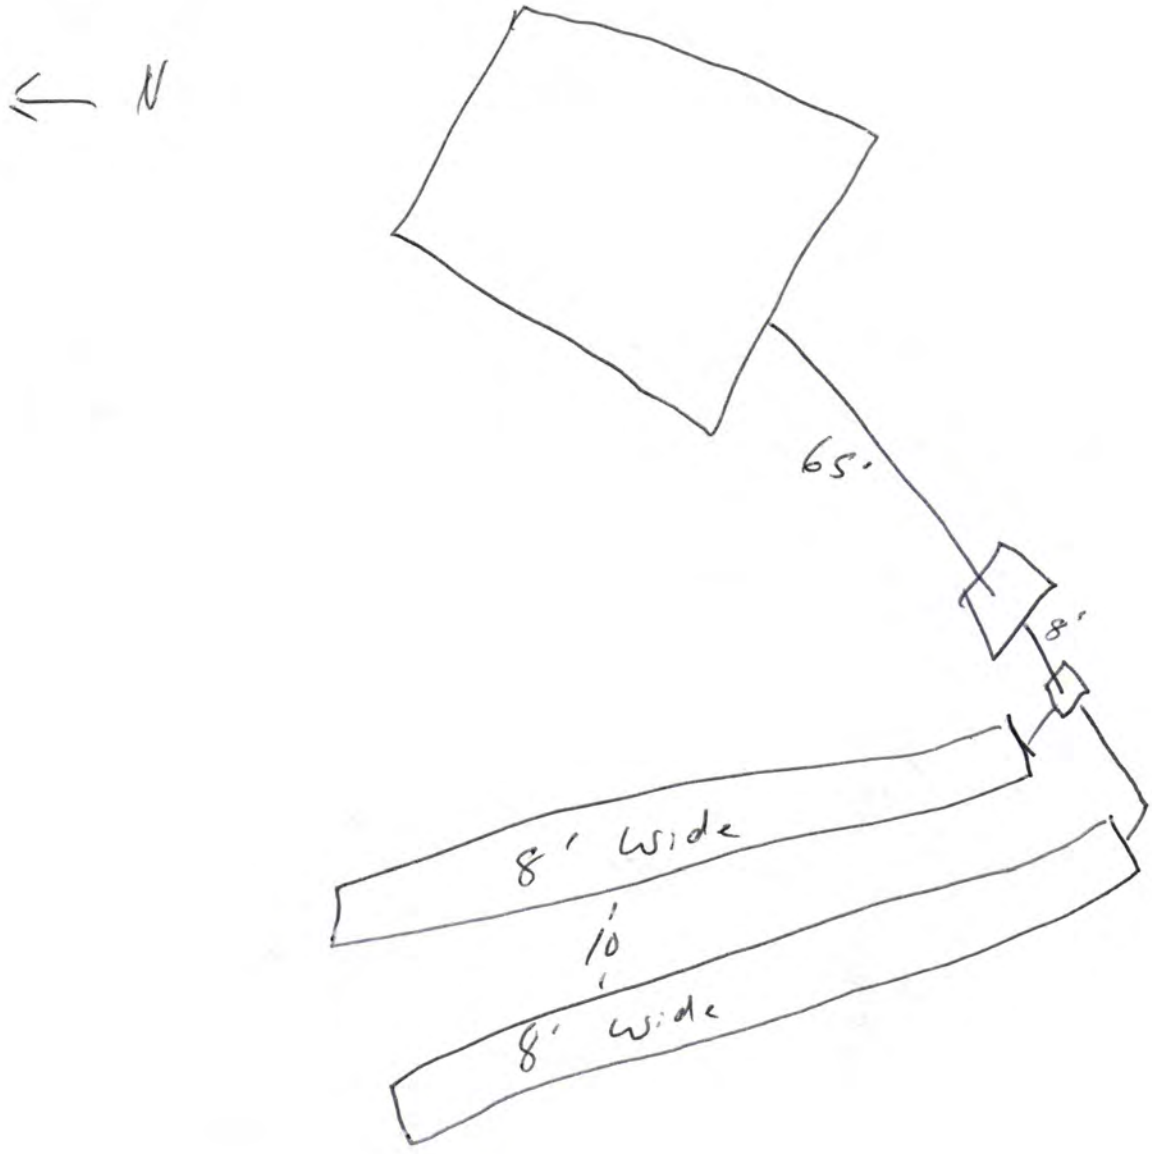

FORM 20104-0477
PLANS & SPECIFICATIONS FOR SEWAGE DISPOSAL SYSTEM (Annex to Application)
City Ordinance No. 9150 ☐
County Resolution No. 2832 ☐

LINCOLN-LANCASTER COUNTY HEALTH DEPARTMENT
Division of Environmental Health
2200 St. Marys Avenue
Lincoln, Nebraska 68502
Phone: 471-7800

D

DATE: _____

FILE NO: _____


## SPECIFICATIONS AS BUILT

A. BUILDING SEWER:
1. Material PVC ; Diameter 4 in.
2. Distance above basement floor ____ in., or below basement floor 18 in.
3. Distance between dwelling and septic tank 65 ft.
4. Number of clean-outs None .
5. Distances to:
Well or Suction Line 100+ ft.; Stream 100+ ft.; Pressure Line 20+ ft.; Property Line 20+ ft.

B. SEPTIC TANK:
1. Material Concrete ; No. of compartments 1 .
2. Capacity 1000 gals.;
3. Factory Built: Yes ☒ No ☐
(Company American Concrete )
4. Manholes: Over Inlet; diam. 16 in.
Over Outlet; diam. 8 in.
Riser Above ☐ Below ☐ Grade ___ in.
5. Inlet: Baffle ☒ ; or Tee ☐
6. Outlet: Baffle ☒ ; or Tee ☐
7. Depth of top of tank below finished grade 16 in.
8. Distances to:
Well or Suction Line 100+ ft.; Stream 100+ ft.; Pressure Line 20+ ft.; Property Line 20+ ft.

C. DISTRIBUTION BOX:
1. Material Concrete ; Number available outlets 5 .
2. Factory Built: Yes ☒ No ☐
(Company American Concrete )
3. Distance from Septic Tank 8 ft.

D. ABSORPTION FIELD: (Provide as built drawings on back of this form)
1. Type: Half Rounds ☐ Perforated Pipe ☒
Diameter of Half Round ____ or Perforated Pipe 4" .
Material: fiberglass ☐ ; plastic ☒ ; concrete ☐ ; other ____ .
2. Lateral Lines:
Number 2 ; Length of each line 100 , 100 , ____ , ____ , ____ ft.;
Total length of laterals 200 ft.;
Distance between lateral lines 10 ft.
3. Trench dimensions: Width 8 ft.;
Slope 4 in/100 ft.; Average Depth 36 in.
4. Filter Material: Gravel
Depth of Material 30 in.
5. Distances to:
Well or Suction Line 100+ ft.; Stream 100+ ft.; Pressure Line 20+ ft.; Property Line 20+ ft.

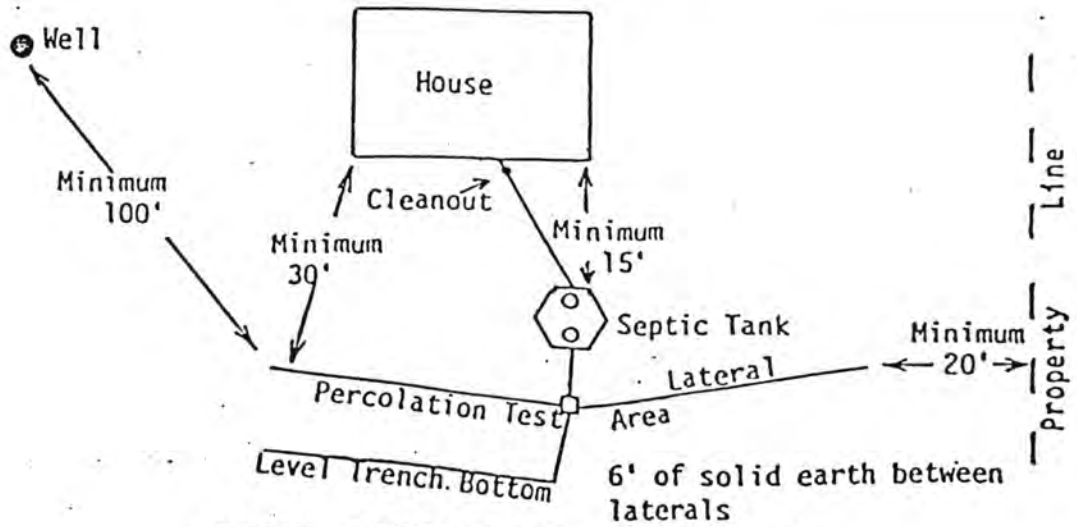


TYPICAL INDIVIDUAL SEWAGE SYSTEM DESIGN