Lincoln-Lancaster County Health Department

ENVIRONMENTAL PUBLIC HEALTH DIVISION

3140 N STREET · LINCOLN, NE 68510-1514

008577

(402) 441-8000

Permit

SEWAGE SYSTEM REPAIR
SEWAGE REPAIR
ALTER SEWER LINE TO OUTBLDG

Establishment

MIKE FULTZ
T9N R6E SEC 21
RIDGEWOOD BLK 6 LOT 5

Permittee

MIKE FULTZ
1900 W FOOTHILLS RD
LINCOLN NE 68522

Permit # 06390084401

Issued 01/12/06
Expires 01/12/07
Revenue Code 3157

FEES: $150.00

TOTAL: $150.00

Bruce D. Dart

Bruce D. Dart, Health Director

EPH COPY

Application to Alter, Extend or Repair an Onsite Wastewater Treatment System

RECEIVED JAN 11 2006

☒ Municipal Code 24.38 ☐ County Resolution Number 02-30

The undersigned hereby applies for a permit to: ☒ **ALTER** ☐ **EXTEND** ☐ **REPAIR** an existing wastewater treatment system, complying with appropriate Ordinance or Resolution, as marked above with drawings attached.

1. **Legal description of property:**
   Township 9N Range 6E 1/4 ____ 1/4 ____ Section 21
   Block 6 Lot 5 Addition RIDGEWOOD
   Parcel ID ____-____-____-____-____ (i.e. 99-99-999-999-999)
   Street Address (no rural route) 1900 West Foothills Rd

2. **Property use:** ☒ residential ☐ commercial ☐ other use
   Number of bedrooms 3 Describe ____

3. **Type of Present Individual Disposal System** ☒ septic system ☐ lagoon ☐ other

4. **Description of proposed alteration, extension or repair** Provide sewer line to outbuilding, for future service

5. **Work to be done by:** ☐ owner ☒ contractor's name Everman Plumbing

6. **Estimated project:** a. Repair, replace, or minor extension with a cost less than $400 (no fee required).
   b. Total cost is greater than $400 (Return fee with this application)
   c. A permit is required if the use, operation, location, or type of system is changed.

Print Name Mike Fultz Address 1900 West Foothills Rd Phone: 423-1678

Applicant Signature (owner or lessee) Work done by Everman Plumbing Douglas Everman

Please include the permit fee ($150) with this application
Fee must be included before the application will be processed. Incomplete information will delay processing

---

HEALTH DEPARTMENT USE ONLY

Date received 1/12/06 REVIEW: ☒ Approved ☐ Disapproved By: Jerrold C. Hood

Site visits
Date 1/11/06 By DS
Date ____/____/____ By ____
Date ____/____/____ By ____

Installation final written approval
Date 1/12/06 By DS

Return application to:
Lincoln-Lancaster County Health Department
Environmental Public Health Division
3140 "N" Street, Lincoln, NE 68510
Phone: 441-8022

Business Office Use Only

Received: Date: 01/12/06 Amount 150 Check No. 6934 Initials ____

White - Division Copy Pink - Business Office Revised 9-05

Lincoln-Lancaster County Health Department
Environmental Health Division
3140 "N" Street • Lincoln, NE 68510-1514
Phone: 402-441-8022

D

Permit Number:

Sewage Disposal System
As Built Plans & Specifications

GPS
N 40° 43.718'
W 096° 44.986'

Date 28 Apr. 1 2010

System Location (Indicate correct number and street)

Address 1900 "W" FOOTHILLS RD (no rural route) City LINCOLN NE, Zip 68523

A. Building Sewer

1. Material: PVC
   Diameter: 4 in.
2. Distance above basement floor: _____ in.
   or distance below basement floor: 40 in.
3. Distance between dwelling and septic tank: 67 ft.
4. Number of clean-outs: _____
5. Distances to: well or suction line OVER 100 ft.
   stream NA ft.
   pressure line NA ft.
   property line OVER 20 ft.

B. Septic Tank

1. Material: CONCRETE
   Number of compartments: 1
2. Capacity: 1250 gal.
3. Factory built: ☐ Yes ☐ No
4. Manholes: Over inlet, diameter _____ in.
   Over outlet, diameter _____ in.
   Riser: ☒ above ☐ below grade 8 in.
5. Inlet: ☒ baffle ☐ tee
6. Outlet: ☒ baffle ☐ tee
7. Depth to top of tank, below unfinished grade: 42 in.
8. Distances to: Well or suction line OVER 100 ft.
   Stream NA ft.
   Pressure line NA ft.
   Property line OVER 20 ft.

C. Distribution Box

1. Material: _____
   Number available outlets: 7
2. Factory built: ☒ Yes ☐ No
3. Distance from septic tank: 70 ft.

D. Absorption Field


(Provide as-built drawings on back of this form)

1. Type: ☐ Half rounds ☐ Perforated pipe
   Diameter of half round: _____
   or perforated pipe: _____
   Material: ☐ fiberglass ☐ plastic ☐ concrete
   ☐ other INFILTRATORS
2. Lateral lines: Number _____
   Length of each line: 75 ft. 125 ft.
   _____ ft. _____ ft. _____ ft.
3. Trench dimensions: Width 6 ft.
   Slope 0 in/100 ft.
   Average depth 24 in
4. Filter material: MASONRY SAND.
   Depth of material 18 in.
5. Distances to: Well or suction line OVER 100 ft.
   Stream NA ft.
   Pressure line NA ft.
   Property line OVER 20 ft.

Complete "As Built" drawing on back of this form.

Scale North (Bh Arrow

Individual Sewage System Design (Example)

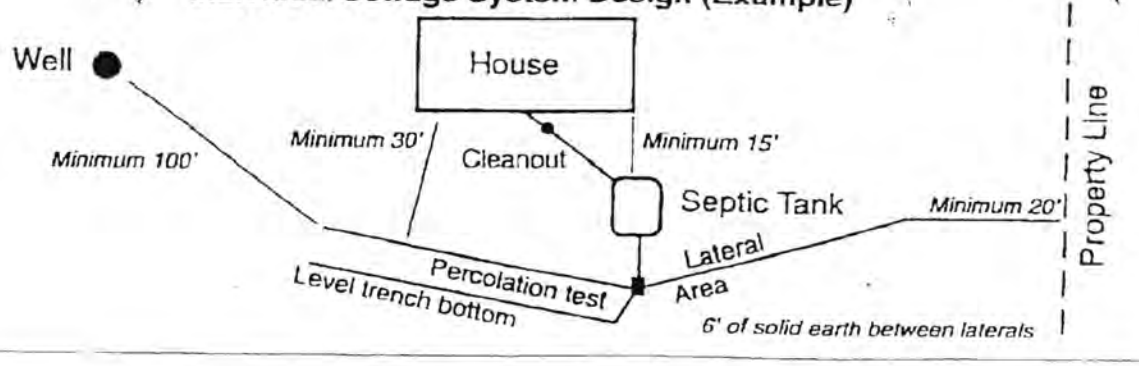

M 23-103 10-96

s Built Drawing

1900 W. Foothills

