LINCOLN-LANCASTER COUNTY HEALTH DEPARTMENT

Division of Environmental Health
2200 St. Marys Ave Lincoln, NE 68502 (402) 471-8000

NON TRANSFERABLE

PERMIT

SEWAGE INSTALLATION

No. 92380081501

Issued 03/31/92
Expires 10/01/92

ESTABLISHMENT

MARK RESSEGUIE
T9N R6E SEC 30
LOT 6
9500 SW 56 STREET

FEES: Permit 018754 $150.00

Total $150.00

PERMITTEE

MARK RESSEGUIE
9500 SW 56 ST
LINCOLN NE 68516

Issued By COUNTY HEALTH

VALID RECEIPT ONLY IF RECEIPTED IN THIS SPACE	
DATE	AMOUNT
4/1/92	PAID

THIS LICENSE OR PERMIT IS ISSUED SUBJECT TO REVOCATION AS PROVIDED BY LAW

FORM 20103-0477
REQUEST FOR SITE CLEARANCE AND PERMIT
FOR INDIVIDUAL SEWAGE DISPOSAL SYSTEM
City Ordinance No. 9150 ☐
County Resolution No. 2832 ☒

LINCOLN-LANCASTER COUNTY HEALTH DEPARTMENT
Division of Environmental Health
2200 St. Marys Avenue
Lincoln, Nebraska 68502
Phone: 471-7800

A

FILING FEE: $ 150.00

FILE NO. _____

DATE: 3/27/91

The undersigned hereby requests SITE CLEARANCE and PERMIT to construct an Individual Sewage Disposal System in conformance with appropriate resolution or ordinance, as described herein:

1. Legal description of property: Twp. 9N ; Range 6E ; Section 30 ; Block _____ : Lot 6 I.T : Addition SEE ATTACHED
   Street Address 9500 SW 56th Street

2. Property Use: Residential ☒ ; Commercial ☐ Other Use ☐
   No. of Bedrooms 3 . Describe 2-Story brick front w/DBL attached garage

3. Type of Individual Sewage Disposal System: Septic Tank ☒ ; Other ☐

4. Distance to public sewer: _____ ft.

Innovative Homes & Designs

Signature of Applicant (Owner or Lessee)

7300 Pranton Circle 483-7060 hm
Address 489-5500 of

(Do not write below this double line)

1. Health Department: Date Rec'd. 3/30/92. Date Frwd. 3/30/92. ACTION: Approved ☒ Disapproved ☐ Signature: Jerrold C. Hood

2. Supt. Bldg. Insp.: or Village Clerk: Date Rec'd. 3/30/92. Date Frwd. 3/30/92. ACTION: Approved ☐ Disapproved ☐ Signature: Dale

3. City or County Engineer: Date Rec'd. 03/30/92. Date Frwd. _____. ACTION: Approved ☒ Disapproved ☐ Signature: [signature]

REMARKS OR REASONS FOR DISAPPROVAL _____

Site Visits:
Date: 9/23/92 by: J.C.H. Road drawing
Date: _____ by: _____
Date: _____ by: _____

INSTALLATION FINAL WRITTEN APPROVAL
Date: 9/25/92 By: Jerrold Hood

White: Health Dept. Copy
Yellow: Engineers Copy
Pink: Bldg. Inspector's Copy

FORM 23-43

FORM 20105-0477
SOIL ABSORPTION TEST DATA REPORT
(Annex to Application)
(Reference: City Ordinance No. 9150 and County Resolution No. 2832)

LINCOLN-LANCASTER COUNTY HEALTH DEPARTMENT
Division of Environmental Health
2200 St. Marys Avenue
Lincoln, Nebraska 68502
Phone: 471-7800

B

FILE NO. _____

PROPERTY WHERE SOIL TESTED:

Location: Township _____; Range _____; Section & ¼ Section _____.
Property Dimensions: _____ ft. x _____ ft. Area: _____ acres. (Attach Sheet C with sketch of property).
Soil Type: Silty Clay ☐ ; Silty Clay Loam ☐ ; Sandy Loam ☐ ; Silt Loam ☐ ; Clay Loam ☒
Dates of Tests: 2-24-92 to 2-25-92. Weather: Precip. None Temp. 60

OWNER: _____

Address: _____

PERCOLATION TEST DATA TABLE

a.	b.	c.	d.	e.	f.	g.	h.	i.	j.	k.	l.	m.	n.
		Pre-Saturation Period				Percolation Readings						Results	
		Start		End		Start			End				
Hold No.	Hole Depth (in.)	Date (Mo./ Day)	Time (Hr./ Min.)	Date (Mo./ Day)	Time (Hr./ Min.)	Date (Mo./ Day)	Time (Hr./ Min.)	Water Level (in.)	Time (Hr./ Day)	Water Level (in.)	Elapsed Time (Min.)	Water Level Drop (in.)	Percolation Rates (Min./in.)
1	36"	2/24	16/30	2/24	19/20	2/25	11/30	6	12	4 3/4	30	1 1/4	
2	36"	2/24	16/32	"	19/22	"	11/35	6	12/05	4 3/4	30	1 1/4	
3	36"	2/24	16/34	"	19/24	"	11/40	6	12/10	4 5/8	30	1 3/8	
4	36"	2/24	16/36	"	19/26	"	11/45	6	12/15	4 3/4	30	1 1/4	
5	36"	2/24	16/38	"	19/28	"	11/50	6	12/20	4 3/4	30	1 1/4	
6	36"	2/24	16/40	"	19/30	"	11/55	6	12/25	4 3/4	30	1 1/4	

Sum of Percolation Rates: _____
Average of Rates: _____
Mean of Rates: _____

Signature of Person Conducting Test

Address Box 181 Elmwood, NE Phone 994-2225

(Do not write below this line)

REVIEWING ACTION

Remarks: _____
Soil Type (SCS): Wymore Silty Clay Loam
Date: March 30, 1992

Approved Percolation Rate (a)
A. 24 min./inch
B. _____ min./inch
C. _____ min./inch

Jerrold C. Hood
Signature of Reviewing Official

FORM 20104-0477
PLANS & SPECIFICATIONS FOR SEWAGE DISPOSAL SYSTEM (Annex to Application)
City Ordinance No. 9150 ☐
County Resolution No. 2832 ☐

LINCOLN-LANCASTER COUNTY HEALTH DEPARTMENT
Division of Environmental Health
2200 St. Marys Avenue
Lincoln, Nebraska 68502
Phone: 471-7800

D

DATE: 9-24-92

FILE NO: _____


SPECIFICATIONS AS BUILT

A. BUILDING SEWER:
1. Material PVC ; Diameter 4 in.
2. Distance above basement floor ____ in., or below basement floor 40 in.
3. Distance between dwelling and septic tank 146 ft.
4. Number of clean-outs 1 .
5. Distances to:
Well or Suction Line 100+ ft.; Stream 100+ ft.; Pressure Line 100+ ft.; Property Line 100+ ft.

B. SEPTIC TANK:
1. Material Concrete ; No. of compartments 1 .
2. Capacity 1000 gals.;
3. Factory Built: Yes ☒ No ☐
(Company American Concrete)
4. Manholes: Over Inlet; diam. ____ in.
Over Outlet; diam. ____ in.
Riser Above ☐ Below ☐ Grade ____ in.
5. Inlet: Baffle ☒ ; or Tee ☐
6. Outlet: Baffle ☒ ; or Tee ☐
7. Depth of top of tank below finished grade 18 in.
8. Distances to:
Well or Suction Line 100+ ft.; Stream 100+ ft.; Pressure Line 100+ ft.; Property Line 100+ ft.

C. DISTRIBUTION BOX:
1. Material Concrete ; Number available outlets 5 .
2. Factory Built: Yes ☒ No ☐
(Company American Concrete)
3. Distance from Septic Tank 7 ft.

D. ABSORPTION FIELD: (Provide as built drawings on back of this form)
1. Type: Half Rounds ☐ Perforated Pipe ☐
Diameter of Half Round 22" or Perforated Pipe ____.
Material: fiberglass ☐ ;plastic ☐ ; concrete ☒ ; other ____.
2. Lateral Lines:
Number 2 ;Length of each line 88 , 80 , ____ , ____ , ____ ft.;
Total length of laterals 168 ft.;
Distance between lateral lines 10 ft.
3. Trench dimensions: Width 4 ft.; Slope 2 in/100 ft.; Average Depth 36 in.
4. Filter Material: Gravel
Depth of Material 24 in.
5. Distances to:
Well or Suction Line 100+ ft.; Stream 100+ ft.; Pressure Line 100+ ft.; Property Line 100+ ft.

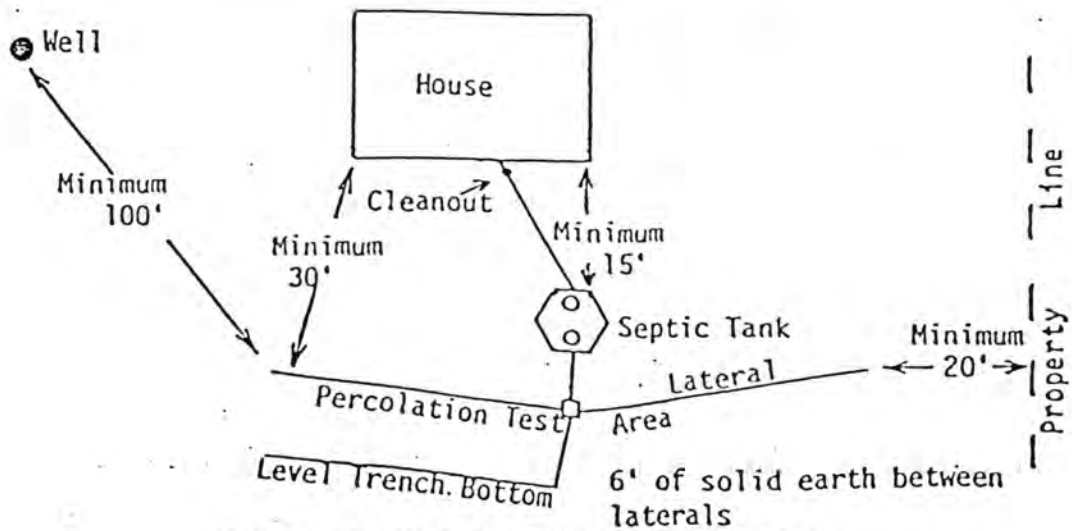

TYPICAL INDIVIDUAL SEWAGE SYSTEM DESIGN

Wiederspan/Rank

A TRACT OF LAND IN THE WEST-ONE HALF OF THE SOUTHWEST QUARTER OF SECTION 30, TOWNSHIP 9 NORTH, RANGE 6 EAST OF THE 6TH P.M. LANCASTER COUNTY, NEBRASKA, MORE PARTICULARLY DESCRIBED AS FOLLOWS: REFERRING TO THE NORTHEAST CORNER OF THE WEST ONE-HALF OF THE SOUTHWEST QUARTER OF SECTION 30, TOWNSHIP 9 NORTH, RANGE 6 EAST OF THE 6TH P.M., LANCASTER COUNTY, NEBRASKA; THENCE IN A SOUTHERLY DIRECTION ON THE EAST LINE OF THE WEST ONE-HALF OF THE SOUTHWEST QUARTER OF SAID SECTION 30 ON AN ASSUMED BEARING OF SOUTH 00 DEGREES 02 MINUTES 53 SECONDS WEST A DISTANCE OF 697.00 FEET TO THE POINT OF BEGINNING. THENCE CONTINUING IN A SOUTHERLY DIRECTION ON THE LAST DESCRIBED COURSE A DISTANCE OF 759.71 FEET. THENCE IN A WESTERLY DIRECTION ON A BEARING OF SOUTH 89 DEGREES 43 MINUTES 31 SECONDS WEST ON A LINE PARALLEL TO THE NORTH LINE OF THE WEST ONE-HALF OF THE SOUTHWEST QUARTER OF SAID SECTION 30 A DISTANCE OF 862.25 FEET. THENCE IN A NORTHERLY DIRECTION ON A BEARING OF NORTH 00 DEGREES 00 MINUTES 22 SECONDS EAST ON LINE PARALLEL TO THE WEST LINE OF THE WEST ONE-HALF OF THE SOUTHWEST QUARTER OF SAID SECTION 30 A DISTANCE OF 201.00 FEET. THENCE IN A WESTERLY DIRECTION ON A BEARING OF SOUTH 89 DEGREES 43 MINUTES 31 SECONDS WEST ON A LINE PARALLEL TO THE NORTH LINE OF THE WEST ONE-HALF OF THE SOUTHWEST QUARTER OF SAID SECTION 30 A DISTANCE OF 420.00 FEET TO A POINT ON THE WEST LINE OF THE WEST ONE-HALF OF THE SOUTHWEST QUARTER OF SAID SECTION 30. THENCE IN A NORTHERLY DIRECTION ON THE WEST LINE OF THE WEST ONE-HALF OF THE SOUTHWEST QUARTER OF SAID SECTION 30 ON A BEARING OF NORTH 00 DEGREES 00 MINUTES 22 SECONDS EAST A DISTANCE OF 558.70 FEET. THENCE IN AN EASTERLY DIRECTION ON A LINE PARALLEL WITH THE NORTH LINE OF THE WEST ONE-HALF OF THE SOUTHWEST QUARTER OF SAID SECTION 30 ON A BEARING OF NORTH 89 DEGREES 43 MINUTES 31 SECONDS A EAST DISTANCE OF 1282.81 FEET TO THE POINT OF BEGINNING.

Installed By Vogt T&T Excavating
9-23-92

Innovative Homes
9444 SW 56th

