Lincoln-Lancaster County Health Department

ENVIRONMENTAL HEALTH DIVISION

3140 N STREET · LINCOLN, NE 68510-1514 (402) 441-8000

Permit

SEWAGE SYSTEM REPAIR
SEWER REPAIR-EXTEND LATERAL

Permit # 99390063001

Issued 08/17/99
Expires 02/17/00
Revenue Code 3157

Establishment

ROBERT E COVOLIK
T9N R7E SEC 28
YANKEE RIDGE 2ND ADD BLK 2 LOT 4
8800 S 68 ST

FEES: $50.00

TOTAL: $50.00

Permitee

ROBERT E COVOLIK
8800 S 68 ST
LINCOLN NE 68516

Leon F. Vinci, MPH, Health Director

• POST IN A PROMINENT PLACE • NOT TRANSFERABLE

010860

Individual Sewage Disposal System
Application to Alter, Extend or Repair

☒ Municipal Code 24.38 ☐ County Resolution Number 2832

Date:	File No.:

The undersigned hereby applies for a permit to: ☐ **ALTER** ☑ **EXTEND** ☐ **REPAIR** an existing Individual Sewage Disposal System, in conformance with appropriate Ordinance or Resolution, as described in this application and drawings attached hereto.

1. **Legal description of property:**
   Township 9N Range 7E Section 28 1/4 Section ____
   Block 2 Lot 4 Addition Yankee Ridge 2nd Edition
   Street Address 8900 So 68th

2. **Property use:** ☑ residential ☐ commercial ☐ other use
   Number of bedrooms ____ Describe ____

3. **Type of Present Individual Disposal System:** ☑ septic tank ☐ lagoon ☐ other

4. **Description of proposed alteration, extension or repair:** ADD 150 LF OF LATERAL

5. **Work to be done by:** ☐ owner ☑ contractor's name DIRT WORKS PLUS INC

6. **Estimated project:** a. Repair, replace or minor extension with a cost of less than $400.00 (no fee required).
   b. Total cost is greater than $400.00 (Return fee with this application).
   c. A "construction permit" is required if the use, operation, location, or type of the system is being changed.

Print Name Robert E Covalik Address 8900 S. 68th Phone 420 2783
Applicant Signature (owner or lessee) Robert E Covalik

Please include the permit fee ($50.00) with this application

(Please do not write below this line)

Date rec'd 8/16/99 REVIEW: ☒ approved ☐ disapproved By: Gerrold C. Hood

Site visits:
Date 8-27-99 By [illegible]
Date ____ By ____
Date ____ By ____

Installation final written approval
Date 9-13-99 By [illegible]

Return to: Lincoln-Lancaster County Health Department - Environmental Health Division
3140 "N" Street, Lincoln, NE. 68510
441-8022

Rec'd 8/16/99 cc #2315 $50 cc

White - EH Pink - Business Office Revised 1/98

SEP 7 1999

D

Permit Number:

Lincoln-Lancaster County Health Department
Environmental Health Division
3140 "N" Street • Lincoln, NE 68510-1514
Phone: 402-441-8022

Sewage Disposal System

As Built Plans & Specifications

Date 8-27-99 Septic addition

System Location (Indicate correct number and street)

Address 8800 So. 68th (no rural route) City Lincoln NE, Zip

A. Building Sewer

1. Material: Schedule 160 Plastic
   Diameter: 4" in.
2. Distance above basement floor: _____ in.
   or distance below basement floor: _____ in.
3. Distance between dwelling and septic tank: _____ ft.
4. Number of clean-outs: _____
5. Distances to: well or suction line _____ ft.
   stream _____ ft.
   pressure line _____ ft.
   property line _____ ft.

B. Septic Tank

1. Material: _____
   Number of compartments: _____
2. Capacity: _____ gal.
3. Factory built: ☐ Yes ☐ No
4. Manholes: Over inlet, diameter _____ in.
   Over outlet, diameter _____ in.
   Riser: ☐ above ☐ below grade _____ in.
5. Inlet: ☐ baffle ☐ tee
6. Outlet: ☐ baffle ☐ tee
7. Depth to top of tank, below unfinished grade: _____ in.
8. Distances to: Well or suction line _____ ft.
   Stream _____ ft.
   Pressure line _____ ft.
   Property line _____ ft.

C. Distribution Box

1. Material: Concrete
   Number available outlets: 5
2. Factory built: ☑ Yes ☐ No
3. Distance from septic tank: 2 ft.

D. Absorption Field


(Provide as-built drawings on back of this form)

1. Type: ☑ Half rounds ☐ Perforated pipe
   Diameter of half round: Infiltrates on ground
   or perforated pipe: _____
   Material: ☐ fiberglass ☑ plastic ☐ concrete
   ☐ other _____
2. Lateral lines: Number 1 addition
   Length of each line: 125' ft. _____ ft.
   _____ ft. _____ ft., _____ ft.
3. Trench dimensions: Width 1' ft.
   Slope 0 in/100 ft.
   Average depth 3 42 in
4. Filter material: gravel
   Depth of material 16 in.
5. Distances to: Well or suction line NA ft.
   Stream NA ft.
   Pressure line 50' ft.
   Property line 20 ft.

Complete "As Built" drawing on back of this form.

Indicate North with Arrow


Individual Sewage System Design (Example)

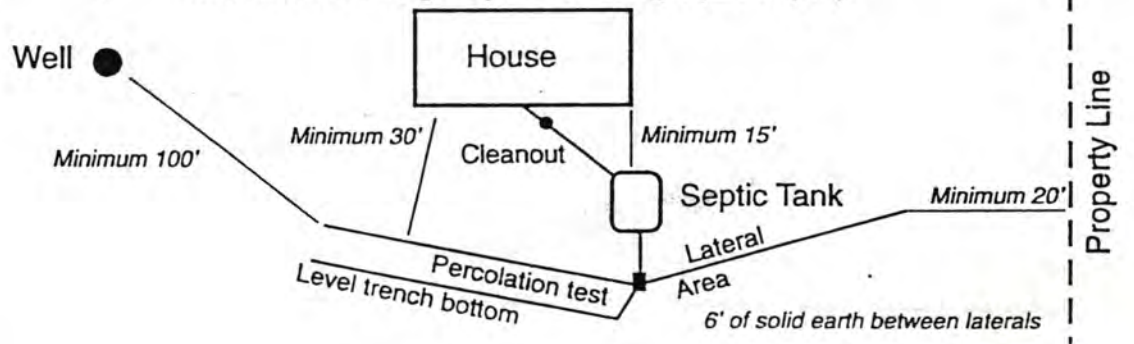

FORM 23-103 10-96

- - - Existing Laterals

As Built Drawing

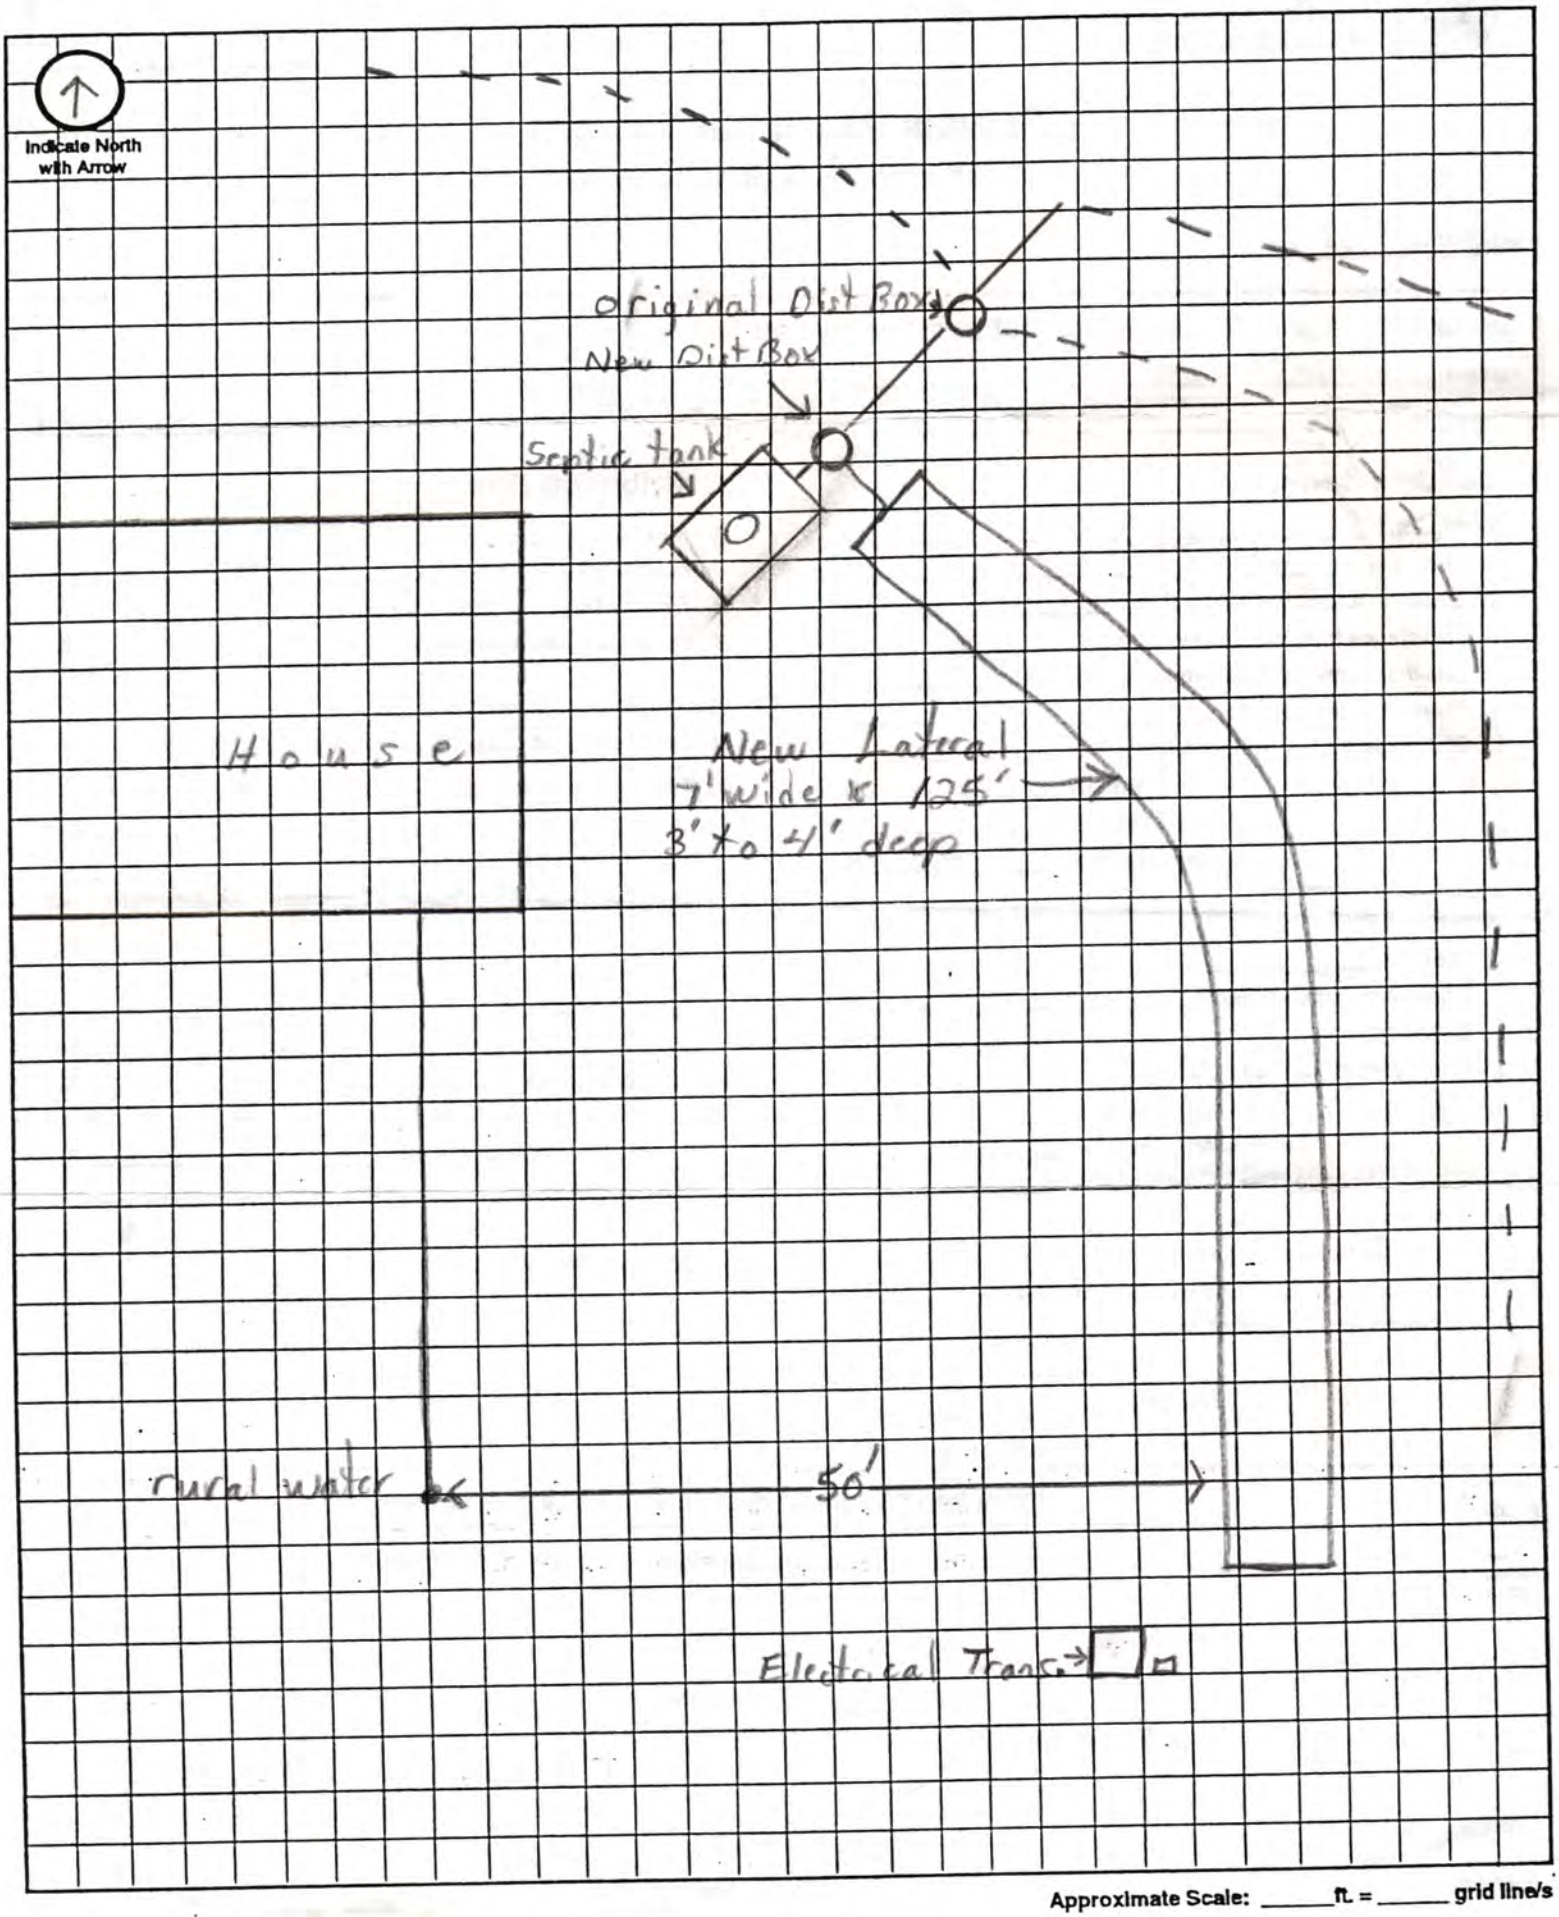

Approximate Scale: _____ ft. = _____ grid line/s