Lincoln-Lancaster County Health Department

ENVIRONMENTAL PUBLIC HEALTH DIVISION

3140 N STREET · LINCOLN, NE 68510-1514

009070

(402) 441-8000

Permit

SEWAGE INSTALLATION
OTHER SEWAGE DISPOSAL SYSTEM

Permit # 06380321401

Issued 07/03/06
Expires 07/03/07
Revenue Code 3157

Establishment

KINGERY CONSTRUCTION
T9N R7E SEC 29 QTR SW
LOT 40
9300 S 40 ST

FEES: $275.00

Permittee

KINGERY CONSTRUCTION
201 N 46 ST
LINCOLN NE 68503

TOTAL: $275.00

Bruce D. Dart

Bruce D. Dart, Health Director

EPH COPY

Lincoln-Lancaster County Health Department
Environmental Health Division
3140 "N" Street • Lincoln, NE 68510-1514
Phone: 402-441-8022

A

Permit Number: 06380321401

Sewage Disposal System

Request for Site Clearance and Permit

Include Form B, Form C and Applicable Fees with this Application.

☐ Septic System ☐ Lagoon ☒ Other (Refer to Form C)

The undersigned hereby requests site clearance and permit to construct a Sewage Disposal System in conformance with appropriate resolution or ordinance, as described herein:

PLEASE PRINT OR TYPE

A. System Location (Indicate correct number and street)

Address 9300 South 40th Street (no rural route) City Lincoln NE, Zip 68516

Legal Description LOT 40 SW 29-9-7
1/4 1/4 Section Township Range Subdivision Addition Block Lot

Geographical Location (if known): Longitude _____ Latitude _____

☐ Check if system mail address is not the same as the owner's address

B. Owner

Name _____ Signature _____

Address _____ City/State/Zip _____

☐ Check if owner designed system Home Phone _____ Work Phone _____

C. Contractor

Name _____ Company Name Kingery Construction

Address _____ City/State/Zip _____

☐ Check if contractor designed system Work Phone _____

D. Engineer/Installer ☒ Check and complete if engineer designed system

Designer Name Dan Rosenthal Firm REGA Eng Group Work Phone 484-7342

E. This System Will Serve a

☐ Residential Dwelling Number of Bedrooms ____ Is there a Whirlpool Bathtub YES NO

☒ Commercial Establishment/Other Facility Specify Church, Temporary INSTALLATION.

Design flow in gallons per day _____ Type of Wastewater: ☒ Domestic ☐ Non-Domestic.

DO NOT WRITE BELOW THIS LINE

Approval Process ☒ Municipal Code 24.38 ☐ County Resolution No. 2832

1. **Health Department** Date rec'd 7/3/06 Date frwd 7/3/06 ACTION ☒ Approved ☐ Disapproved Signature Jerrold E. Hood
2. **Supt. Bldg. Insp. or Village Clerk** Date rec'd _____ Date frwd _____ ACTION ☐ Approved ☐ Disapproved Signature _____
3. **City or County Engineer** Date rec'd _____ Date frwd _____ ACTION ☐ Approved ☐ Disapproved Signature _____


Installation Final Written Approval


By _____

Date _____


Business Office Use Only
Date Rec'd 7/3/06
Amt Paid $275.00
Rec'd By CW Cash/Check No. 7035

FORM 23-100 10-96 White - Health Dept. Yellow - Engineer Pink - Bldg. Inspector

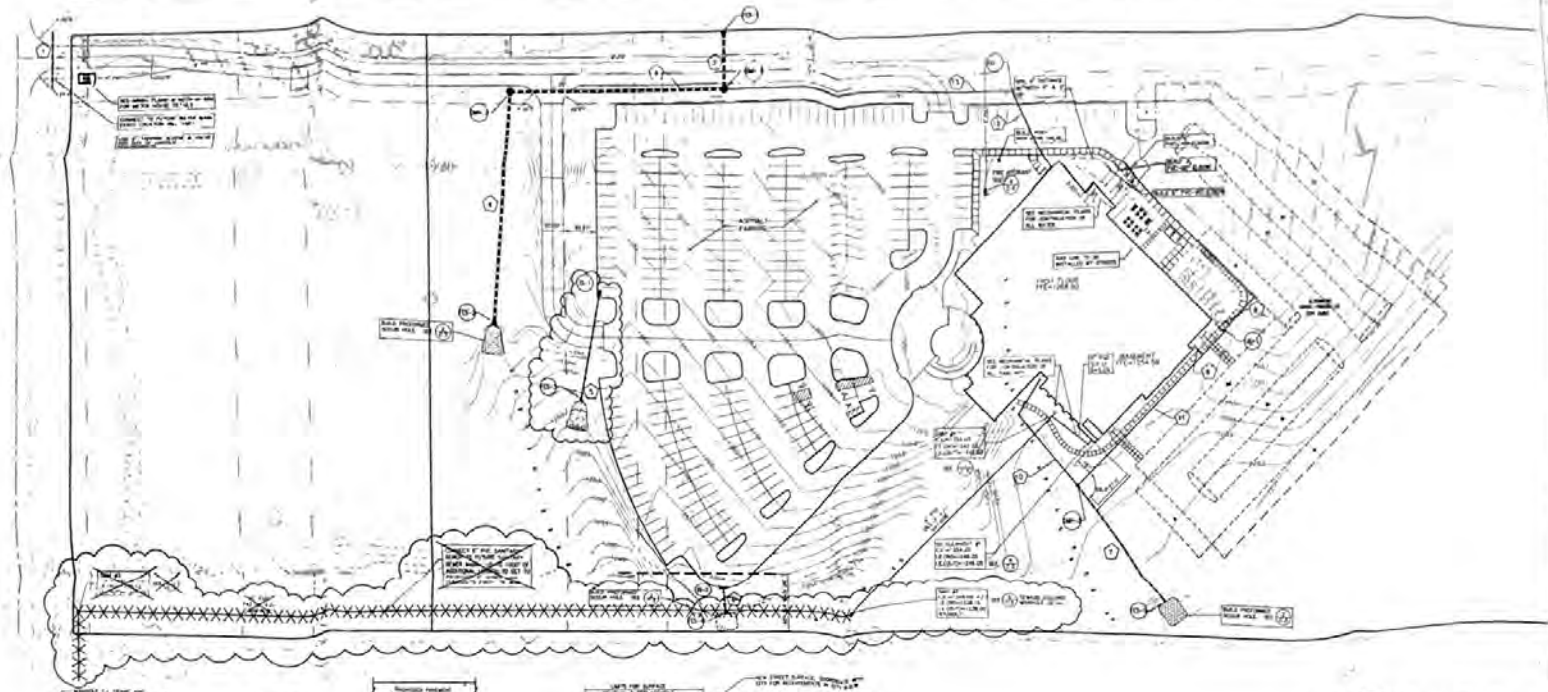




STANDARD MANHOLE
NO SCALE




ABS PVC OR SDR24 (SOLID WALL)

BENEATH PAVEMENT MAIN LINES/SERVICE LINES

PIPE ENVELOPE – SANITARY
NO SCALE




PIPE ENVELOPE – WATER
NO SCALE

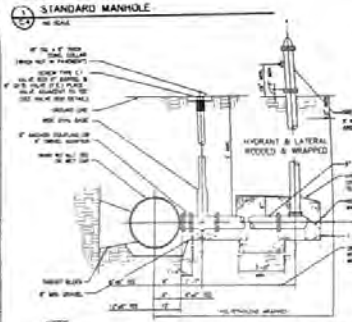

HYDRANT & LATERAL WRAPPED & WRAPPED

FIRE HYDRANT DETAIL
NO SCALE

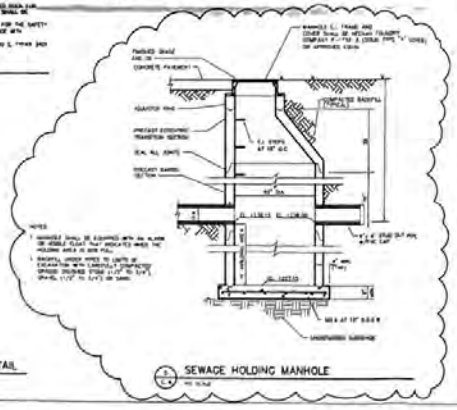

SEWAGE HOLDING MANHOLE
NO SCALE

NOTE: ALL CROSSED OUT ITEMS SHOWN ON PLAN TO BE BUILT AT A FUTURE TIME

STRUCTURES SCHEDULE

#	TYPE	SIZE (IN)	I.E.	I.L.	COMMENTS AND REFERENCES
D-1	CURB INLET	—	1258.75	N. (IN) = 1257.92 N. (OUT) = 1256.66	BUILD TYPE "A" CRATE INLET AS PER THE CITY OF LINCOLN STANDARD PLAN NO. 5.3.1 WITH 1.00' GRATE ELEVATION 0.17 FOR TOP OF GRATE AT GUTTER LINE
D1-1	CURB INLET	—	1258.72	E. (OUT) = 1249.47	BUILD CURB INLET PER TYPE R-1 AS PER THE CITY OF LINCOLN STANDARD PLAN NO. 5.3.1 WITH 1.00' GRATE ELEVATION 0.17 FOR TOP OF GRATE AT INLET CENTER
FES-1	RCP FLARED END SECTION	30"	—	FL = 1257.55	BUILD 30" RCP FLARED END SECTION AS PER THE CITY OF LINCOLN STANDARD PLANS.
FES-2	RCP FLARED END SECTION	30"	—	FL = 1256.04	BUILD 30" RCP FLARED END SECTION AS PER THE CITY OF LINCOLN STANDARD PLANS.
FES-3	RCP FLARED END SECTION	15"	—	FL = 1256.50 FL = 1255.99	BUILD 15" RCP FLARED END SECTION AT THE CITY OF LINCOLN STANDARD PLANS.
FES-4	RCP FLARED END SECTION	18"	—	FL = 1247.66	BUILD 18" RCP FLARED END SECTION AS PER THE CITY OF LINCOLN STANDARD PLANS.
FES-5	RCP FLARED END SECTION	18"	—	FL = 1248.09	BUILD 18" RCP FLARED END SECTION AS PER THE CITY OF LINCOLN STANDARD PLANS.
SMH-1	MANHOLE	84" DIA	1270.50	E. (IN) = 1257.79 E. (OUT) = 1249.29 1257.54	BUILD STORM SEWER MANHOLE (SEE 4/C4)
SMH-2	MANHOLE	84" DIA	1257.70	E. (IN) = 1250.79 S. (OUT) = 1249.29 1254.46	BUILD STORM SEWER MANHOLE (SEE 4/C4)
SMH-3	MANHOLE	—	1253.66 1249.29	E. (IN) = 1249.40 E. (OUT) = 1249.40	BUILD STORM SEWER MANHOLE (SEE 4/C4)
A-1	AREA INLET	24"	1254.69	E. (OUT) = 1250.09	BUILD STORM SEWER CLEANOUT (SEE 2/C4)
CO-1	CLEAN OUT	—	1259.53	E. (OUT) = 1253.13	BUILD STORM SEWER CLEANOUT (SEE 2/C4)

PIPE SCHEDULE

#	TYPE	SIZE (IN)	LENGTH (LF)	SLOPE (%)
1	RCP	12	104	2.08
2	RCP	15	52	0.72
3	RCP	18	90	0.69
4	RCP	30	4.5	0.69
5	RCP	12	58	0.69
6	RCP	18	68	0.69
7	RCP	15	65	0.77
8	RCP	15	126	1.00
9	RCP	18	5	1.00
10	RCP	18	5	1.00
11	RCP	18	5	1.00
12	RCP	18	124	0.50
13	RCP	18	5	0.50
14	RCP	18	85	0.50
15	RCP	18	5	0.50

ISSUED FOR	DATE	BY
SHEET REVISIONS	06/27/06	SHB

SINCLAIR hille

Southwood Lutheran Church
Site Utility Plan

C4