LINCOLN-LANCASTER COUNTY HEALTH DEPARTMENT

FILE NO. 1767-C

INDIVIDUAL SEWAGE SYSTEM CONSTRUCTION — TYPE OF PERMIT

October 8, 1981 — THIS PERMIT EXPIRES

Norman F. Bulling by Donald W. Fertig, 400 Lincoln Benefit Building — ISSUED TO / ADDRESS

T12N, R6E, Section 11, Lot 3Irregular Tract — LEGAL DESCRIPTION

REMARKS: NON-TRANSFERABLE ALTERATION

PERMIT	INSPECTION FEE	OCCUPATION TAX	TOTAL
$ 30.00	$	$	$ 30.00
ACCOUNTING NO.	ACCOUNTING NO.	ACCOUNTING NO.	CODE
	110.16	148.14	6-2

RECEIPTED BY — DATE — AMOUNT

VALID RECEIPT ONLY IF RECEIPTED IN THIS SPACE

HEALTH — ISSUING OFFICER

2832

THIS PERMIT IS ISSUED AS PROVIDED BY COUNTY RESOLUTION NO. _____

20109-0977

FORM HD-41(73) APPLICATION FOR PERMIT TO ALTER, EXTEND OR REPAIR INDIVIDUAL SEWAGE DISPOSAL SYSTEM

City Ordinance No. 9150 [ ]
County Resolution No. 2832 [XX]

LINCOLN-LANCASTER COUNTY HEALTH DEPARTMENT
Division of Environmental Health
2200 St. Marys Ave.
Lincoln, Nebraska 68502 (Phone: 475-6221)

FILE NO. 1747-C

TO: Division of Environmental Health
Lincoln-Lancaster County Health Dept.

DATE: April 7, 1981

The undersigned hereby applies for a permit to ALTER [XX], EXTEND [ ], or REPAIR [ ] an existing Individual Sewage Disposal System, in conformance with appropriate Ordinance or Resolution, as described in this application and drawings attached hereto.

1. Legal description of property: Twp. 12N ; Range 6E ; Section 11 ; Block ; Lot 3I.T. ; Addition
Street Address Rural Farm, Lancaster County

2. Property Use: Residential [ ]; Commercial [ ]
No. Bedrooms ; Describe
Other Use [XX]
Describe working farm with tenants occupying residence on farm.

3. Type of existing Individual Sewage Disposal System: Septic Tank [ ]; Other [XX]

4. Description of proposed alteration, extension or repair: installation of septic tank and laterals.

5. Work to be done by: Owner [XX] ; ~~or~~ Contractor [XX] , Voboril Plumbing, 215 West 1st, Wahoo, NE
Contractor's Name

6. Estimated cost of project:

a. Materials	$
b. Labor	$
c. Other	$
TOTAL	$ in excess of $400

Donald W. Fertig
Norman F. Bulling, Owner, by his Attorney, Donald W. Fertig
Signature of Applicant (owner or lessee)
Attorney - 400 Lincoln Benefit Building
Lincoln, Nebraska 68508/Owner - RFD, Ceresco, NE 68017
Address

(Do not write below this line)

REVIEWING ACTION

1. Date Rec'd:
Filing Fee: $ 30.00

2. Site Visits:
Date: 9-10-81 by:
Date: by:
Date: by:

3. Date: Approved [X]; Disapproved [ ]
by: Jerrold C. Hood

4. INSTALLATION FINAL WRITTEN APPROVAL
Date: 9-10-81 by:

FORM 20104-0477
PLANS & SPECIFICATIONS FOR SEWAGE DISPOSAL SYSTEM (Annex to Application)
City Ordinance No. 9150 ☐
County Resolution No. 2832 ☐

LINCOLN-LANCASTER COUNTY HEALTH DEPARTMENT
Division of Environmental Health
2200 St. Marys Avenue
Lincoln, Nebraska 68502
Phone: 474-1541

D

DATE: _____

FILE NO. _____


SPECIFICATIONS AS BUILT

A. BUILDING SEWER:
1. Material PVC ; Diameter 4" in.
2. Distance above basement floor _____ in., or below basement floor _____ in.
3. Distance between dwelling and septic tank _____ ft.
4. Number of clean-outs _____.
5. Distances to:
Well or Suction Line _____ ft.; Stream _____ ft.; Pressure Line _____ ft.; Property Line _____ ft.

B. SEPTIC TANK:
1. Material Fiberglass; No. of compartments _____.
2. Capacity _____ gals.;
3. Factory Built: Yes ☒ No ☐
(Company Ocroglass)
4. Manholes: Over Inlet; diam. _____ in.
Over Outlet; diam. _____ in.
Riser Above ☐ Below ☐ Grade _____ in.
5. Inlet: Baffle ☐ ; or Tee ☐
6. Outlet: Baffle ☐ ; or Tee ☐
7. Depth of top of tank below finished grade _____ in.
8. Distances to:
Well or Suction Line _____ ft.; Stream _____ ft.; Pressure Line _____ ft.; Property Line _____ ft.

C. DISTRIBUTION BOX:
1. Material Plastic ; Number - available outlets _____.
2. Factory Built: Yes ☒ No ☐
(Company _____)
3. Distance from Septic Tank 5' ft.

D. ABSORPTION FIELD: (Provide as built drawings on back of this form)
1. Type: Half Rounds ☐ Perforated Pipe ☒
Diameter of Half Round _____ or Perforated Pipe _____.
Material: fiberglass ☐ ; plastic ☒ ; concrete ☐ ; other _____.
2. Lateral Lines:
Number 2 ; Length of each line 80', 20', _____, _____, _____ ft.;
Total length of laterals _____ ft.;
Distance between lateral lines _____ ft.
3. Trench dimensions: Width 3' ft.;
Slope 2" in/100 ft.; Average Depth 34" in.
4. Filter Material: Road gravel
Depth of Material 16" in.
5. Distances to:
Well or Suction Line _____ ft.; Stream _____ ft.; Pressure Line _____ ft.; Property Line _____ ft.

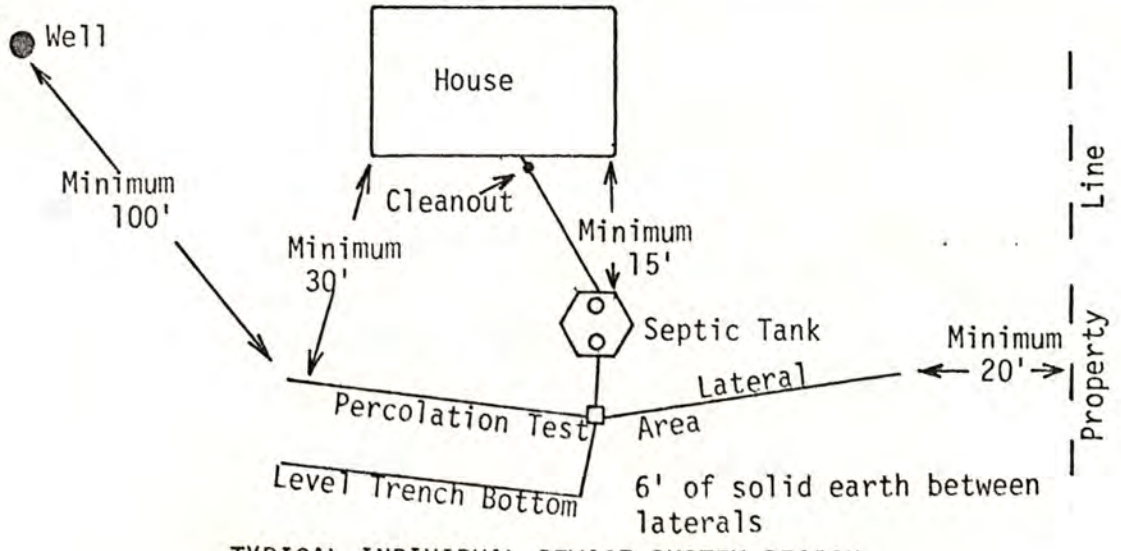

TYPICAL INDIVIDUAL SEWAGE SYSTEM DESIGN

Agnew Rd.

AS BUILT DRAWING OF SYSTEM

DATE _____ INSTALLER Larry Schwarck for Patty Co. Plbg.

