LINCOLN-LANCASTER COUNTY HEALTH DEPARTMENT

ENVIRONMENTAL HEALTH DIVISION

2200 St. Marys Ave Lincoln, NE 68502-3785 (402) 441-8000

NON TRANSFERABLE

PERMIT

Permit
SEWAGE SYSTEM REPAIR

No. 93390035401

Issued 11/05/93
Expires 05/05/94
Revenue Code 18754

Establishment
LOREN KUZELKA
T10N R6E SEC 10
4201 N 1 STREET

FEES: $50.00

TOTAL $50.00

Permittee
LOREN KUZELKA
4201 N 1 ST
LINCOLN NE 68521

Issued By M. Jane Ford
Health Director

THIS LICENSE OR PERMIT IS ISSUED SUBJECT TO REVOCATION AS PROVIDED BY LAW
"POST IN A PROMINENT PLACE"

FORM HD-41(73) APPLICATION FOR PERMIT TO ALTER, EXTEND OR REPAIR INDIVIDUAL SEWAGE DISPOSAL SYSTEM

City Ordinance No. 9150 [X]
County Resolution No. 2832 [ ]

LINCOLN-LANCASTER COUNTY HEALTH DEPARTMENT
Division of Environmental Health
2200 St. Marys Ave.
Lincoln, Nebraska 68502 (Phone: 471-7800)

FILE NO._____

TO: Division of Environmental Health
Lincoln-Lancaster County Health Dept.

DATE: 11-4-93

The undersigned hereby applies for a permit to ALTER [ ], EXTEND [X], or REPAIR [ ] an existing Individual Sewage Disposal System, in conformance with appropriate Ordinance or Resolution, as described in this application and drawings attached hereto.

1. Legal description of property: Twp. 10N ; Range 6E ; Section 10 ;
Block_____; Lot_____; Addition_____
Street Address 4201 N. 1st St.

2. Property Use: Residential_____ [X]; Commercial_____ [ ]
No. Bedrooms 3
Describe_____
Other Use [ ]
Describe_____

3. Type of existing Individual Sewage Disposal System: Septic Tank [X]; Other [ ]

4. Description of proposed alteration, extension or repair: add 43' sewer line new Boot 100' x 3' wide new perforated lateral

5. Work to be done by: Owner [ ] ; or Contractor [ ], Smith & Son Co.
Contractor's Name

6. Estimated cost of project:

a. Materials	$	
b. Labor	$	
c. Other	$	
TOTAL	$	1390 est

Loren Kuzelka
Loren Kuzelka
Signature of Applicant (owner or lessee)

4201 No 1st
Address

(Do not write below this line)

REVIEWING ACTION

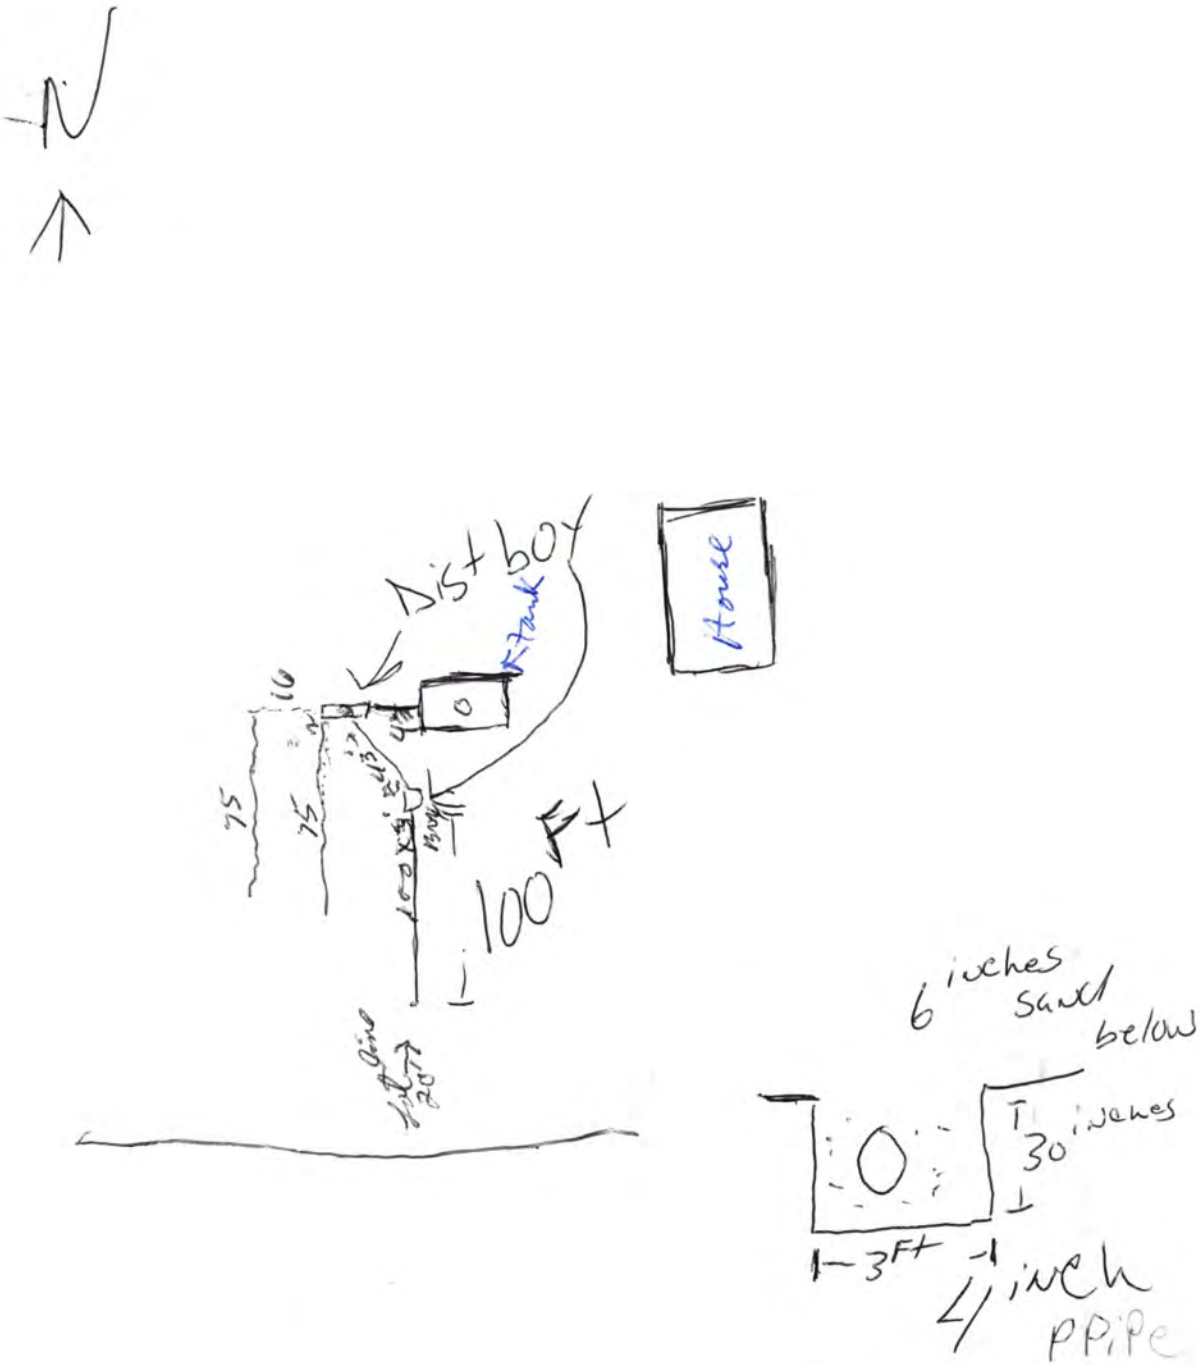
1. Date Rec'd: 11-4-93
Filing Fee: $ 50.00

2. Site Visits:
Date: 11-4-93 by: RM
Date:_____ by:_____
Date:_____ by:_____

3. Date: Approved [X]; Disapproved [ ]
by: Lon Moravat
PROVISIONAL *

4. INSTALLATION ~~FINAL~~ WRITTEN APPROVAL
Date: 11-4-93 by: Lon Moravat

* Extra 100 ft of soil surface lateral would be a better way to extend the life of the septic system.


N
Dist box
Tank
House
10
75
75
100 Ft
6 inches sand below
30 inches
3Ft
4 inch PPipe