LINCOLN-LANCASTER COUNTY HEALTH DEPARTMENT

3140 "N" STREET
NON TRANSFERABLE

ENVIRONMENTAL HEALTH DIVISION
Lincoln, NE 68510-1514

(402) 441-8000

PERMIT

Permit
SEWAGE INSTALLATION
LAGOON

No. 98380171801

Issued 02/05/98
Expires 08/05/98
Revenue Code 3157

Establishment
WARREN ASHEY
T11N R6E SEC 7 QTR SW
LOT 18
5000 W WAVERLY RD--RAYMOND

FEES: $150.00

Permittee
WARREN ASHEY
4200 BINGHAM LN
LINCOLN NE 68516-2946

TOTAL $150.00

Gregg Wright MO
Issued By ~~M. Jane Ford~~
Health Director

5954

THIS LICENSE OR PERMIT IS ISSUED SUBJECT TO REVOCATION AS PROVIDED BY LAW "POST IN A PROMINENT PLACE"

Lincoln-Lancaster County Health Department
Environmental Health Division
3140 "N" Street • Lincoln, NE 68510-1514
Phone: 402-441-8022

A

Permit Number: 983801718

Sewage Disposal System

Request for Site Clearance and Permit

Include Form B, Form C and Applicable Fees with this Application.

☐ Septic System ☑ Lagoon ☐ Other (Refer to Form C)

The undersigned hereby requests site clearance and permit to construct a Sewage Disposal System in conformance with appropriate resolution or ordinance, as described herein:

PLEASE PRINT OR TYPE

A. System Location (Indicate correct number and street)

Address 5000 W WAVERLY RD (no rural route) City _____ NE, Zip _____

Legal Description SW 7 11 6 OHE of the 6TH PM 31 IT 78
1/4 | 1/4 | Section | Township | Range | Subdivision | Addition | Block | Lot

Geographical Location (if known): Longitude _____ Latitude _____

☑ Check if system mail address is not the same as the owner's address

B. Owner

Name WARREN ASHEY Signature Warren J Ashey

Address 4200 BINGHAM LANE City/State/Zip LINCOLN, NEBRASKA 68516

☐ Check if owner designed system Home Phone _____ Work Phone 475-2611

C. Contractor

Name STAN KROESE Company Name EXCAVATING INC

Address 16667 NW 48TH City/State/Zip LNC NE 68524

☑ Check if contractor designed system Work Phone 470-3100

D. Engineer/Installer ☐ Check and complete if engineer designed system

Designer Name _____ Firm _____ Work Phone _____

E. This System Will Serve a

☑ Residential Dwelling Number of Bedrooms 3 Is there a Whirlpool Bathtub YES (NO)

☐ Commercial Establishment/Other Facility Specify _____

Design flow in gallons per day _____ Type of Wastewater: ☑ Domestic ☐ Non-Domestic.

DO NOT WRITE BELOW THIS LINE

Approval Process ☐ Municipal Code 24.38 ☐ County Resolution No. 2832

1. **Health Department** Date rec'd 2-3-98 Date frwd 2-3-98 **ACTION** ☑ Approved ☐ Disapproved Signature Ron Magnuson
2. **Supt. Bldg. Insp. or Village Clerk** Date rec'd 2/4/98 Date frwd 2/4/98 **ACTION** ☑ Approved ☐ Disapproved Signature _____
3. **City or County Engineer** Date rec'd 02/02/98 Date frwd _____ **ACTION** ☑ Approved ☐ Disapproved Signature _____

2-3-98, need fence / 9-8-98 MB/RM

Installation Final Written Approval

By Jim Stan Ron Magnuson

Date 9-8-98

Business Office Use Only
Date Rec'd 2/4/98
Amt Paid #150.00
Rec'd By _____ Cash/Check No. 9085

FORM 23-100 10-96 White - Health Dept. Yellow - Engineer Pink - Bldg. Inspector


Lincoln-Lancaster County Health Department
Environmental Health Division
3140 "N" Street • Lincoln, NE 68510-1514
Phone: 402-441-8022

C

Permit Number: 9838 01718

Sewage Disposal System
Preliminary Plan Specifications

Draw a plot plan showing system location, lines, distribution box, tank and laterals, percolation test hole locations, well, residence, compass direction and property lines. Indicate on drawing if residence and well are existing or proposed.

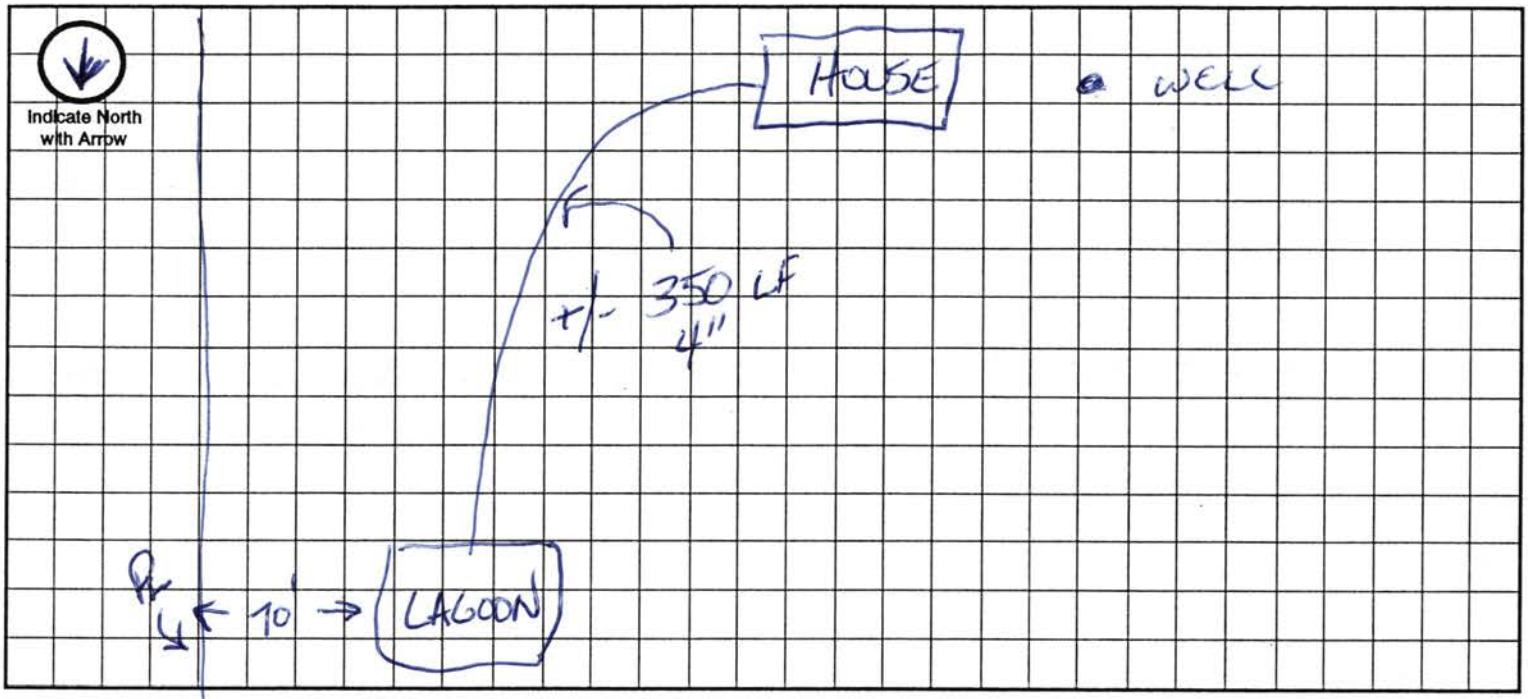

Approximate Scale: _____ ft. = _____ grid line/s

A. System Location (Indicate correct number and street)

Address (no rural route) _____ City _____ NE, Zip _____

B. Proposed Septic Tank/s

Tank Material: ☐ Concrete ☐ Plastic ☑ Other LAGOON

C. Proposed Absorption System (See Form B for Percolation Information)

Percolation Rate _____ (min. per inch) Soil Type: _____ Land Slope: _____ %

Type of Absorption System: ☐ Trench ☐ Bed ☐ Other _____

Total Square Feet of Field Required: _____ sq. ft.

Type of Lateral: ☐ Half-Moon ☐ Perforated Pipe ☐ Other Lateral Material: _____

Capacity of Septic Tank _____ gals Number of Absorption Beds: _____ Number of Distribution Laterals per Bed _____

Total Length of Laterals _____ ft. Number of Trenches _____ Trench Width _____

D. Setbacks Check the Boxes Below if the Required Setback has been Satisfied

Distance From	Private Well	Public Well	Surface Water	Gound Water	Pressure Water Lines	Property Lines	Foundations Yours	Foundations Neighbors	All Other Setbacks
Tank (ft)	50 ☐	500 ☐	50 ☐	NA ☐	25 ☐	20 ☐	15 ☐	25 ☐	☐
Field (ft)	100 ☐	500 ☐	50 ☐	4 ☐	30 ☐	20 ☐	30 ☐	40 ☐	☐
Lagoon (ft)	100 ☑	500 ☑	50 ☑	N/A ☑	30 ☑	50 ☑	100 ☑	200 ☑	☑

E. Required Signatures

Home Building Contractor x Warren L. Ashley Date 2/3/98

Installer Stan Kruse Date 2/3/98

FORM 23-102 10-96

Lincoln-Lancaster County Health Department
Environmental Health Division
3140 "N" Street • Lincoln, NE 68510-1514
Phone: 402-441-8022

D

Permit Number: 9838 01718

Sewage Disposal System
As Built Plans & Specifications

ASHEY LAGOON

Date 2-3-98

System Location (Indicate correct number and street)

Address _____ City _____ NE, Zip _____
(no rural route)

A. Building Sewer

1. Material: ~~2341~~ 4"
   Diameter: _____ in.
2. Distance above basement floor: _____ in.
   or distance below basement floor: 14 in.
3. Distance between dwelling and septic tank: _____ ft.
4. Number of clean-outs: 6 CO
5. Distances to: well or suction line 100+ ft.
   stream 100+ ft.
   pressure line 100+ ft.
   property line 100+ ft.

B. Septic Tank

1. Material: _____
   Number of compartments: _____
2. Capacity: _____ gal.
3. Factory built: ☐ Yes ☐ No
4. Manholes: Over inlet, diameter _____ in.
   Over outlet, diameter _____ in.
   Riser: ☐ above ☐ below grade _____ in.
5. Inlet: ☐ baffle ☐ tee
6. Outlet: ☐ baffle ☐ tee
7. Depth to top of tank, below unfinished grade: _____ in.
8. Distances to: Well or suction line _____ ft.
   Stream _____ ft.
   Pressure line _____ ft.
   Property line _____ ft.

C. Distribution Box

1. Material: _____
   Number available outlets: _____
2. Factory built: ☐ Yes ☐ No
3. Distance from septic tank: _____ ft.

D. Absorption Field


(Provide as-built drawings on back of this form)

1. Type: ☐ Half rounds ☐ Perforated pipe
   Diameter of half round: _____
   or perforated pipe: _____
   Material: ☐ fiberglass ☐ plastic ☐ concrete
   ☐ other _____
2. Lateral lines: Number _____
   Length of each line: _____ ft. _____ ft.
   _____ ft. _____ ft., _____ ft.
3. Trench dimensions: Width _____ ft.
   Slope _____ in/100 ft.
   Average depth _____ in
4. Filter material: _____
   Depth of material _____ in.
5. Distances to: Well or suction line _____ ft.
   Stream _____ ft.
   Pressure line _____ ft.
   Property line _____ ft.

Indicate North with Arrow

Complete "As Built" drawing on back of this form.

Individual Sewage System Design (Example)

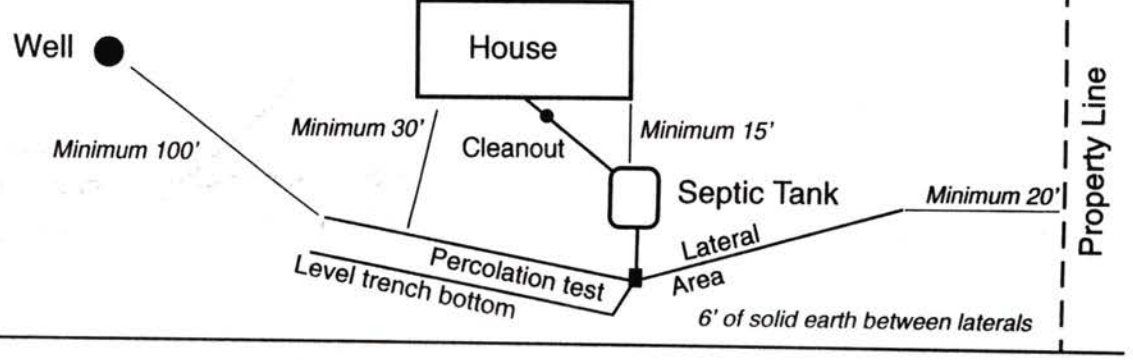

FORM 23-103 10-96


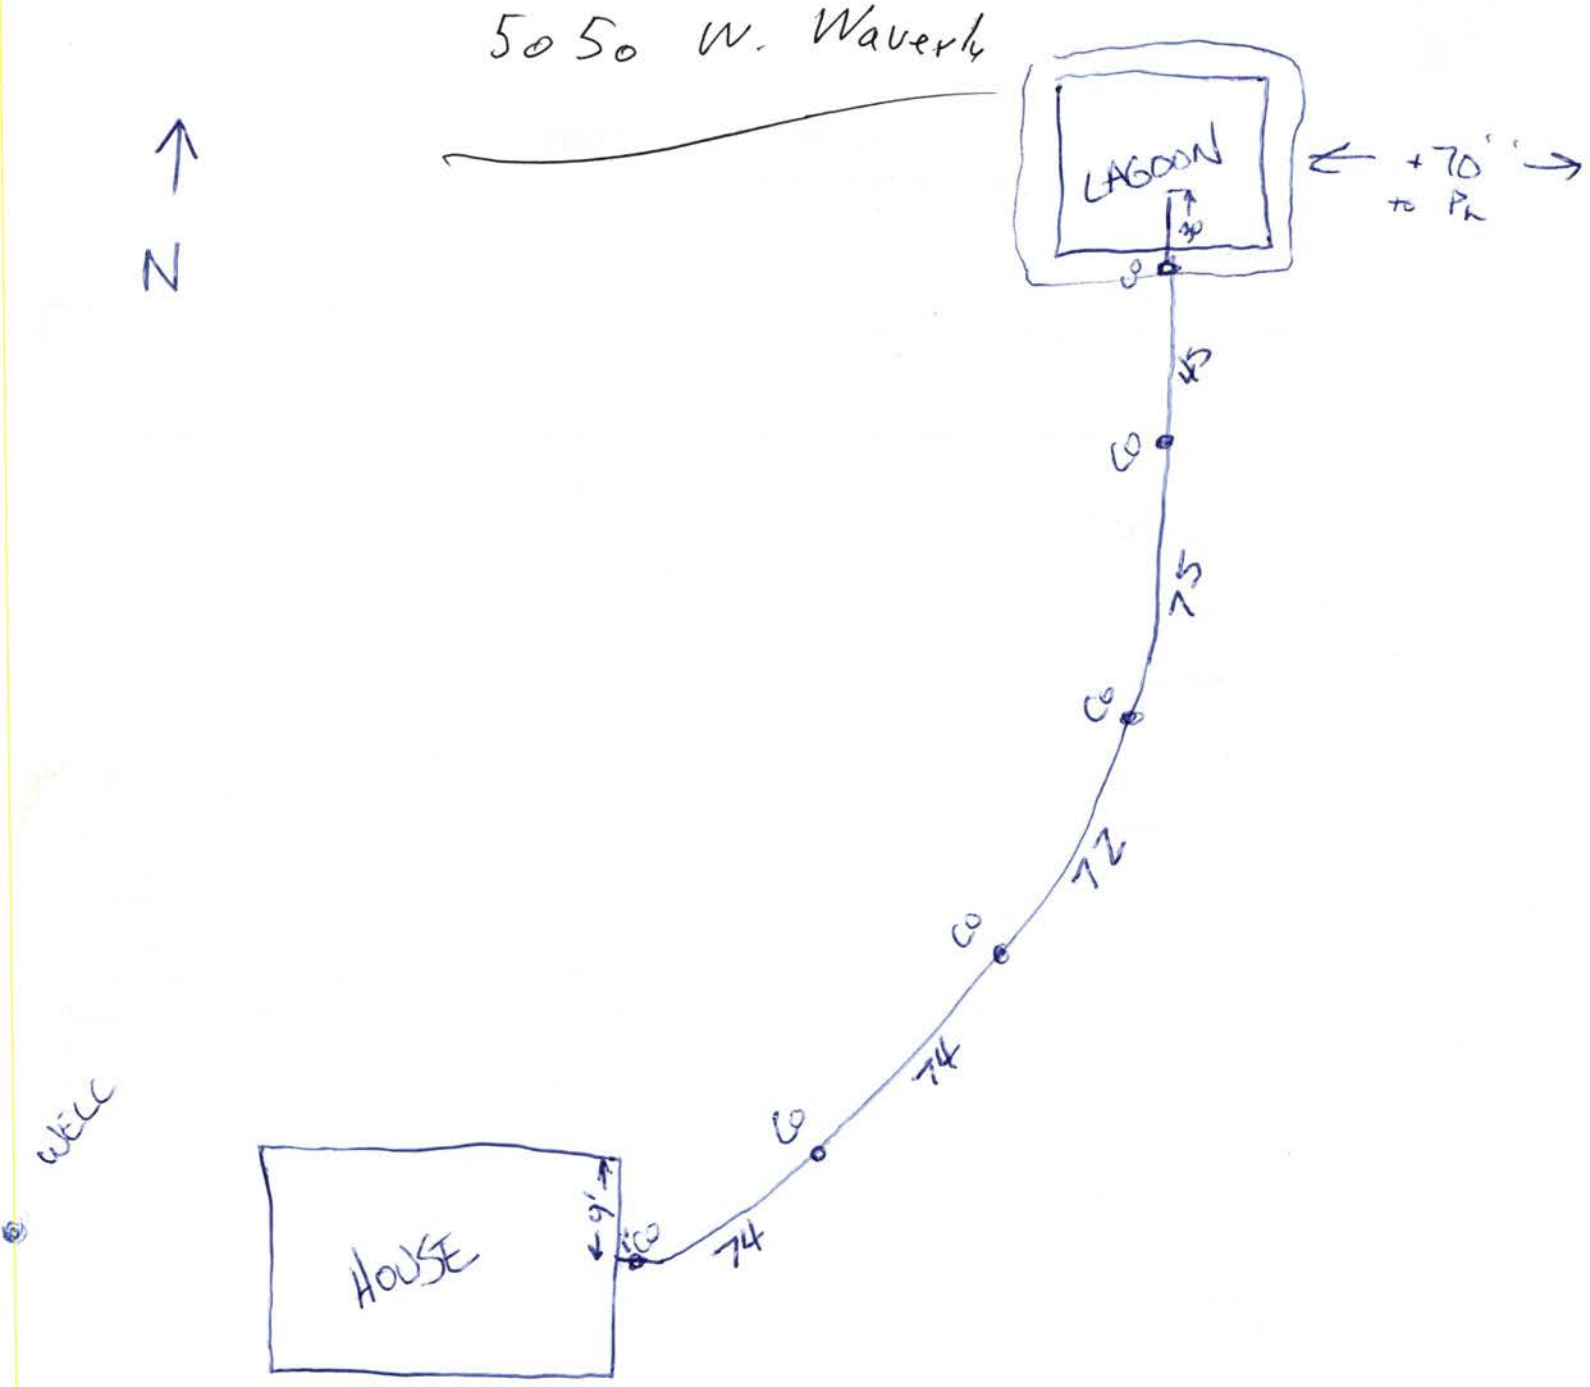

5050 W. Waverly
N
LAGOON
+70'
to Pk
HOUSE
WELL

Exhibit "A"

A tract of land located in Lot 18, Irregular Tracts, in the Southwest Quarter (SW¼) of Section 7, Township 11 North, Range 6 East of the 6th P.M., Lancaster County, Nebraska, more particularly described as follows:

Referring to the Southeast corner of the Southwest Quarter (SW¼) of Section 7, Township 11 North, Range 6 East of the 6th P.M.; thence S88°58'28"W, on the South line of said Southwest Quarter (SW¼), a distance of 574.90 feet; thence N00°07'02"E to a point on the northerly County Road right-of-way line, said point being the Southeast corner of Lot 18, Irregular Tracts, and the true Point of Beginning; thence S88°58'28"W on the northerly County Road right-of-way line and the South line of said Lot 18, a distance of 553.20 feet; thence N00°07'02"E, a distance of 1,583.00 feet; thence N88°58'28"E, a distance of 553.20 feet to a point on the East line of said Lot 18; thence S00°07'02"W on the East line of said Lot 18, a distance of 1,583.00 feet to the true Point of Beginning.

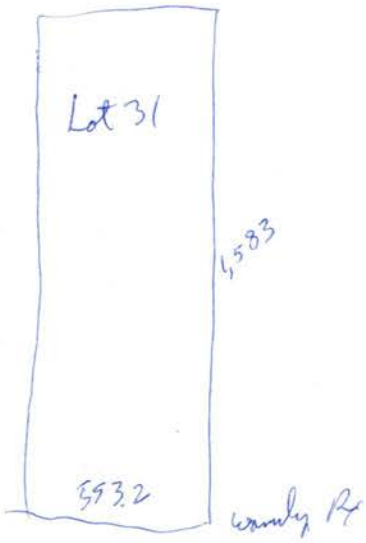


2 740 000 FEET
R. 5 E.
R. 6 E.
480 000 FEET
T. 11 N.
(Joins sheet 12)
North Oak Creek
Oak Creek
Ke
Zp
Ns
Rdy
SmD
McF
PaC2
MrD
JuC
McD
ShD
PaD2
DcD2
ShC
PbC3
SuD2
ShD2
ShE2
Cp
MeC2
GeD2
DcD
GaD
Sk
No
ShC (waverly) 1 RD
New Lagoon
11
12
13
14
18
7
6
1
2