Lincoln-Lancaster County Health Department

ENVIRONMENTAL HEALTH DIVISION
3140 N STREET · LINCOLN, NE 68510-1514 (402) 441-8000

Permit

SEWAGE INSTALLATION
SEPTIC SYSTEM

Permit # 99380207301

Issued 08/25/99
Expires 02/25/00
Revenue Code

FEES: $150.00

Establishment

JUSTIN ROESLER
T10N R8E SEC 14 QTR NE
NE1/4OFNE 1/4-30ACRE
176TH & ADAMS ST

TOTAL: $150.00

Permitee

JUSTIN ROESLER
17600 ADAMS ST
LINCOLN NE 68527

Leon F. Vinci, MPH, Health Director

• POST IN A PROMINENT PLACE • NOT TRANSFERABLE

010916

Lincoln-Lancaster County Health Department
Environmental Health Division
3140 "N" Street • Lincoln, NE 68510-1514
Phone: 402-441-8022

A

Permit Number: 993802073 10f

Sewage Disposal System

Request for Site Clearance and Permit

Include Form B, Form C and Applicable Fees with this Application.

☒ Septic System ☐ Lagoon ☐ Other (Refer to Form C)

The undersigned hereby requests site clearance and permit to construct a Sewage Disposal System in conformance with appropriate resolution or ordinance, as described herein:

PLEASE PRINT OR TYPE — NO ADDRESS AT THIS TIME

A. System Location (Indicate correct number and street)

Address ~~6700 N 148~~ 1760 Adams City Lincoln NE, Zip 68527
(no rural route) 17600 Adams
LCR 4149
Legal Description NE NE 14 10 8 6th PM Lancaster County 30 acres
1/4 1/4 Section Township Range Subdivision Addition Block Lot

Geographical Location (if known): Longitude _____ Latitude _____

☐ Check if system mail address is not the same as the owner's address

ACR 76642

B. Owner NCR 36611

Name Justin Roesler Signature Justin Roesler
Address 1760 Adams City/State/Zip Lincoln Nebr.
☐ Check if owner designed system Home Phone 786-7424 Work Phone _____

C. Contractor

Name NO (SELF) Company Name _____
Address _____ City/State/Zip _____
☐ Check if contractor designed system Work Phone _____

D. Engineer/Installer ☐ Check and complete if engineer designed system

Designer Name RON STUBBADICK Firm _____ Work Phone 786-7824

E. This System Will Serve a

☒ Residential Dwelling Number of Bedrooms 3 Br. Is there a Whirlpool Bathtub YES (NO)
☐ Commercial Establishment/Other Facility Specify _____
Design flow in gallons per day _____ Type of Wastewater: ☒ Domestic ☐ Non-Domestic.

DO NOT WRITE BELOW THIS LINE

Approval Process

☐ Municipal Code 24.38 ☑ County Resolution No. 2832

1. **Health Department**	Date rec'd _____ Date frwd _____	ACTION ☑ Approved ☐ Disapproved	Signature John E Mann
2. **Supt. Bldg. Insp. or Village Clerk**	Date rec'd _____ Date frwd _____	ACTION ☐ Approved ☐ Disapproved	Signature _____
3. **City or County Engineer**	Date rec'd _____ Date frwd _____	ACTION ☐ Approved ☐ Disapproved	Signature _____

Installation Final Written Approval

By Ron Magnuson (could not locate original permit)
Date 8-30-01

Business Office Use Only

Date Rec'd 08/25/99
Amt Paid 150 cc
Rec'd By _____ ~~Cash~~/Check No. 1649

FORM 23-100 10-96 White - Health Dept. Yellow - Engineer Pink - Bldg. Inspector

Lincoln-Lancaster County Health Department
Environmental Health Division
3140 "N" Street • Lincoln, NE 68510-1514
Phone: 402-441-8022

D

Permit Number: 9938020730/

Sewage Disposal System
As Built Plans & Specifications

14-10-8 NE¼NE¼
Roesler

Date 9-27-99

System Location (Indicate correct number and street)

Address 176th Adams 8901 N 176 (no rural route) City Lincoln NE, Zip 68527

A. Building Sewer

1. Material: concrete
   Diameter: _____ in.
2. Distance above basement floor: _____ in.
   or distance below basement floor: 36" in.
3. Distance between dwelling and septic tank: 30 ft.
4. Number of clean-outs: 2
5. Distances to: well or suction line 150 ft.
   stream 800 ft.
   pressure line 100 ft.
   property line 400 ft.

B. Septic Tank

1. Material: concrete
   Number of compartments: 1
2. Capacity: 1000 gal.
3. Factory built: ☒ Yes ☐ No
4. Manholes: Over inlet, diameter 4 in.
   Over outlet, diameter 4 in.
   Riser: ☐ above ☒ below grade _____ in.
5. Inlet: ☒ baffle ☐ tee
6. Outlet: ☒ baffle ☐ tee
7. Depth to top of tank, below unfinished grade: 12 in.
8. Distances to: Well or suction line 150 ft.
   Stream 1100 ft.
   Pressure line 130 ft.
   Property line 300 ft.

C. Distribution Box

1. Material: concrete
   Number available outlets: 3
2. Factory built: ☒ Yes ☐ No
3. Distance from septic tank: 45 feet ft.

D. Absorption Field


(Provide as-built drawings on back of this form)

1. Type: ☐ Half rounds ☐ Perforated pipe
   Diameter of half round: equalizes 24-833
   or perforated pipe: _____ Length
   Material: ☐ fiberglass ☒ plastic ☐ concrete
   ☐ other _____
2. Lateral lines: Number 3
   Length of each line: 59 ft. 68 ft.
   44 ft. _____ ft., _____ ft.
3. Trench dimensions: Width 4ft ft.
   Slope 0 in/100 ft.
   Average depth 2 ft in
4. Filter material: sand
   Depth of material 18 in.
5. Distances to: Well or suction line 200 ft.
   Stream 1000 ft.
   Pressure line 180 ft.
   Property line 300 ft.


Indicate North with Arrow

Complete "As Built" drawing on back of this form.

Individual Sewage System Design (Example)

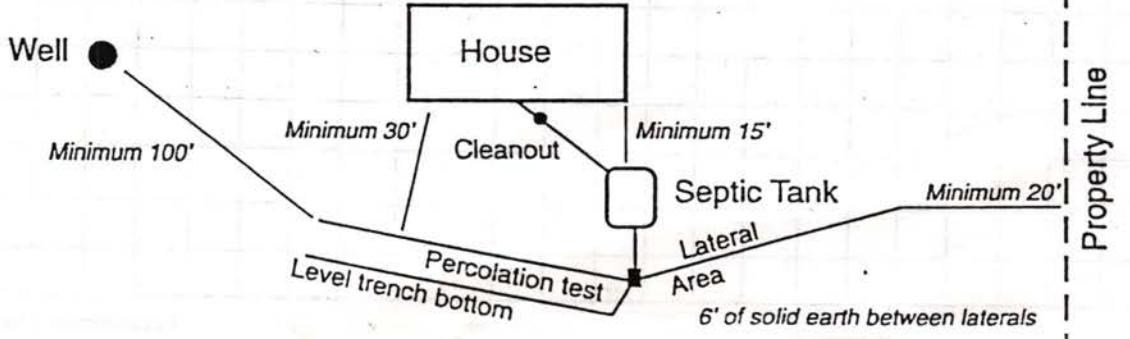

As Built Drawing

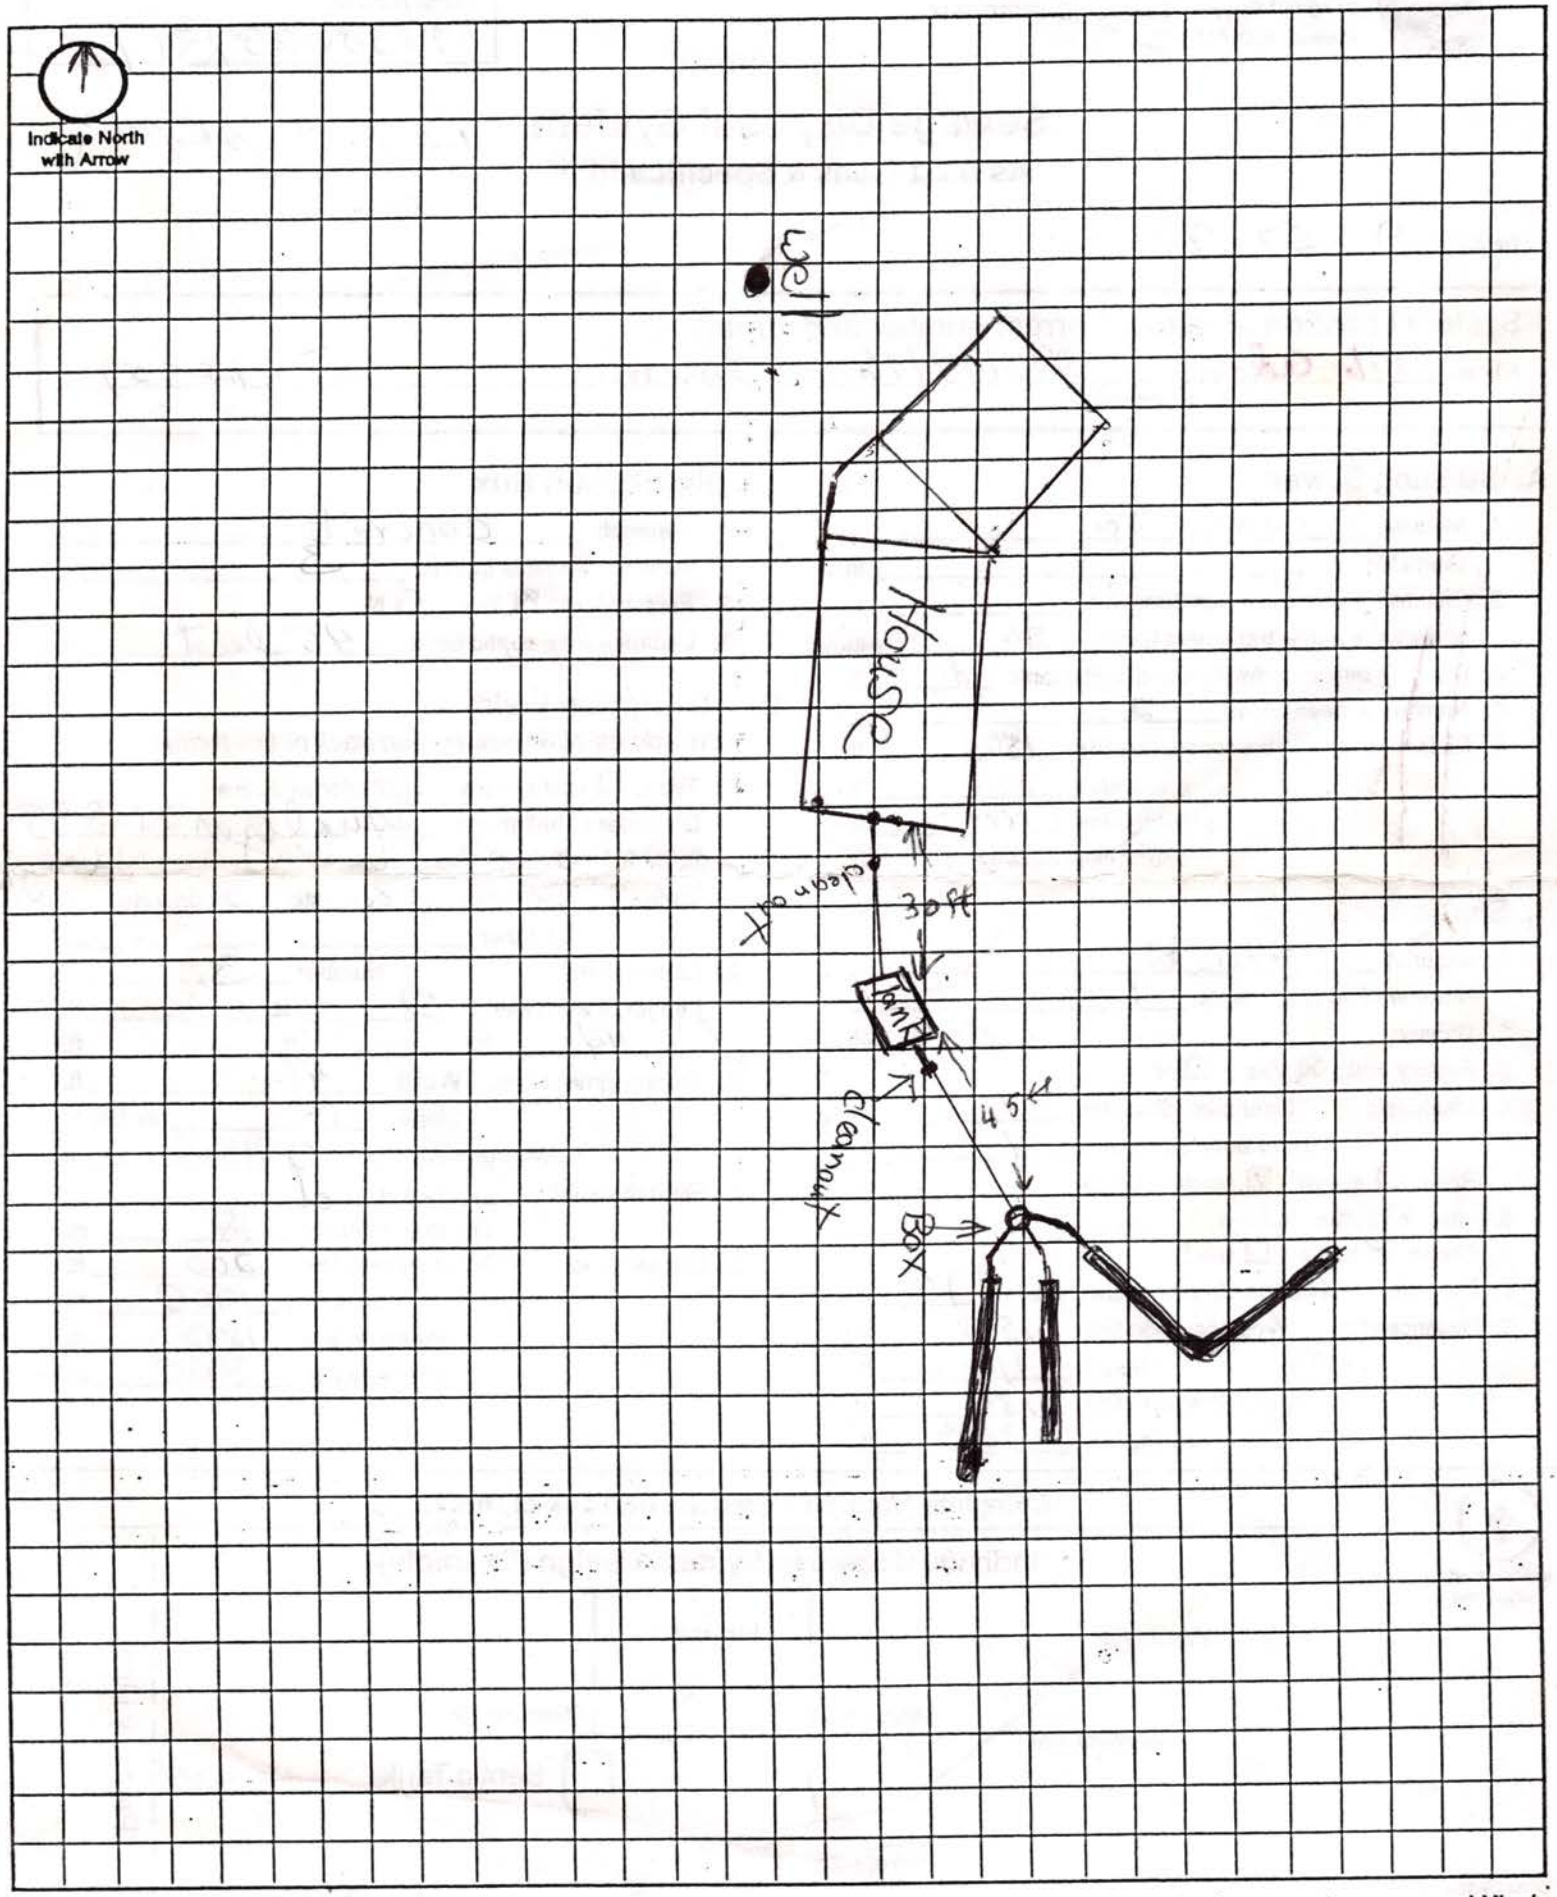

Approximate Scale: _____ ft. = _____ grid line/s